
Ⓐ MILITARY SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIO FREQUENCY, IN-LINE, JAMNUT MOUNTED (BETWEEN SERIES BNC JACK TO SERIES N JACK), CLASS 2

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the adapter described herein shall consist of this document and the latest issue of Specification MIL-A-55339.

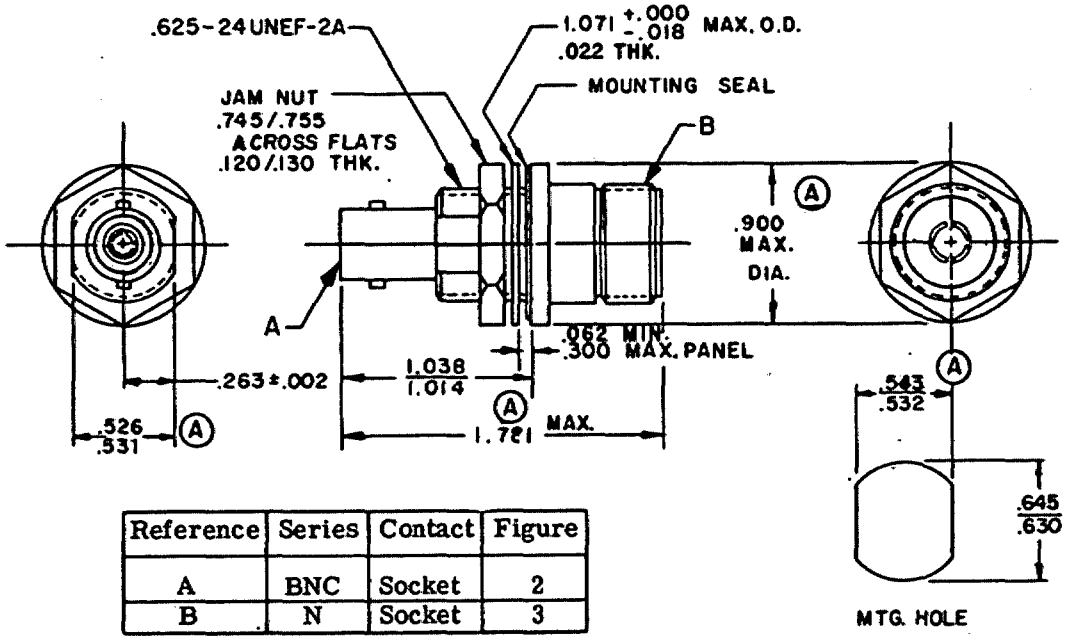

Reference	Series	Contact	Figure
A	BNC	Socket	2
B	N	Socket	3

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. All undimensioned pictorial representations are for reference purposes only.


INCHES	MM	INCHES	MM
.002	.05	.543	13.79
.018	.46	.625	15.88
.022	.56	.630	16.00
.062	1.57	.645	16.38
.120	3.05	.745	18.92
.130	3.30	.755	19.18
.263	6.68	.900	22.86
.300	7.62	1.014	25.76
.526	13.36	1.038	26.37
.531	13.49	1.071	27.20
.532	13.51	1.781	45.24

FIGURE 1. General configuration.

Ⓐ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.

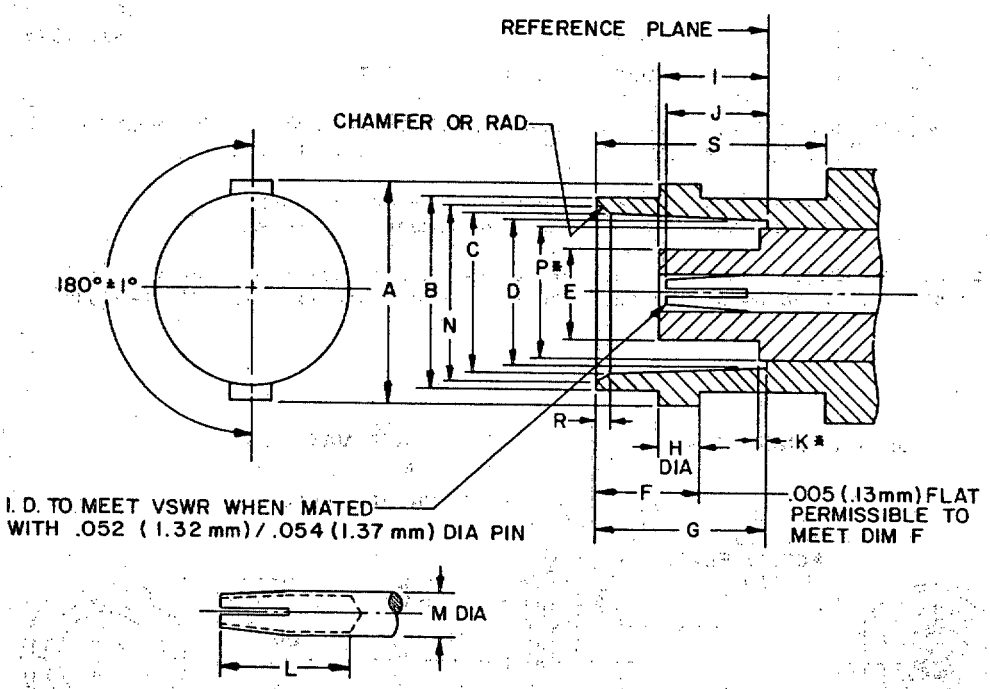

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.432(10.97)	.436(11.07)
B	.378 (9.60)	.382 (9.70)
C	.327 (8.31)	.333 (8.46)
D	.319 (8.10)	.321 (8.15)
E	- - - -	.186 (4.72)
F	.204 (5.18)	.208 (5.28)
G	.327 (8.31)	.335 (8.51)
H	.075 (1.91)	.081 (2.06)
I	.188 (4.77)	.208 (5.28)
J	.186 (4.72)	.206 (5.23)
K*	- - - -	.006 (.15)
L	.195 (4.95)	- - - -
M	.081 (2.06)	.087 (2.21)
N	.346 (8.79)	.356 (9.04)
P*	- - - -	.256 (6.50)
R	.015 (.38)	.030 (.76)
S	.414(10.52)	- - - -


Ⓐ

P dimension applies to that portion (if applicable) of dielectric which extends beyond reference plane by dimension K

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Concave depression .100 (2.54 mm) X .005 (.13 mm) deep between studs permissible.
4. All undimensioned pictorial representations are for reference purposes only.

FIGURE 2. Mating dimensions for BNC socket contact terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.

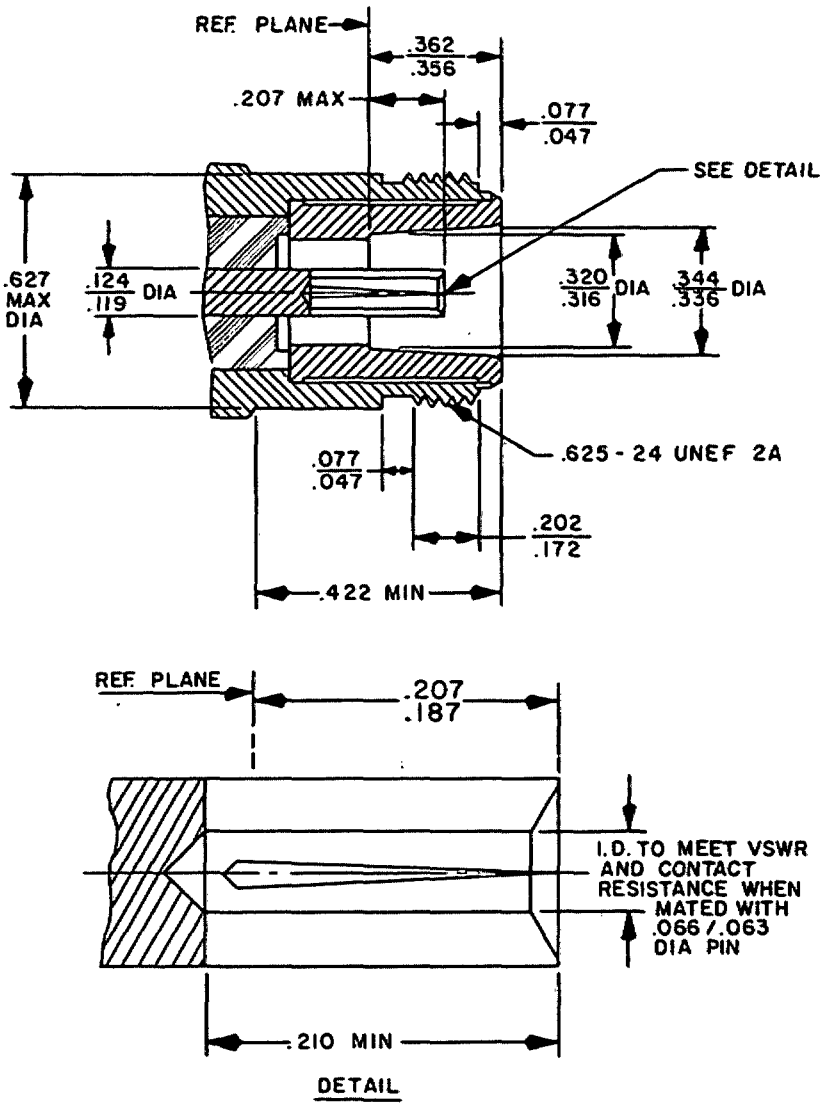

INCHES	MM
.047	1.19
.063	1.60
.066	1.68
.077	1.96
.119	3.02
.124	3.15
.172	4.37
.187	4.75
.202	5.13
.207	5.26
.210	5.33
.316	8.03
.320	8.13
.336	8.53
.344	8.74
.356	9.04
.362	9.19
.422	10.72
.625	15.88
.627	15.93

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Slitting of inner contact optional.
4. All undimensioned pictorial representations are for reference purposes only.

FIGURE 3. Mating dimensions for N socket contact terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.

DESIGN AND CONSTRUCTION:

General configuration: See figure 1.

Impedance: 50 ohms, nom.

Working voltage: Sea level - 500 Vrms.
70,000 feet - 125 Vrms.

Frequency range: 0 to 4 GHz.

Temperature range: -65° to +165°C.

PERFORMANCE (installation torque of 6 to 10 in. lb, series N).

Dimensions: See figures 1, 2, and 3.

Center contact retention:	Series BNC	Series N
Axial force (lb, min)	6	6
Torque (in. oz, min)	N/A	N/A

Force to engage and disengage:	Series BNC	Series N
(A) Longitudinal force (lb, max)	3.0	N/A
Torque (in. lb, max)	2.5	6.0

Coupling proof torque: N/A

Mating characteristics:

Center contact (socket):	Series BNC	Series N
Oversize test pin dia (in., min)	.053	.074
Insertion depth (in., min)	.125	.125
No. of insertions	1	1
Max test pin (insertion force test):		
Steel test pin dia (in., min)	.054	.066
Pin finish (microinches)	16	16
Insertion force (lb, max)	2	2
No. of insertions	1	1
Min test pin (withdrawal force):		
Steel test pin dia (in., max)	.052	.063
Pin finish (microinches)	16	16
Withdrawal force (oz, min)	2	2
No. of withdrawals	1	1

Outer contact: Not applicable.

Permeability: <2.0.

Seal: Hermetic - Not applicable.
Pressurized - 30 psi.
Weatherproof - 30 psi.

Insulation resistance: 5,000 megohms, min.

VSWR: 1.30, max at .5 to 4 GHz.

RF leakage (total): -55 dB, min, 2 to 3 GHz.

RF insertion loss: .2 dB, max, 3 GHz
($.012\sqrt{F}$ (GHz) dB max tested at 3 GHz).

Durability: 500, min.
Rate: 12 c/m, min.

Dielectric withstanding: Test voltage - 1,500 Vrms, min (sea level).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.

Contact resistance (milliohms, max):

Contact	Initial	After
Center	2.0	2.5
Outer	0.2	N/A

Vibration, high frequency: Interruptions - 1 μs, max.

Shock: Test condition I.

Thermal shock: Test condition C.

Moisture resistance: 200 megohms, min.

Corona level: Voltage - 375 V, min.
Altitude - 70,000 feet, min.

RF high potential withstanding voltage: RF voltage - 1,000 Vrms, min.
Frequency - 5 MHz, min.

Salt spray (corrosion): Applicable.

Coupling mechanism retention force: Not applicable.

MARKING: As specified in MIL-A-55339.
Part No. M55339/25-00606.

TABLE I. Cross reference of part numbers.

Part number	Superseded part number or type designation 1/
M55339/25-00606	51C12929 UG-606/U

1/ The superseded part number or the type designation is for cross reference only. Where a superseded part number or type designation is not given, none was assigned or will be assigned. The part number M55339/25-00606 shall be used in all cases for marking and identifying the adapter.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH, OS
Air Force - 11, 99
DLA - ES

User activities:
Army - AT
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3057-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-A-55339/31A

NAME OF ORGANIZATION AND ADDRESS

HQ. USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.

FOLD

HQ. USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



HQ. USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.