INCH-POUND


MIL-DTL- 15665/109A
13 March 2017
SUPERSEDING
MIL-DTL-15665/109
15 May 2012

DETAIL SPECIFICATION SHEET

INSIGNIA, COLLAR, ENLISTED, ELECTRONIC WARFARE, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.

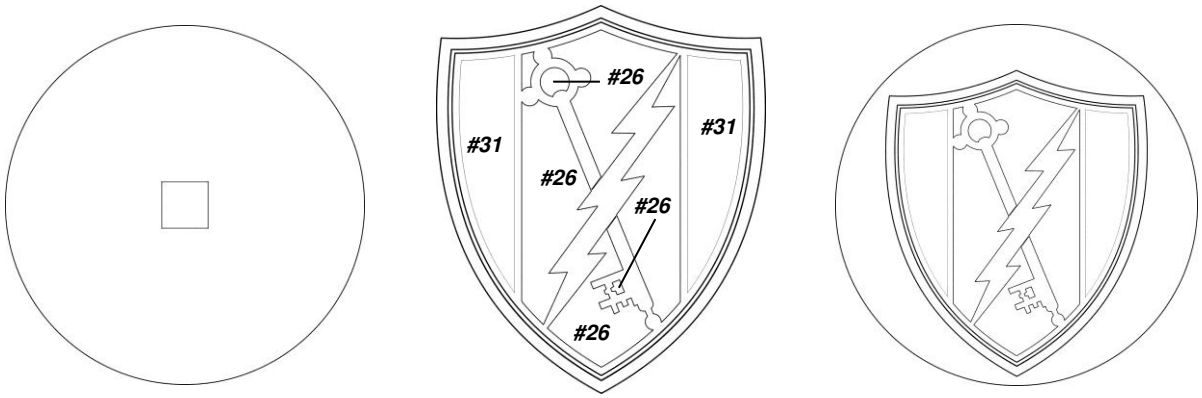

BASE (DISC) **DEVICE** **ASSEMBLED**

DASH NUMBERS:
-1 Enlisted Insignia, Base (Disc)
-2 Enlisted Insignia, Device
-3 Enlisted Insignia, Assembled

MATERIAL (-1, -2 and -3): Red Brass 85/15 (UNS Alloy No. C-230)

FINISH (-1,-2 and -3): 22K Gold Plated, Mirror-like Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 9.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:05Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
DIAMETER:
-1, -3: 1 inch + 1/64 inch - 0
HEIGHT:
-2: 7/8 inch (REF)
THICKNESS:
-1: 0.040 inch ± 0.005 inch

-2 (across top of shield): 0.070 ± 0.005 inch

-3 (across top of shield): 0.110 ± 0.010 inch

ATTACHING DEVICES: -1 shall be manufactured and -3 assembled in accordance with TIOH Manufacturing Drawing Number 4-4-89. The use of a Type A or a Type C disc is at the manufacturer's discretion.

EPOXY (-2): Epoxy enamel shall be applied as indicated above and as specified in the table below, and shall match the TIOH Hard Enamel Color Chip Number listed. Hard cloisonné enamel may be used in lieu of epoxy enamel. If hard Cloisonné enamel is used, the required base material for -2 shall be Gilding Metal 95/5 (UNS Alloy C-210):

TIOH HARD ENAMEL COLOR CHIP NUMBER	ITEM	LOCATION
BLACK #26	-2	Central panel of shield, to include interior circle at top of key and interior nook at bottom of key
YELLOW #31	-2	Left and right panels of shield

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. At the manufacturer's discretion, and for commercial sale only, -1 and -2 may be finished as follows: 24K Gold Plated, Mirror-like Polished, and shall match TIOH Metal Finish Chip Number 6.

3. When a manufacturer elects to finish -1 and -2 according to the provision made in NOTE 2, the manufacturer may deviate from MIL-DTL-15665 by using nickel undercoating prior to applying the requisite 24K gold plating.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:05Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2017-159)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:05Z
Check the source to verify that this is the current version before use.