NOT MEASUREMENT SENSITIVE


MIL-DTL-15665/113B
6 July 2021
SUPERSEDING
MIL-DTL-15665/113A
16 March 2020

DETAIL SPECIFICATION SHEET


INSIGNIA, AIDE, CHIEF AND VICE CHIEF, NATIONAL GUARD BUREAU, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.

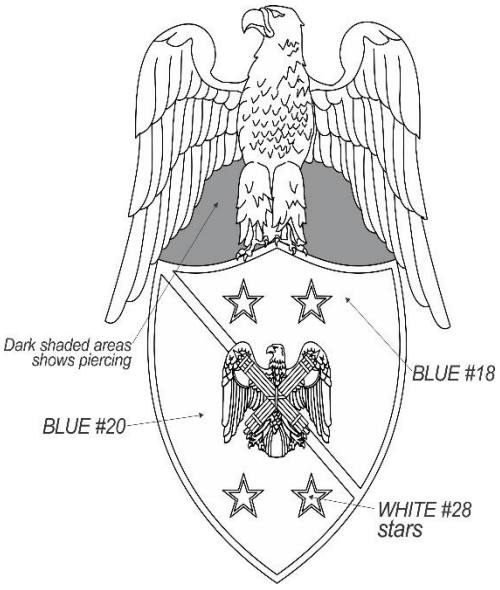


AIDE, CHIEF

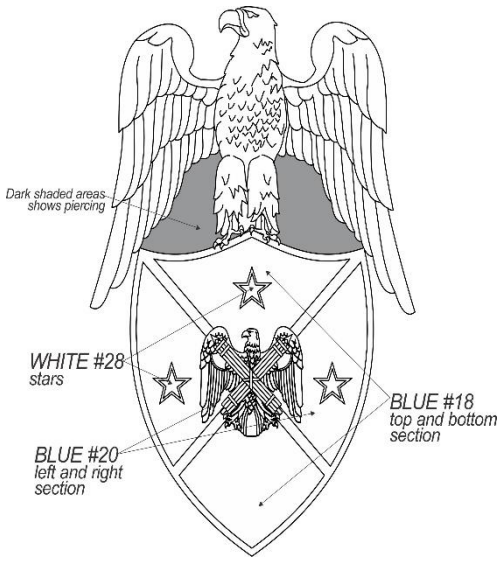


AIDE, VICE CHIEF

DASH NO.
-1: Aide, Chief
-2: Aide, Vice Chief

MATERIAL: Red Brass 85/15 (UNS Alloy No.C-230).

FINISH:
EAGLE: 24K Gold Plated, Matte Finish, Polished Highlights, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:06Z
Check the source to verify that this is the current version before use.

SHIELD: 24K Gold Plated, Mirror-like Polished, and shall match The Institute of Heraldry TIOH Metal Finish Chip Number 6.
DEVICE: 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

DIMENSIONS:
EAGLE AND SHIELD:
HEIGHT: 1-1/4 inches (REF)
WIDTH: 13/16 inch (REF)
THICKNESS (Edge of Shield): 0.069 inch ± 0.010 inch
DEVICE:
HEIGHT: 1/4 inch (REF)
WIDTH: 5/16 inch (REF)
Thickness: 0.085 inch ± 0.010 Inch

ATTACHING DEVICE:
1. Attaching device should be prong and wing type clutch.

2. Prongs should be located on the vertical center line equidistant from each end and 7/8 inch ± 1/64 apart.

EPOXY: Epoxy shall be applied as indicated above and as specified in the table below, and shall match the TIOH Hard Enamel Color Chip Number listed. Hard cloisonné enamel may be used in lieu of epoxy enamel. If hard Cloisonné enamel is used, the required base material for -1 and -2 shall be Gilding Metal 95/5 (UNS Alloy C-210):

| TIOH HARD ENAMEL COLOR CHIP NUMBER | ITEM | LOCATION |
|---|---|---|
| Blue #18 | -1, -2 | Shield, as indicated in the above drawing |
| Blue #20 | -1, -2 | Shield, as indicated in the above drawing |
| White #28 | -1, -2 | All the stars on the shield |

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pierced areas as indicated.

3. The device should be superimposed and secured to the shield by two rivets or soft soldered. When rivets are used, they should be solid and fabricated from any type. brass. The rivets should be located on and soldered to the vertical center line of the device. The device should be located on the insignia as indicated.

4. Eagle on Shield will be modeled.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:06Z
Check the source to verify that this is the current version before use.

5. May be manufactured using 22 karat gold plate with nickel underplating as follows for commercial sale only:

EAGLE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Chip Number 11.
SHIELD: Epoxy, Gold Plated, Mirror-like Polished and shall match TIOH Metal Chip Number 9.
DEVICE: Gold Plated, Matte Finish and shall match TIOH Metal Chip Number 10

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review Activity:
DLA - CT

(Project No. 8455-2021-584)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:06Z
Check the source to verify that this is the current version before use.