NOT MEASUREMENT SENSITIVE


MIL-DTL-15665/113C(IH)
8 January 2026
SUPERSEDING
MIL-DTL-15665/113B(IH)
6 July 2021

DETAIL SPECIFICATION SHEET


# INSIGNIA, AIDE, CHIEF AND VICE CHIEF, NATIONAL GUARD BUREAU U. S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.

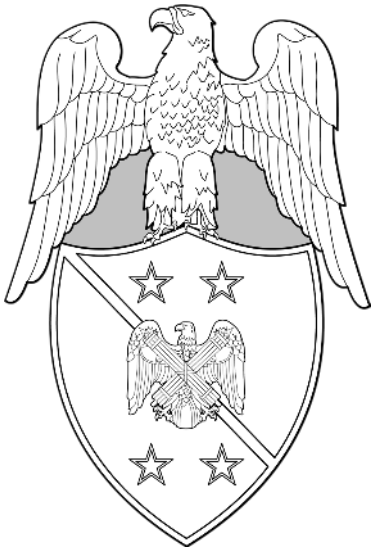

**AIDE, CHIEF**

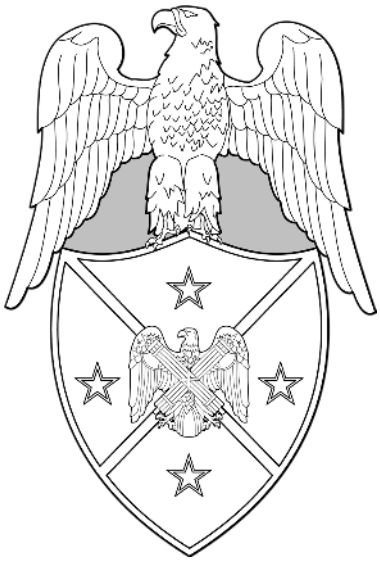

**AIDE, VICE CHIEF**

DASH NO.
-1: Aide, Chief
-2: Aide, Vice Chief

MATERIAL (-1 AND -2): Red Brass 85/15 (UNS Alloy No. C- 230)

FINISH:
-1 and -2: 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
SHIELD: 24K Gold Plated, Mirror-Like Polished and shall match TIOH Metal Finish Chip number 6.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:06Z
Check the source to verify that this is the current version before use.

DEVICE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSION:
SHIELD AND EAGLE:
HEIGHT (Overall): -1 and -2: 1-1/4 inches (REF)
WIDTH (Overall): 1/4 inch (REF)
THICKNESS (At thickest point of shield): -1 and -2: 0.085 ± 0.005 inch.
DEVICE:
HEIGHT (Overall): 1/4 inch (REF)
WIDTH (Overall): 1/4 (REF)
THICKNESS (At thickest point): 0.065 ± 0.005 inch.

ATTACHING DEVICE:
1. Attaching device shall be prong and clutch type.

2. Prongs shall be located on the vertical center line, equidistant from each end and 7/8 inch ± 1/64 inch apart.

EPOXY: Epoxy resin shall be applied to the Insignia as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy No.C-210).

| TIOH HARD ENAMEL COLOR CHIP NUMBER | ITEM | LOCATION |
|---|---|---|
| Blue #18 | -1 | Top Portion of Shield |
| Blue #20 | -1 | Bottom Portion of Shield |
| Blue #18 | -2 | Top and Bottom Portions of Shield |
| Blue #20 | -2 | Left and Right Portions of Shield |
| White #28 | -1, -2 | All the Stars on the Shield |

NOTES:
1: The term (REF) refers to the measurements taken from the Government furnished hub or die.

2: For -1 and -2, Shaded areas to be pierced.

3: For -1 and -2: The device shall be superimposed and secured to the shield by two rivets or soft soldered. When rivets are used, they shall be solid and fabricated from any type of brass. The rivets shall be located on and soldered to the vertical center line of the device. The device shall be located on the insignia as indicated.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:06Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-044)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:06Z
Check the source to verify that this is the current version before use.