INCH-POUND

MIL-DTL-15665/96
5 September 2001

DETAIL SPECIFICATION SHEET

INSIGNIA, COLLAR, FIELD BAND, U.S. ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

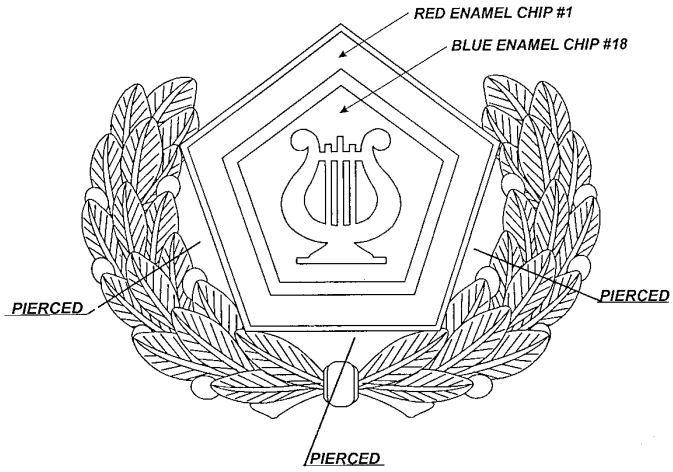

MATERIAL: Red Brass

FINISH: Hard Enameled or Epoxied, Nickel Plated, 22K Gold Plated, Matte Finish, Polished Highlights, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip No. 11.

DIMENSIONS:

HEIGHT (overall): 1-1/8 inches (REF)
WIDTH (overall): 1-1/2 inches (REF)
THICKNESS (at thickest point): 0.108 ± 0.010 inch

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:01Z
Check the source to verify that this is the current version before use.

3. Enameled/epoxied areas shall be as indicated above. The colors shall conform to TIOH Hard Enamel Chip numbers listed below:

COLOR	CHIP NUMBER
Ultramarine Blue	18
Red	1

4. Attaching device shall be a screw post with a thumb nut. The screw post shall be 0.25 inches in length with a 0.061 inch diameter. The thumb nut shall be a button-back type and shall be 3/8 inch ± 1/64 inch in diameter with a covered, domed top and shall securely fasten to the screw post. The screw post and thumb nut shall be fabricated from any type nickel or brass.

5. The screw post shall be soldered or electronically fused to the insignia at the intersection of the vertical and horizontal center lines.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0057/001)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:01Z
Check the source to verify that this is the current version before use.