INCH-POUND

MIL-DTL-15665/97A
6 April 2016
SUPERSEDING
MIL-DTL-15665/97
5 September 2001

# DETAIL SPECIFICATION SHEET

## INSIGNIA, BERET, ENLISTED, SERGEANT MAJOR OF THE U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.




MATERIAL: Red Brass 85/55 (UNS Alloy No. C- 230)

FINISH:
SHIELD BASE:
Epoxy resin, Nickel Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.
Outer Edge and Dike Lines: 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
EAGLE DEVICE: Epoxy resin, 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

DIMENSIONS:
SHIELD BASE:
HEIGHT (Overall): 1-1/8 inches (REF)
THICKNESS (Minimum): 0.080 inch ± 0.005 inch
EAGLE DEVICE:
HEIGHT (Overall): 15/32 inch (REF)
TICKNESS (Minimum): 0.060 inch ± 0.005 inch

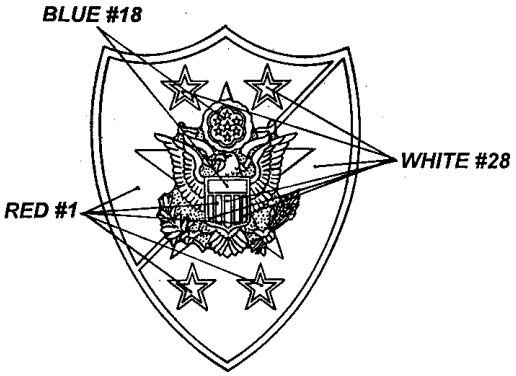

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:02Z
Check the source to verify that this is the current version before use.

ATTACHING DEVICE:

1: Attaching device shall be prong and wing type clutch.

2: Two prongs shall be located on the vertical center line of the shield base, equidistant from top and bottom and 3/4 inch ± 1/64 inch apart.

3: The device shall be secured to the base with two rivets. The rivets shall be solid and shall be fabricated from any type brass. The rivets shall be located on the vertical center line of the device.

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. The insignia shall consist of two parts: the shield base and the eagle device.

3. At the option of the manufacturer and for commercial sale only, insignia may be manufactured using 22K gold plate with a mirror-like polished finish and nickel underplating and shall match TIOH Metal Finish Chip No. 9.

EPOXY: Epoxy resin shall be applied to the Insignia as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy No.C-210).

| TIOH HARD ENAMEL COLOR CHIPS | |
|---|---|
| **COLOR** | **CHIP NUMBER** |
| Red | #1 |
| Blue | #18 |
| White | #28 |

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2016-392)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:02Z
Check the source to verify that this is the current version before use.