
PERFORMANCE SPECIFICATION SHEET

POST OFFICE FURNITURE, TYPES 1 - 20

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the furnishings described herein shall consist of this specification sheet and performance specification, MIL-PRF-32038.

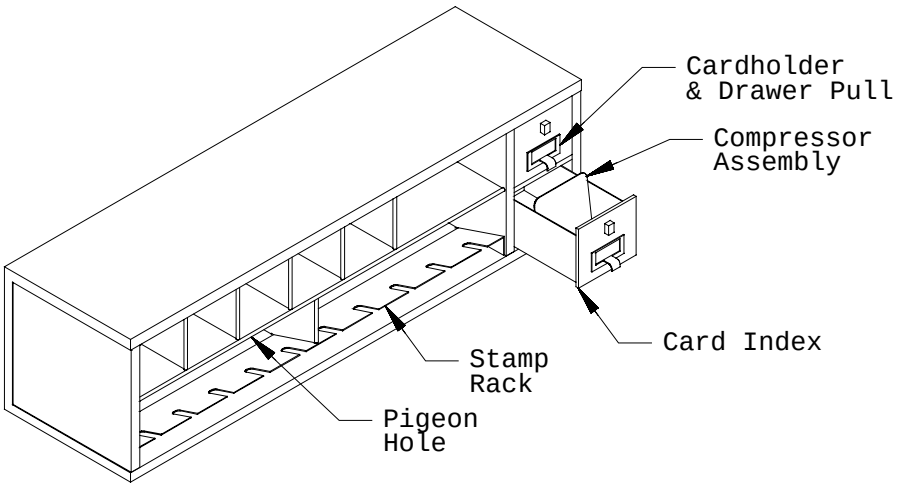


Type 1

Card Index, Pigeon Hole & Stamp Rack

AMSC N/A FSC 2090


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

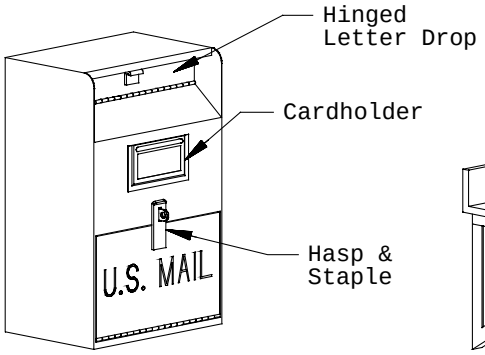


Type 2

Mail Box

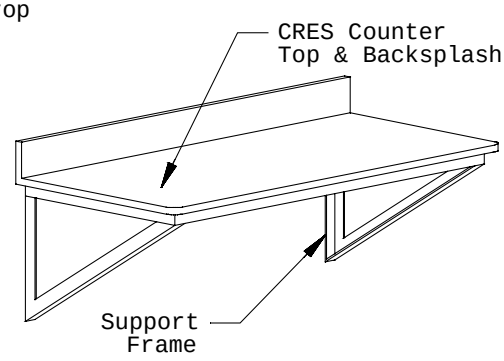

Type 3


Counter

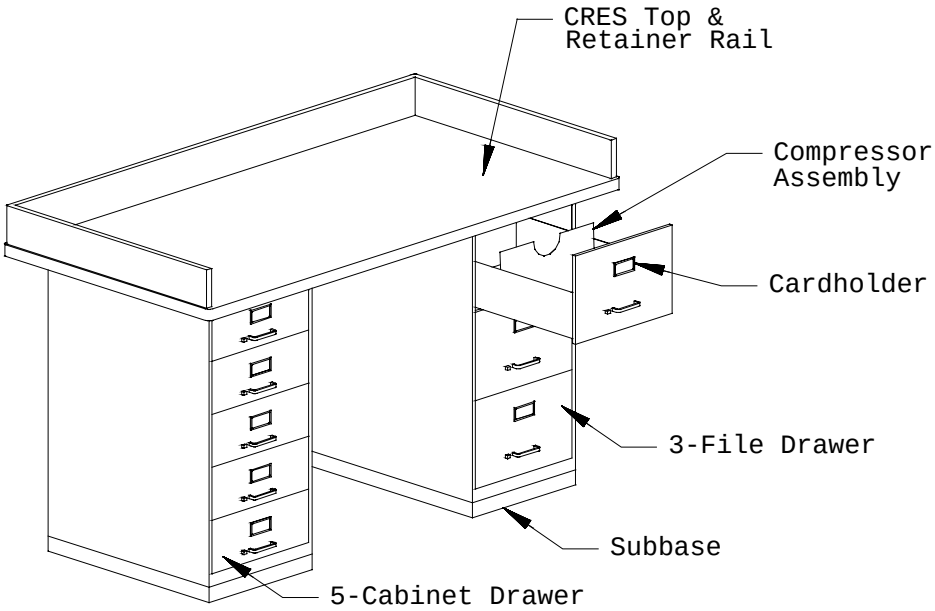

Types 4 & 5


Dumping Table

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

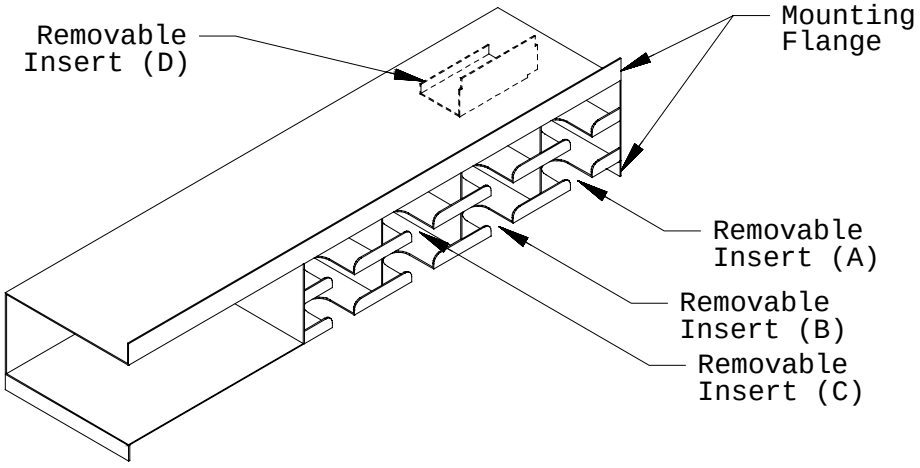

Type 6


Forms Rack

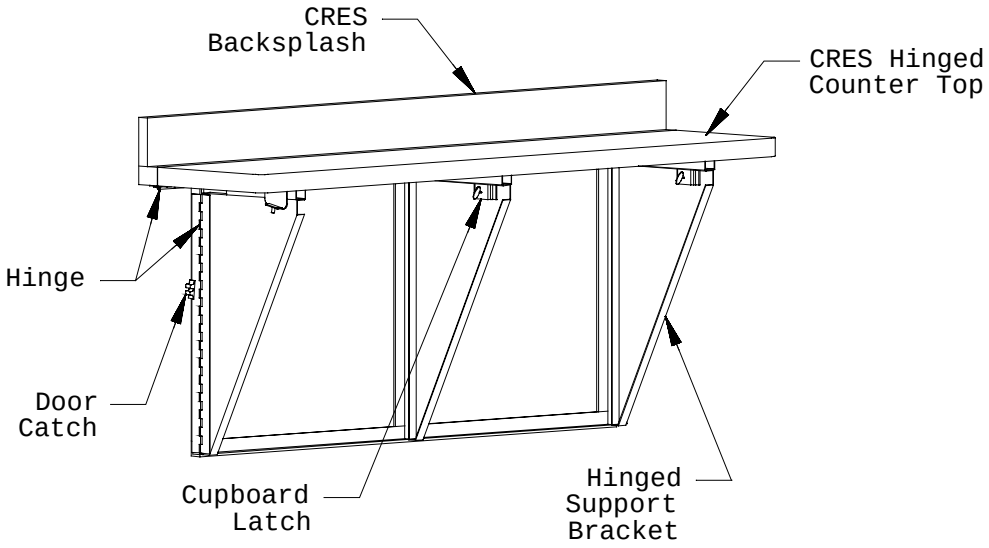

Types 7 & 8


Hinged Counter

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

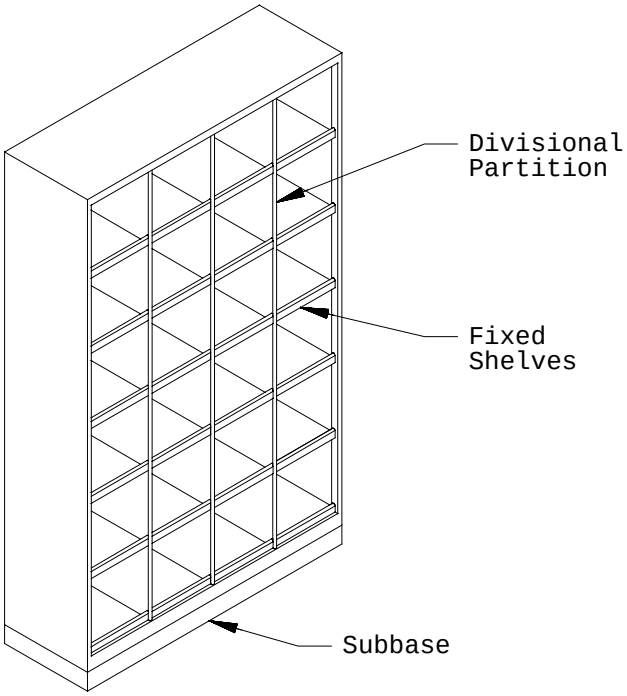


Type 9

Mail Bin

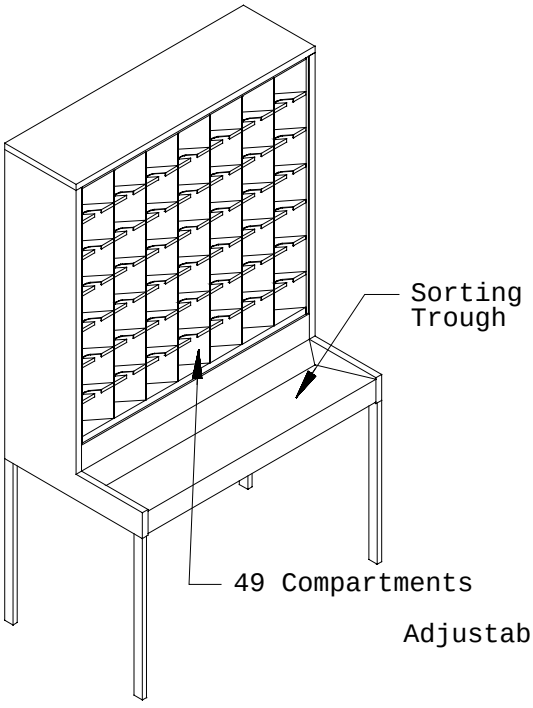

Type 10


Sorting Case (Letters)

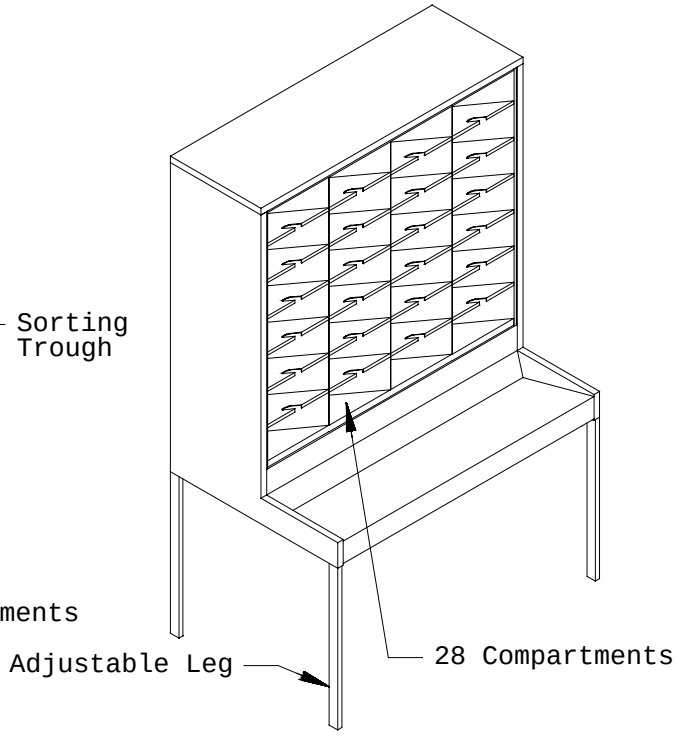

Type 11


Sorting Case (Flats)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

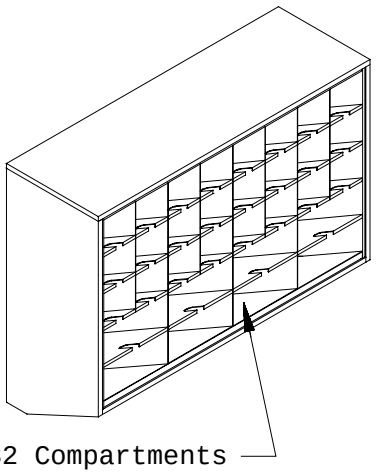


Type 12

Sorting Case (Letters & Flats)

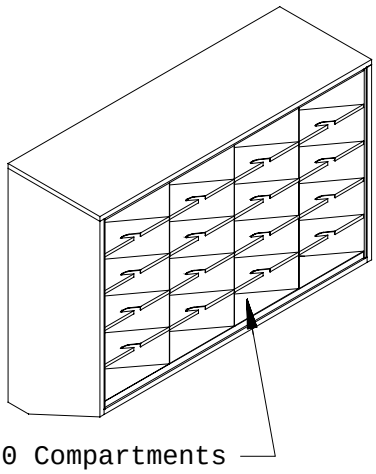

Type 13


Sorting Case (Flats)

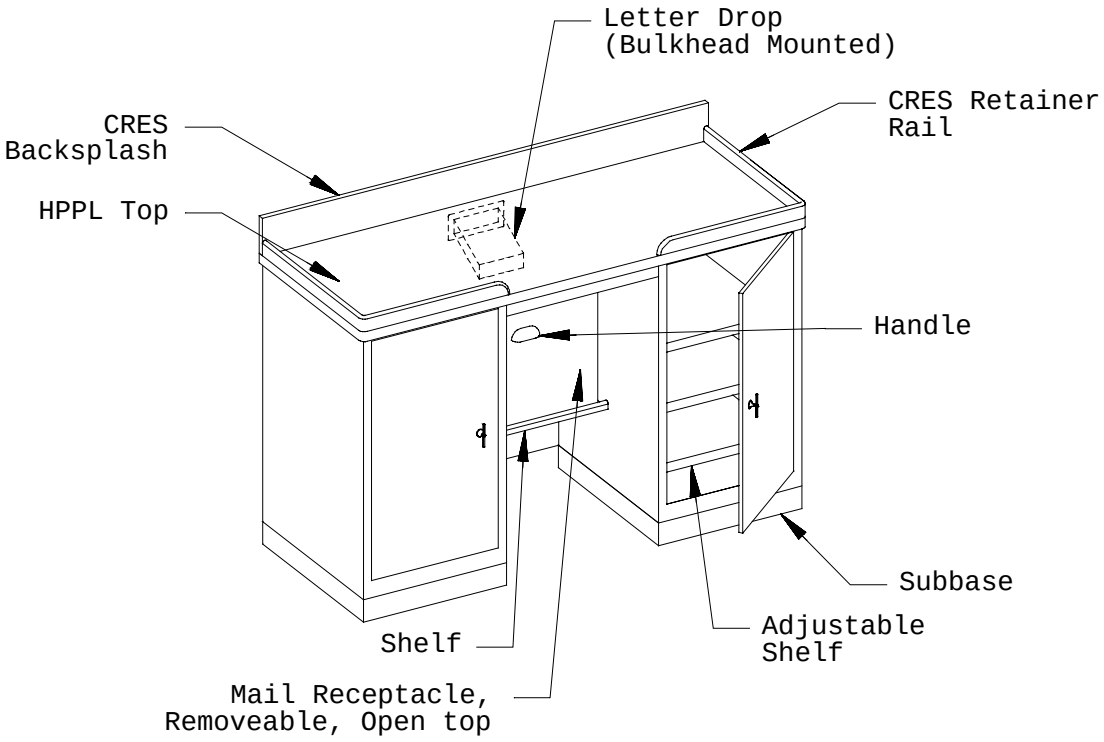

Type 14


Sorting Table

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

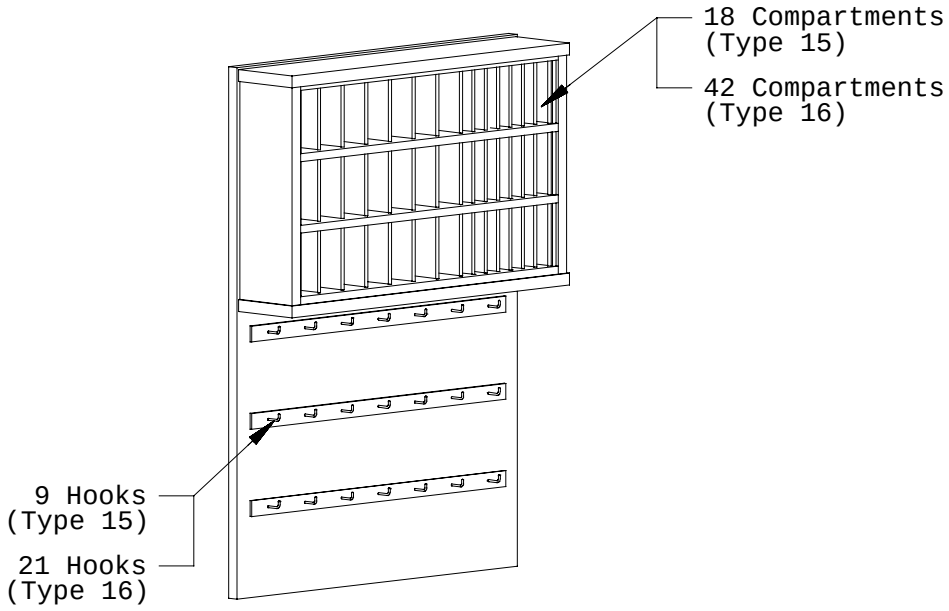

Types 15 & 16

Strip Label & Fly Tag Rack

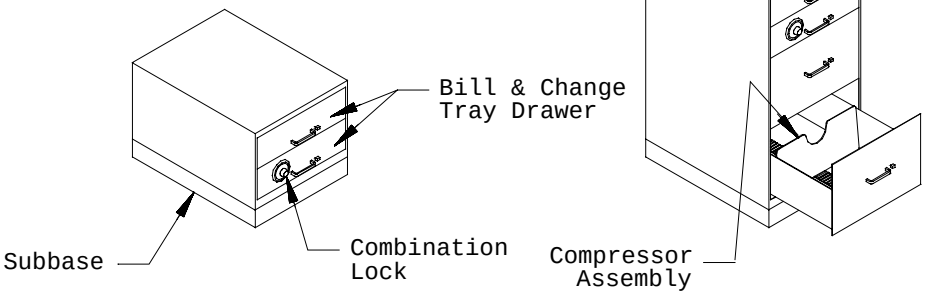


Type 17

Safe Drawer Unit

Type 18


Safe Drawer Unit

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

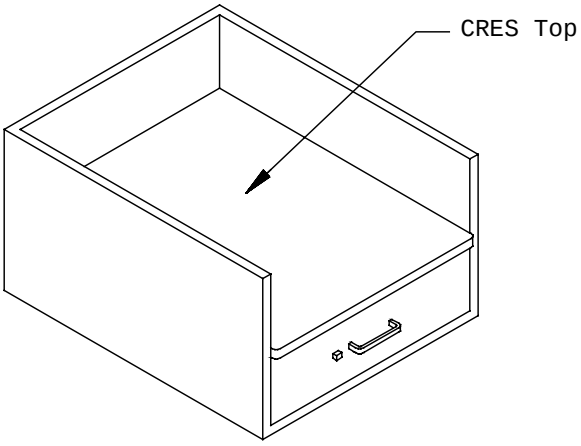

Type 19

Drawer/Counter Unit

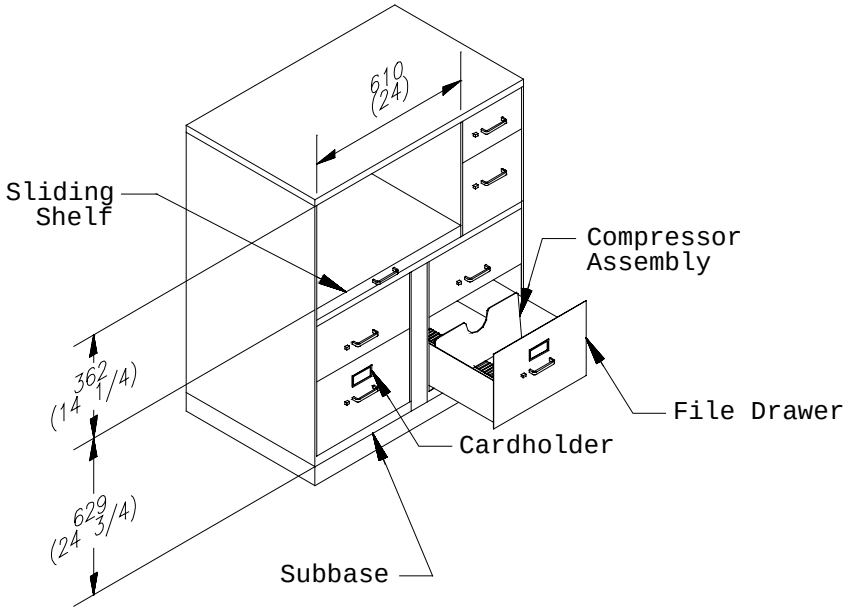

Type 20

Cabinet Unit

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Post office equipment size and weight shall be in accordance with Table I.

2. Type 1 card index, pigeon hole, and stamp rack pigeon holes shall be 117 mm (4-5/8 in) wide. Except for pigeon hole on the right side, which shall be 248 mm (9-3/4 in). Stamp rack finger slots shall be 16 mm (5/8 in) wide by 44 mm (1-3/4 in) deep spaced 86 mm (3-3/8 in) centers. A compressor assembly shall be provided for both card index drawers. The inside dimensions of the card index shall be 133 mm (5-1/4 in) wide by 111 mm (4-3/8 in) high to accommodate 76 mm (3 in) by 127 mm (5 in) index cards.

3. Type 2 mail box shall be marked with red enamel 51 mm (2 in) high inscription as shown. Type 2 mail box shall be constructed of steel.

4. Type 3 counter may be ordered in various widths to suit shipboard conditions. Weight of counter with support is approximately 4 kg (10 lb) per linear foot. When specified by procuring activity, counter may be ordered without support frame to allow for installation of counter directly to base cabinets below.

5. Types 4 and 5 dumping table drawer cabinets shall be 457 mm (18 in) wide by 711 mm (28 in) deep by 927 mm (36-1/2 in) high. Three file drawers shall be provided with an adjustable file compressor. Top shall overhang drawer cabinets 102 mm (4 in) at front, back, and ends.

6. Type 6 forms rack shall be constructed for installation below a counter top. Spacing between vertical dividers shall be 114 mm (4-1/2 in). Four removable inserts shall be provided and installed as shown. Depth of inserts shall be (A) 32 mm (1-1/4 in), (B) 57 mm (2-1/4 in), (C) 82 mm (3-1/4 in) and (D) 108 mm (4-1/4 in), with matching attachment holes in back of each tray to allow relocation of inserts by post office personnel.

7. Types 7 and 8 hinged counter tops shall be 305 mm (12 in) deep and provided with a door catch assembly for securing top to mounting frame in stowed position. Each hinged support bracket shall be provided with a cupboard catch for securing brackets to top in working position and a catch assembly with bumper for securing brackets to frame in stowed position.

8. Type 9 mail bin shelving shall be spaced 305 mm (12 in) vertically with divisional partitions spaced 279 mm (11 in) horizontally.

9. Type 10 compartments shall be 325 mm (12-13/16 in) deep. Type 11 compartments shall be 413 mm (16-1/4 in) deep. Types 10 - 13 shelves shall be spaced 140 mm (5-1/2 in) vertically and sloped down 30 degrees front to back. Depth of shelves shall be 254 mm (10 in) for letters and 356 mm (14 in) for flats. Shelf finger slots shall be 32 mm (1-1/4 in) wide by 76 mm (3 in) deep. Width of compartments shall be 144 mm (5-11/16 in) for letters and 290 mm (11-7/16 in) for flats. Depth at rear of sloping sorting trough (sloped down 30 degrees front to back) in table top shall be 102 mm (4 in). A 25-mm (1-in) diameter hole shall be provided in all shelves. Hole shall be centered in each compartment and located 57 mm (2-1/4 in) from back of letter shelf and 152 mm (6 in) from back of flats shelf.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

10. Type 14 sorting table shall be provided with a removable, open-top mail receptacle with support shelf and a separate (shipped loose) flanged letter drop, suitable for bulkhead attachment. The mail receptacle shall be 254 mm (10 in) deep by 483 mm (19 in) high with top sloping down 76 mm (3 in) front to back. The letter drop shall be 152 mm (6 in) deep sloped down 60 degrees with a 152 mm (6 in) wide by 44 mm (1-3/4 in) high letter slot. Base lockers shall be 502 mm (19-3/4 in) wide by 610 mm (24 in) deep with three adjustable shelves in each locker.

11. Types 15 and 16 strip label and fly tag rack upper section shall be 387 mm (15-1/4 in) high with shelves spaced 114 mm (4-1/2 in) vertically and subdivided with partitions into an equal number of compartments spaced 27 mm (1-1/16 in) and 52 mm (2-1/16 in) horizontally. Lower section shall be fitted with 25-mm (1-in) deep by 13-mm (1/2-in) high CRES hooks spaced 140 mm (5-1/2 in) vertically and 82 mm (3-1/4 in) horizontally.

12. Types 17 and 18 safe drawer unit shall be provided with a combination lock Group 1R in accordance with UL 768 and internal locking bar assembly capable of vertically securing all drawers simultaneously. The small drawers of the type 17 and 18 units shall be interchangeable on board the ship where they are fitted. The following shall be stenciled in a conspicuous location on inside of drawer with combination lock:
    "WHEN USE OF THIS UNIT IS DISCONTINUED
    - LOCK DRAWER IN OPEN POSITION.
    - FASTEN PAPER ANNOTATED WITH PRESENT COMBINATION TO INSIDE OF DRAWER WITH TAPE.
    - CHANGE COMBINATION BEFORE REUSING."

    A removable five-section change tray and six-section bill tray shall be provided for both small drawers of the types 17 and 18 units. Five sections of the bill tray shall be fitted with a weighted bill retainer. An adjustable file compressor shall be provided for the two lower drawers in the type 18 unit. Types 17 and 18 units shall be constructed of steel.

13. Type 19 drawer/counter unit is for installation on top of a base unit or in a recess in a counter top for scales.

14. Type 20 cabinet unit shall be provided with two file drawers at the bottom of the unit and a sliding shelf that locks in the extended and closed position. Shelf shall be capable of supporting 45 kg (100 lbs) evenly distributed.

15. Label plate shall be located on inside upper right-hand corner of the back panel or in an inconspicuous location under the unit.

For guidance only: Typical post office arrangements are shown on drawing, NAVSEA No. 804-5959193, Typical Arrangements Post Office.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

TABLE I. Post Office Equipment size and weight

Type	Width mm (in)	Depth mm (in)	Height mm (in)	Weight kg (lb)
1	1067 (42)	298 (11-3/4)	292 (11-1/2)	8 (18)
2	330 (13)	229 (9)	508 (20)	16 (35)
3	1232 (48-1/2)	624 (24-9/16)	495 (19-1/2)	18 (40)
4	1829 (72)	914 (36)	1092 (43)	138 (305)
5	244 (96)	914 (36)	1092 (43)	154 (340)
6	711 (28)	178 (7)	102 (4)	2 (4)
7	1067 (42)	360 (14-5/32)	711 (28)	23 (50)
8	1524 (60)	360 (14-5/32)	711 (28)	32 (70)
9	1197 (47-1/8)	387 (15-1/4)	1918 (75-1/2)	36 (80)
10	1089 (42-7/8)	629 (24-3/4)	1854 (73)	40 (89)
11	1192 (46-15/16)	762 (30)	1854 (73)	48 (106)
12	1222 (48-1/8)	413 (16-1/4)	929 (36-9/16)	29 (65)
13	1222 (48-1/8)	413 (16-1/4)	929 (36-9/16)	30 (66)
14	1562 (61-1/2)	622 (24-1/2)	1041 (41)	53 (116)
15	306 (12-1/32)	140 (5-1/2)	851 (33-1/2)	3 (7)
16	630 (24-13/16)	140 (5-1/2)	851 (33-1/2)	9 (20)
17	457 (18)	610 (24)	329 (12-15/16)	56 (123)
18	457 (18)	610 (24)	940 (37)	111 (245)
19	508 (20)	622 (24-1/2)	329 (12-15/16)	16 (35)
20	914 (36)	610 (24)	1016 (40)	21 (46)

Notes:
1. Height and weight do not include subbase.
2. Height of type 6 does not include flanges.
3. Depth, height, and weight of types 10 and 11 include table top with sorting trough and legs.
4. Height of backsplashes & retainer rails shall be 127 mm (5 in) for 3, 4, 5, 7, and 8.
5. Type 3 height includes support frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

Custodians:
ARMY - AV
NAVY - SH
AIR FORCE - 99

Preparing activity:
NAVY - SH
(Project 2090-0109-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.