PERFORMANCE SPECIFICATION SHEET

LOCKERS, CLOTHING, OFFICER, TYPES 1 - 8

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the furnishings described herein shall consist of this specification sheet and performance specification, MIL-PRF-32038.

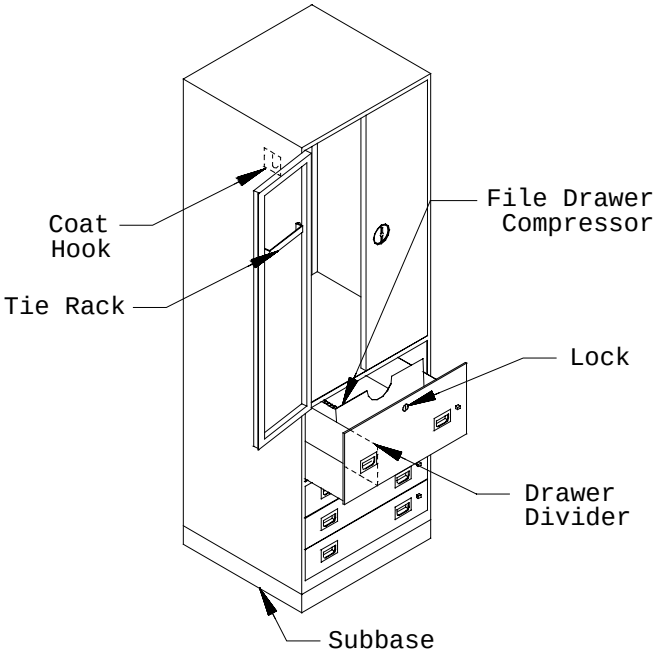

Type 1

Wardrobe & File

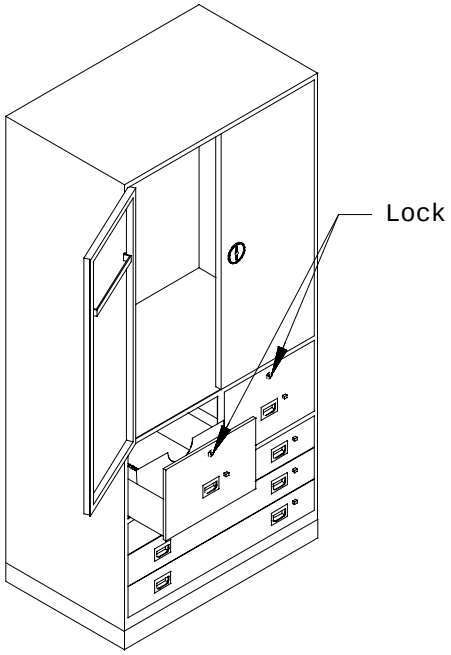

Type 2

Wardrobe & File

AMSC N/A FSC 2090

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

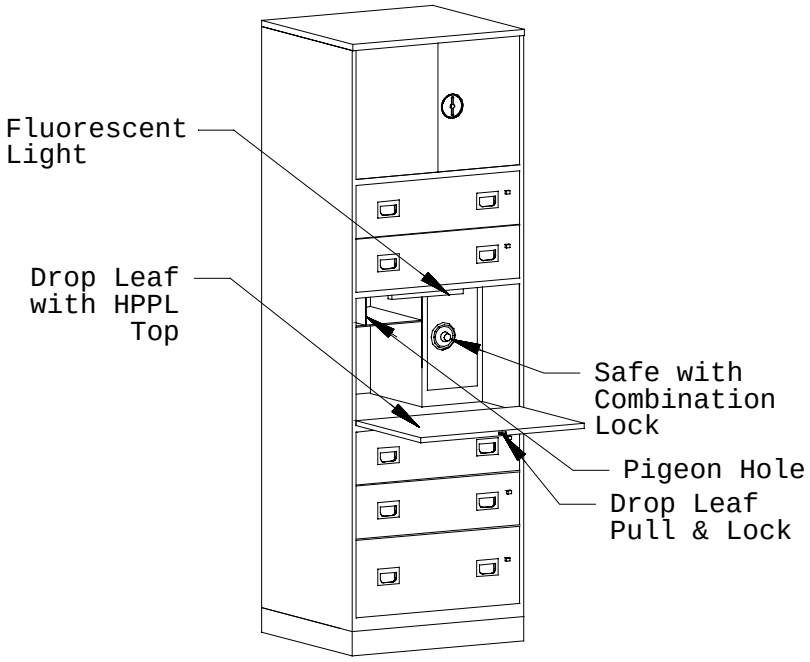

Type 3 & 4

Secretary Bureau

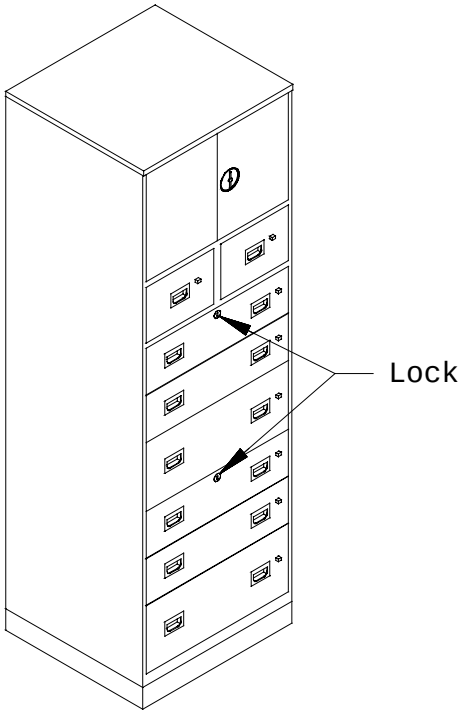

Types 5 & 6

Drawer Locker

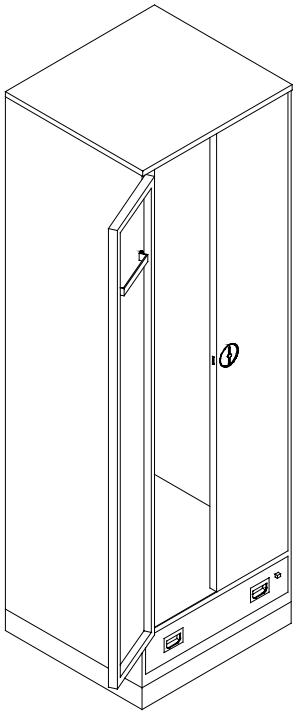

Types 7 & 8

Long Wardrobe

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Locker size and weight shall be in accordance with Table I.

2. Locker stowage capacities shall be in accordance with Table II.

3. Locker section of wardrobe & file, types 1 and 2, and long wardrobe, types 7 and 8, shall be provided with a full-width hanging rod, coat hanger and tie rack. The top of the hanging rod shall be 19 mm (3/4 in) from the inside top of the locker. The tie rack shall be 184 mm (7-1/4 in) wide for types 1 and 7 and 337 mm (13-1/4 in) wide for types 2 and 8.

4. Secretary bureau, types 3 and 4, shall be provided with an 8-watt fluorescent light, symbol 142.2, and ballast box. Center of light shall be located 165 mm (6-1/2 in) from face of locker. Ballast box shall be located above light. Light and ballast shall be wired with a three-conductor cable type 18/3 SVT – one conductor to be grounded to the light fixture. The cable shall pass through the center back of the secretary and a rubber insulating grommet shall be installed at this point. Cable shall extend 1.8 m (6 ft) beyond back of secretary bureau.

5. Top surface of the secretary bureau drop leaf shall be covered with high-pressure plastic laminate (HPPL) and shall be located 748 mm (29-7/16 in) above deck. Drop leaf in open position shall extend 346 mm (13-5/8 in) from face of locker.

6. Safe locker for secretary bureau shall be 216 mm (8-1/2 in) wide by 356 mm (14 in) high by 318 mm (12-1/2 in) deep and shall be provided with a combination lock Group 1R in accordance with UL 768. The following shall be stenciled on inside of safe door:
   “WHEN USE OF THIS UNIT IS DISCONTINUED
   - LOCK DOOR IN OPEN POSITION.
   - FASTEN PAPER ANNOTATED WITH PRESENT COMBINATION TO INSIDE OF DOOR WITH TAPE.
   - CHANGE COMBINATION BEFORE REUSING.”

7. Pigeon holes for types 3 & 4 secretary bureau shall be 102 mm (4 in) high and 318 mm (12-1/2 in) deep. Type 3 shall have one 102-mm (4-in) wide unit and one 222-mm (8-3/4-in) wide unit. Type 4 shall have three 127-mm (5-in) wide units and one 235-mm (9-1/4-in) wide unit.

8. Label plate shall be located on the inside upper right-hand corner of the back panel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

TABLE I. Locker size and weight

Type	Width mm (in)	Depth mm (in)	Height mm (in)	Weight kg (lb)
1	610 (24)	562 (22-1/8)	1829 (72)	59 (130)
2	914 (36)	562 (22-1/8)	1829 (72)	76 (167)
3	610 (24)	562 (22-1/8)	1829 (72)	72 (158)
4	914 (36)	562 (22-1/8)	1829 (72)	123 (271)
5	610 (24)	562 (22-1/8)	1829 (72)	73 (160)
6	914 (36)	562 (22-1/8)	1829 (72)	87 (192)
7	610 (24)	562 (22-1/8)	1829 (72)	35 (78)
8	914 (36)	562 (22-1/8)	1829 (72)	40 (89)

Note: Height and weight do not include subbase.

TABLE II. Locker stowage capacity

Type	Short Hanging (1) mm (in)	Long Hanging (2) mm (in)	Drawer Volume (3)	
			File cu m (cu ft)	Clothes cu m (cu ft)
1	610 (24)	-	0.04 (1.54)	0.08 (2.70)
2	914 (36)	-	0.06 (2.20)	0.12 (4.20)
3	-	-	-	0.21 (7.57)
4	-	-	-	0.33 (11.78)
5	-	-	-	0.42 (14.73)
6	-	-	-	0.51 (17.90)
7	-	610 (24)	-	0.03 (0.93)
8	-	914 (36)	-	0.04 (1.51)

Notes:
1. Short hanging shall be not less than 1041 mm (41 in) vertically.
2. Long hanging shall be not less than 1651 mm (65 in) vertically.
3. Volumes are total per locker unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

Custodians:
ARMY - AV
NAVY - SH
AIR FORCE - 99

Preparing activity:
NAVY - SH
(Project 2090-0109-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.