
PERFORMANCE SPECIFICATION SHEET

SHOWCASES, SHIP'S STORE, TYPES 1 - 5

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the furnishings described herein shall consist of this specification sheet and performance specification, MIL-PRF-32038.

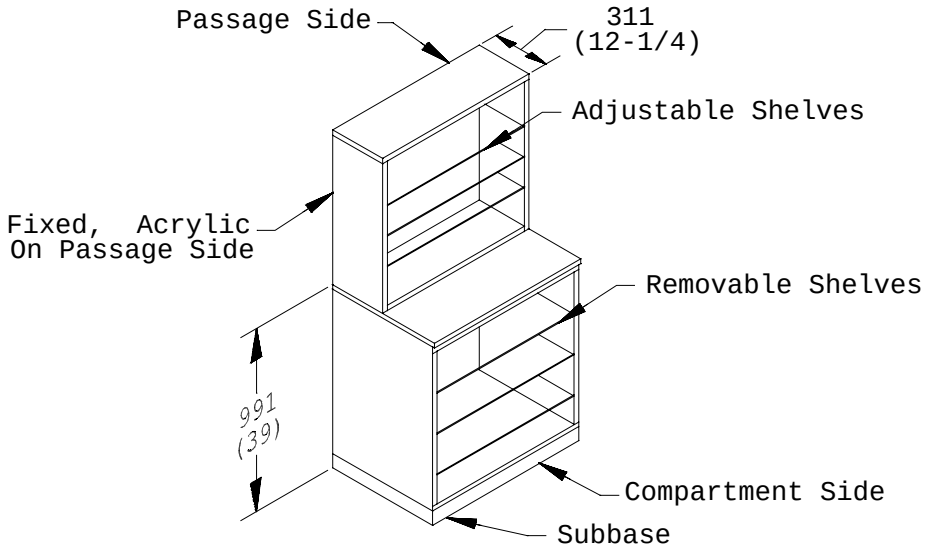


Type 1

Showcase

AMSC N/A FSC 2090


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

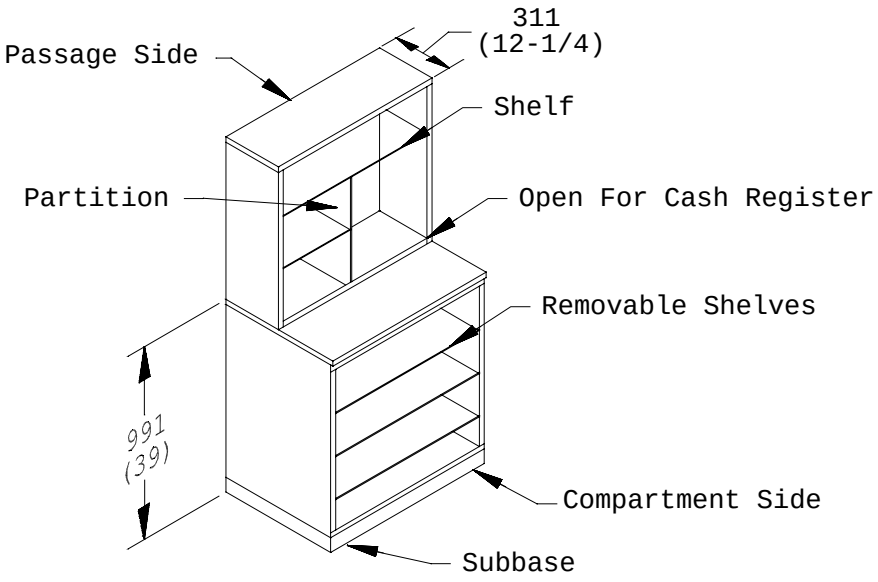

Type 2


Showcase

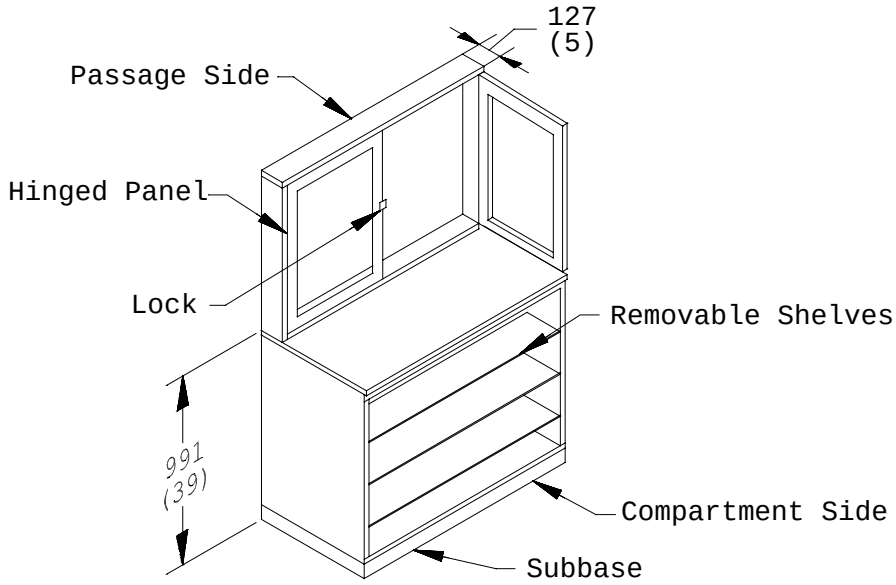

Type 3


Showcase

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

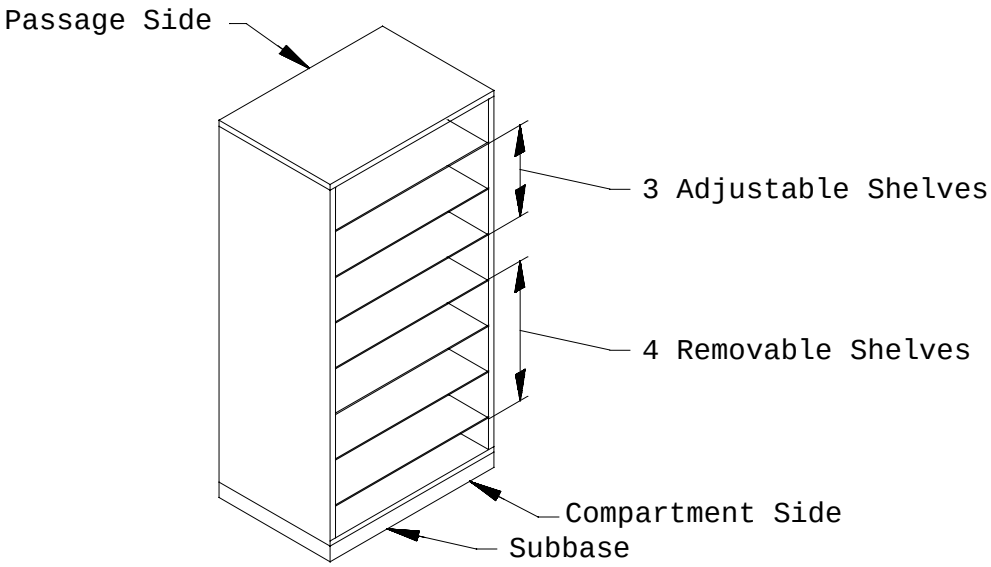

Type 4

Showcase

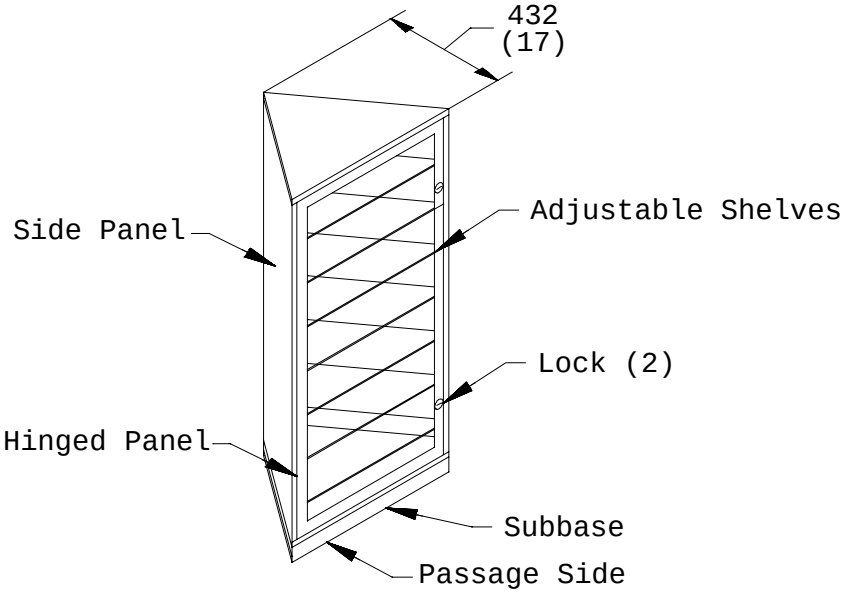

Type 5

Showcase

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Showcase size and weight shall be in accordance with Table I.
2. All shelves shall be made of acrylic plastic bonded in CRES.
3. The front of all types shall be made of acrylic plastic. Sides and top shall be solid metal. Working counter top surfaces shall be CRES.
4. All units shall be provided with a removable metal bottom panel.
5. Doors on the types 3 & 5 units shall be made of CRES frame with acrylic panel inserts. The door on the type 3 unit shall be lockable from inside the compartment and the locks on the type 5 unit from outside the compartment. Locks shall be similar or equal to Hurd No. 60 as supplied by Yale and Towne Manufacturing Co. of White Plains, New York.
6. Units shall be made for installing side by side.
7. All units shall be fitted with factory-installed, pre-wired fluorescent lighting fixtures, which serve to illuminate the products displayed on the shelves. All electrical components shall be in accordance with the ship's electrical specifications. Each unit's electrical components shall be self-contained and each unit's wiring shall terminate in a connection box. The installing activity shall furnish switches and supply cable to the connection box.
8. Label plate shall be located on the upper right inside corner of the bottom panel.

TABLE I. Showcase size and weight

Type	Width mm (in)	Depth mm (in)	Height mm (in)	Weight kg (lb)
1	610 (24)	914 (36)	1829 (72)	41 (90)
2	610 (24)	914 (36)	1829 (72)	41 (90)
3	610 (24)	1219 (48)	1829 (72)	54 (120)
4	610 (24)	914 (36)	1829 (72)	41 (90)
5	610 (24)	762 (30)	1829 (72)	34 (75)

Notes: 1. Height includes subbase.
2. Weight does not include subbase.

Custodians:
ARMY - AV
NAVY - SH
AIR FORCE - 99

Preparing activity:
NAVY - SH
(Project 2090-0109-18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:25Z
Check the source to verify that this is the current version before use.