MILITARY SPECIFICATION


# CABLE, ELECTRICAL, SHIELDED AND JACKETED, SPECIAL PURPOSE

This specification is approved for use within U.S. Army Missile Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers one type of 600-volt special purpose shielded and jacketed cable having a temperature rating of plus 135 degrees Celsius (C) plus 275 degrees Fahrenheit (F).

1.2 Military part number. The military part number shall consist of the letter M, the basic number of this specification, and numbers denoting number of component wires, component wire size, component wire(s) jacket color, and outer jacket color.

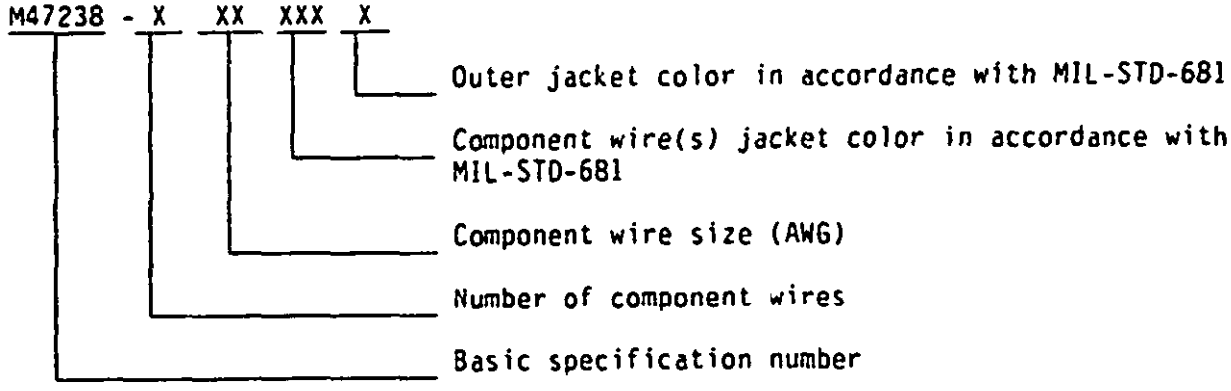


Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, AL 35898-5270, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6145

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:03Z
Check the source to verify that this is the current version before use.

## 2. APPLICABLE DOCUMENTS

### 2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

| | |
|---|---|
| O-E-760 | Ethyl Alcohol (Ethanol); Denatured Alcohol; and Proprietary Solvent |
| TT-I-735 | Isopropyl Alcohol |

MILITARY

| | |
|---|---|
| MIL-H-5606 | Hydraulic Fluid, Petroleum Base, Aircraft, Missile, and Ordinance |
| MIL-T-5624 | Turbine Fuel, Aviation, Grades JP-4 and JP-5 |
| MIL-L-7808 | Lubricating Oil, Aircraft Turbine Engine, Synthetic Base, NATO Code Number O-148 |
| MIL-C-12000 | Cable, Cord, and Wire, Electric; Packaging of |
| MIL-W-81044 | Wire, Electric, Crosslinked Polyalkene Crosslinked Alkaneimide Polymer, or Polyarylene Insulated Copper or Copper Alloy |
| MIL-W-81044/12 | Wire, Electric, Crosslinked Polyalkene Insulated, Tin-Coated Copper, Light Weight, 600-Volt, 150°C |

STANDARDS

FEDERAL

| | |
|---|---|
| FED-STD-228 | Cable and Wire, Insulated; Methods of Testing |

MILITARY

| | |
|---|---|
| MIL-STD-104 | Limits for Electrical Insulation Color |
| MIL-STD-129 | Marking for Shipment and Storage |
| MIL-STD-681 | Identification Coding and Application of Hookup and Lead Wires |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:03Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

| | |
|---|---|
| ASTM B33 | Standard Specification for Tinned Soft or Annealed Copper Wire for Electrical Purposes |

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3 and 6.2).

3.2 Material. The cable shall consist of one or more wire cores encased in a tin-coated copper shielding braid and covered by a radiation crosslinked polyvinylidene fluoride insulation jacket.

3.3 Construction.

3.3.1 Component wire. The component wire used for the cable core shall conform to MIL-W-81044/12.

3.3.2 Shield. The shield shall be in the form of a closely woven braid made from round, tin-coated, copper wire conforming to ASTM B33. The shield size shall conform to the American Wire Gage (AWG) as specified in Table I. The shield coverage shall be not less than 85 percent (see 4.5.2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:03Z
Check the source to verify that this is the current version before use.

3.3.3 Jacket. The jacket shall be made of virgin material, radiation crosslinked polyvinylidene fluoride as specified in MIL-W-81044. The thickness shall be as specified in Table I. The tensile strength of the jacket shall be not less than 4000 pounds per square inch (psi) and the elongation shall be not less than 200 percent (see 4.5.3 and 4.5.4).

3.3.4 Cable. The finished cable shall be in accordance with table I. The length of lay shall be 8 to 16 times the outside diameter of the cable core (see 4.5.6 and 4.5.7).

Table I. Cable measurements.

| Part Number | Conductor Size (AWG) | Shield Size (AWG) | Mimimum jacket thickness (in.) | Maximum outside diameter (in.) | Maximum weight (lb per 1000 ft) |
|---|---|---|---|---|---|
| M47238-12622 | 26 | 40 | 0.0045 | 0.065 | 4.1 |
| M47238-12699 | 26 | 40 | 0.0045 | 0.065 | 4.1 |
| M47238-12299 | 22 | 38 | 0.0045 | 0.083 | 7.1 |
| M47238-12099 | 20 | 38 | 0.0055 | 0.093 | 9.5 |
| M47238-11699 | 16 | 36 | 0.0055 | 0.115 | 17.0 |
| M47238-222099 | 22 | 36 | 0.0055 | 0.137 | 14.3 |
| M47238-220099 | 20 | 36 | 0.0055 | 0.153 | 19.2 |
| M47238-218099 | 18 | 36 | 0.0055 | 0.174 | 25.8 |
| M47238-216099 | 16 | 36 | 0.0055 | 0.188 | 30.9 |
| M47238-216269 | 16 | 36 | 0.0055 | 0.188 | 30.9 |
| M47238-214099 | 14 | 36 | 0.0055 | 0.219 | 44.0 |
| M47238-212099 | 12 | 36 | 0.0065 | 0.277 | 73.5 |
| M47238-3200929 | 20 | 36 | 0.0055 | 0.163 | 25.6 |

3.4 Finished cable properties.

3.4.1 Color. The color of the finished cable jacket shall be in accordance with MIL-STD-104, except that colors other than white shall be selected in accordance with and shall conform to MIL-STD-681 (see 4.5.8).

3.4.2 Insulation flaws. The finished cable shall withstand the application of 1500 volts root mean square (vrms) at a frequency of 60 hertz (Hz) without evidence of breakdown (see 4.5.9).

3.4.3 Blocking. Adjacent layers of cable shall not stick together after exposure to a temperature of plus 150 plus or minus 3 degrees C (plus 302 plus or minus 5 degrees F) (see 4.5.10).

3.4.4 Dielectric strength. The cable shall withstand the application of 2500 vrms at a frequency of between the 60 Hz for 1 minute without evidence of breakdown between the conductors (see 4.5.11).

3.4.5 Wet Dielectric strength. After immersion in a 5 percent salt solution for 1 hour, the cable shield shall withstand the application of 1000 vrms at a frequency of 60 Hz for 1 minute without evidence of breakdown (see 4.5.12).



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:03Z
Check the source to verify that this is the current version before use.

3.4.6 Low temperature flexibility. After exposure to a temperature of minus 65 plus or minus 2 degrees C (minus 85 plus or minus 5 degrees F), the cable shall not crack when bent 180 degrees over a mandrel of the diameter and with the load as specified in table II (see 4.5.13).

Table II. Cable test details.

| Part Number | Maximum madrel diameter (in.) for life cycle, accelerated aging, & low temperature flexibility test | Test load (lb) | |
|---|---|---|---|
| | | Flammability life cycle, & accelerated aging tests | Low temperature flexibility test |
| M47238-12622 | 1 3/4 | 0.13 | 0.75 |
| M47238-12699 | 1 3/4 | 0.13 | 0.75 |
| M47238-12299 | 2 1/4 | 0.19 | 1.50 |
| M47238-12099 | 2 1/2 | 0.19 | 1.50 |
| M47238-11699 | 3 | 0.25 | 1.50 |
| M47238-222099 | 3 1/2 | 0.38 | 3.00 |
| M47238-220099 | 4 | 0.38 | 3.00 |
| M47238-218099 | 4 1/2 | 0.50 | 3.00 |
| M47238-216099 | 5 | 0.50 | 3.00 |
| M47238-216269 | 5 | 0.50 | 3.00 |
| M47238-214099 | 6 | 1.00 | 9.00 |
| M47238-212099 | 7 | 1.00 | 9.00 |
| M47238-3200929 | 4 1/4 | 0.57 | 4.50 |

3.4.7 Flammability. When ignited, the cable shall burn not longer than 30 seconds and the flame shall travel upward not more than 3 inches. Burning particles or drippings falling onto tissue paper shall not cause the tissue paper to burst into flame (see 4.5.14).

3.4.8 Life cycle. After exposure to a temperature of 200 plus or minus 3 degrees C (392 plus or minus 5 degrees F) for 120 plus or minus 4 hours, while bent over a mandrel under tension, and allowed to cool to 23 plus or minus 3 degrees C (73 plus or minus 5 degrees F) within 1 hour, the cable shall be subjected to 2 bends in each direction around a mandrel without evidence of the insulation cracking. After immersion in a 5 percent salt solution for 1 hour at 23 plus or minus 3 degrees C (73 plus or minus 5 degrees F) and the application of a test potential of 1000 vrms for 1 minute, the cable shall show no evidence of dielectric breakdown or pitting (see 4.5.15).

3.4.9 Accelerated aging. After exposure to a temperature of 225 plus or minus 3 degrees C (437 plus or minus 5 degrees F) for 6 plus or minus 1 hours while bent over a mandrel under tension, and allowed to cool to 23 plus or minus 3 degrees C (73 plus or minus 5 degrees F) within 1 hour, the cable shall be subjected to 2 bends in each direction around a mandrel without evidence of the insulation cracking. After immersion in a 5 percent salt solution for 1 hour at 23 plus or minus 3 degrees C (73 plus or minus 5 degrees F) and the application of a test potential of 1000 vrms for 1 minute, the cable shall show no evidence of dielectric breakdown or pitting (see 4.5.16).



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:03Z
Check the source to verify that this is the current version before use.

3.4.10 Immersion resistance. After immersion in isopropyl alcohol conforming to TT-I-735, hydraulic fluid conforming to MIL-H-5606, jet fuel conforming to MIL-T-5624, grade JP-4, ethyl alcohol conforming to O-E-760, or lubricating oil conforming to MIL-L-7808 for 20 plus or minus 1 hours at 49 plus or minus 2 degrees C (120 plus or minus 4 degrees F) and dried for 1 hour plus or minus 6 minutes at ambient room temperature, the cable shall be subjected to bends in each direction around a mandrel without evidence of the insulation cracking. After immersion in a 5 percent salt solution for 1 hour at 25 plus or minus 3 degrees C (73 plus or minus 5 degrees F) and the application of a test potential of 1000 vrms for 1 minute, the cable shall show no evidence of dielectric breakdown (see 4.5.17).

3.4.11 Concentricity. The cable jacket concentricity shall be not less than 70 percent (see 4.5.18).

3.4.12 Cable designation. The identification of cables covered by this specification shall be a combination of numbers as shown in paragraph 1.2 (see 4.5.19).

3.5 Workmanship. The workmanship shall be such as to insure a product which is uniform and in conformance with the requirements of this specification. The cable shall be free of lumps, kinks, and abraded surfaces (see 4.5.19).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The inspections specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4).



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:03Z
Check the source to verify that this is the current version before use.

4.3 First article inspection. First article inspection shall be conducted only on the first article sample.

4.3.1 First article sample. The first article sample shall be prepared using the same methods proposed for the preparation of subsequent production lots of material.

4.3.2 Inspection routine. Sample units shall be subjected to all examinations and tests specified herein except as specified in the acquisition documents (see 6.2).

4.3.3 Failures. First article samples which do not meet all the requirements of this document shall be subject to rejection and return to the supplier.

4.4 Quality conformance inspection. Quality conformance inspections for acceptance of the cable shall consist of the following examinations and tests:

a. Cable diameter.

b. Cable weight.

c. Color.

d. Insulation flow.

e. Dielectric strength.

f. Wet dielectric strength.

g. Low temperature flexibility.

h. Flammability.

i. Accelerated aging.

j. Concentricity.

4.4.1 Lot size. Lot size shall consist of all the cable submitted for acceptance at the same time, which has been prepared by the same company without change in materials or processes in one continuous period of operation.

4.4.2 Sampling. Unless otherwise specified (see 6.2), not less than three 5-foot sample lengths of cable shall be selected at random from each lot for all quality conformance tests except for the dielectric strength test (see 4.3.11). Sampling for the dielectric strength test shall be 100 percent of production. Failure of the sample to pass the quality conformance tests shall be cause for lot rejection.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:03Z
Check the source to verify that this is the current version before use.

4.5 Test methods.

4.5.1 Examination of product. All cable shall be carefully examined to ascertain conformance to this specification with respect to all requirements not covered by specific test methods.

4.5.2 Shield coverage. The shield coverage shall be determined in accordance with the following formula:

$$\text{Percent coverage} = (2F - F^2)\ 100:$$

$$F = \frac{NPd}{\text{Sin } a} \quad ; \quad \text{Tan } a = \frac{2\pi(D + 2d)\ P}{C}$$

Where: N = number of strands per carrier
P = picks per inch
d = diameter of strand (inch)
a = angle of shield with cable axes (degrees)
D = effective diameter of cable under shield (inches)
C = number of carriers

The shield coverage shall be not less than 85 percent.

4.5.3 Jacket thickness. The outer jacket insulation thickness shall be determined in accordance with FED-STD-228, Method 1018. The jacket thickness shall be as specified in Table I.

4.5.4 Jacket tensile strength. The jacket tensile strength shall be tested in accordance with FED-STD-228, Method 3021. One inch bench marks and 1-inch jaw separation shall be used. Elongation shall be as specified in 3.3.3.

4.5.5 Jacket elongation. The jacket elongation shall be tested in accordance with FED-STD-228, Method 3031. One inch bench marks and 1-inch jaw separation shall be used. Elongation shall be as specified in 3.3.3.

4.5.6 Cable diameter. The outside diameter of the cable shall be accurately measured and shall be as specified in Table I.

4.5.7 Cable weight. A specimen of the cable not less than 10 feet long shall be accurately measured and weighed. The weight of the specimen shall be converted to equal pounds per 1000 feet. Weight of the cable shall be as specified in Table I.

4.5.8 Color. The outer jacket shall be visually examined. The color shall be as specified in 3.4.1.

4.5.9 Insulation flaws. The cable shall be passed through a suitable chain-electrode spark test, subjected to 1500 vrms at a frequency of 60 Hz. The electrode shall be a suitable bead chain of fine mesh construction to give



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:03Z
Check the source to verify that this is the current version before use.

intimate metallic contact with maximum insulation surface. Electrode length and speed of wire movement shall be such that the insulation is subjected to the test voltage for not less than 0.2 second. The cable shall show no evidence of breakdown.

4.5.10 Blocking. A shipping length of cable shall be wound onto a suitable reel or spool and subjected to a temperature of 150 plus or minus 3 degrees C (302 plus or minus 5 degrees F). Adjacent cable surfaces shall not stick together.

4.5.11 Dielectric strength. The cable shall be tested for dielectric strength by applying 2500 vrms at a frequency of 60 Hz between each conductor of a multiconductor cable and all other conductors electrically connected, and to the shield braid. The voltage shall be maintained for not less than 1 minute during each application. The cable shall show no evidence of breakdown.

4.5.12 Wet dielectric strength. The cable test specimen shall be 24 inches long. The specimen shall be prepared for wet dielectric strength testing by removing 1-3/4 inches of outer jacket from each end of the cable specimen without damaging the insulation or basic wire(s). One inch of insulation shall be removed from each end of each basic wire. The individual basic wires and shield shall be fanned to separate them from each other where they extend beyond the cable jacket and the conductors of the basic wires and shield shall be connected together with a copper wire at each end of the specimen. The specimen shall then be bent into a "U" shape with the diameter of the bend not less than the specified mandrel diameter (see Table III). Each specimen shall be immersed in a 5 percent salt solution at a temperature of 23 plus or minus 3 degrees C (72 plus or minus 5 degrees F) with the specimen jacket protruding 3 inches above the surface of the liquid. After immersion for 1 hour, 1000 vrms at a frequency of 60 cps shall be applied between the conductors connected with the shield to an electrode in contact with the solution. The potential shall be increased at a uniform rate from zero to 1000 vrms with 1/2 minute and maintained at 1000 vrms for a period of 1 minute. The cable shall show no evidence of breakdown.

Table III. Wet dielectric test mandrel diameters.

| Cable diameter (in.) | Mandrel diameter (in.) |
|---|---|
| 0.125 (maximum) | 3 |
| 0.126 to 0.250 | 6 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:03Z
Check the source to verify that this is the current version before use.

4.5.13 Low temperature flexibility. One end of a previously untested cable specimen of suitable length shall be secured to a rotatable mandrel in a cold chamber, and the other end secured to a load weight. Mandrel diameter and load weight shall be as specified in Table II. Provisions shall be made for rotating the mandrel by a handle or control located outside the chamber. The specimen and mandrel shall be conditioned a minus 65 plus or minus 2 degrees C (minus 85 plus or minus 4 degrees F) for 4 hours plus or minus 15 minutes. Immediately after temperature conditioning, while the specimen and mandrel are still at a low temperature, the specimen shall be wrapped 180 degrees around the mandrel without opening the chamber. The bending shall be accomplished at a uniform 2 revolutions per minute (rpm). The specimen shall be removed from the mandrel as a helical coil and visually examined for cracks in outer jacket insulation without the aid of magnification. After the visual examination, 1 inch of insulation shall be removed from each end of the cable and the specimen subjected to wet dielectric strength test (see 4.4.12) with the bent portion submerged. The cable shall show no evidence of cracking or breakdown.

4.5.14 Flammability. The flammability test shall be performed in accordance with the flammability test specified in MIL-W-81044 with the test load as specified in Table II. The cable shall conform to the requirements of 3.4.7.

4.5.15 Life cycle. The life cycle test shall be performed in accordance with the life cycle test specified in MIL-W-81044. The mandrel diameter and test load shall be as specified in Table II. The oven temperature shall be maintained at 200 plus or minus 3 degrees C (392 plus or minus 5 degrees F). The cable shall conform to the requirements of 3.4.8.

4.5.16 Accelerated aging. The accelerated aging test shall be performed in accordance with the accelerated aging test specified in MIL-W-81044, except the inclusion of identification marking and examination for legibility of product identification on the sample is not applicable. The mandrel diameter and test load shall be as specified in Table II. The oven temperature shall be maintained at 225 plus or minus 3 degrees C (437 plus or minus 5 degrees F). The cable shall conform to the requirements of 3.4.9.

4.5.17 Immersion resistance. The immersion resistance test shall be performed in accordance with the immersion test specified in MIL-W-81044, except the use of hydraulic fluid, "Skydrol 500A", and the abrasion test after immersion are not applicable. During immersion test, the radius of bend of the cable shall be not less than 14 times the cable diameter as specified in Table I. The cable shall conform to the requirements of 3.4.10.

4.5.18 Concentricity. Concentricity shall be determined as the ratio of the minimum wall thickness to the maximum wall thickness of a cross section of the cable insulation and shall be expressed as percent concentricity. The wall thickness shall be the distance between the outer rim of the cable jacket and the outermost rim of cable shielding. All thickness measurements shall be made under suitable magnification. The cable jacket concentricity shall conform to the requirements of 3.4.11.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:03Z
Check the source to verify that this is the current version before use.

4.5.19 Cable designation and workmanship. The cable shall be visually inspected for compliance with paragraphs 3.4.12 and 3.5.

4.6 Preservation, packaging, packing, and marking. The preservation, packaging, packing, and marking shall be examined to determine compliance with Section 5.

5. PACKAGING

5.1 Preservation, packaging, packing, and marking. Unless otherwise specified (see 6.2), preservation, packaging, packing, and marking shall be as specified herein.

5.1.1 Preservation and packaging. Preservation and packaging shall be level A, level B or level C as specified in MIL-C-12000 and as follows:

5.1.1.1 Cable packaging. The cable shall be packaged on reels or on spools, each having an appropriate diameter for the respective size. In no case shall the eye of the coil, the barrel, the reel, or spool be less than 14 times the diameter of the finished cable.

5.1.1.2 Length. Unless otherwise specified (see 6.2), the cable shall be supplied in lengths not less than 100 feet.

5.1.2 Packing. Packing shall be level A, level B or level C as specified in MIL-C-12000.

5.1.3 Marking. Shipping containers shall be marked in accordance with MIL-STD-129 and shall include at least the following information:

a. Cable designation (see 3.4.12).

b. Manufacturer's identification.

c. Quantity.

d. Date of manufacture.

6. NOTES

6.1 Intended use. The cable covered by this specification is intended for special purpose electrical hookup of electrical and electronic equipments where operation at temperatures of not more than 135 degrees C (275 degrees F) may be required.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Length if other than specified (see 5.1.1.2).

c. Whether a first article sample is required and, if so, pertinent details (see 4.3).



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:03Z
Check the source to verify that this is the current version before use.

d. Sampling plan if other than specified (see 4.4.2).

e. Identifying part number.

f. Requirements for preservation, packaging, packing, and marking, if other than specified (see 5.1).

g. Applicable level(s) of preservation and packaging (see 5.1.1) and packing (see 5.1.2).

6.3 Subject term (key word) listing.

Cable, electrical

Cable, shielded and jacketed

Cable, special purpose

6.4 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-MI

User Activity:
Army-AR

Preparing Activity:
Army-MI

Project No. 6145-A047



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:03Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-C-4723&A(MI) | Cable, Electrical, Shielded and Jacketed, Special Purpose |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR<br>☐ USER<br>☐ MANUFACTURER<br>☐ OTHER *(Specify)*: _____ |
| b. ADDRESS *(Street, City, State, ZIP Code)* | |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:03Z
Check the source to verify that this is the current version before use.