
FED. SUP CLASS
5310

REVIEWER: MI, AT, ME, AV, GL, 85, IS, NSA
USER: SH, MC

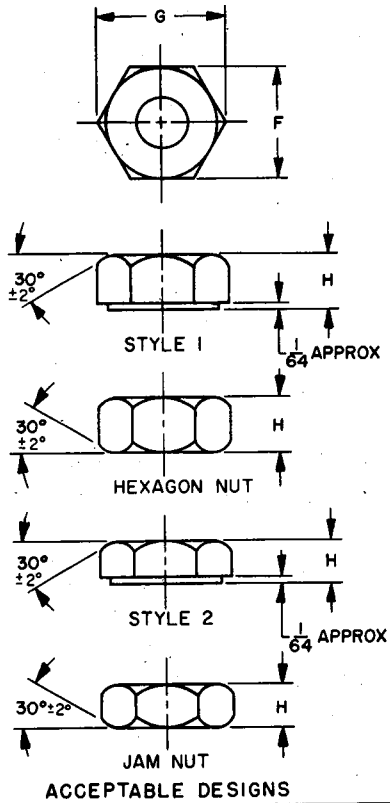

ACCEPTABLE DESIGNS

NOMINAL SIZE	WIDTH ACROSS FLATS F		WIDTH ACROSS CORNERS G		THICKNESS STYLE 1 NUTS H		THICKNESS STYLE 2 NUTS H	
	MAXIMUM	MINIMUM	MAXIMUM	MINIMUM	MAXIMUM	MINIMUM	MAXIMUM	MINIMUM
1/4	0.437	0.428	0.505	0.488	0.226	0.212	0.163	0.150
5/16	.500	.489	.577	.557	.273	.258	.195	.180
3/8	.562	.551	.650	.628	.337	.320	.227	.210
7/16	.687	.675	.794	.768	.385	.365	.260	.240
1/2	.750	.736	.866	.840	.448	.427	.323	.302
5/8	.937	.922	1.083	1.051	.559	.535	.387	.363
3/4	1.125	1.088	1.299	1.240	.665	.617	.446	.398
7/8	1.312	1.269	1.516	1.447	.776	.724	.510	.458
1	1.500	1.450	1.732	1.653	.887	.831	.575	.519
1-1/8	1.687	1.631	1.949	1.859	.999	.939	.639	.579
1-1/4	1.875	1.812	2.165	2.066	1.094	1.030	.751	.687
1-1/2	2.250	2.175	2.598	2.480	1.317	1.245	.880	.808

APPROVED 8 MAY 1957 REVISED (A) 8 MARCH 1963 (B) 8 MARCH 1967 (C) 29 JAN 1969

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

PROJECT 5310-0528 (C) ENTIRE STANDARD REVISED (C) FOR CHANGES SEE SHEET 1

P.A. WC / Other Cust 82	TITLE: NUT, PLAIN, HEXAGON, AND HEXAGON JAM, UNC-2B, NONMAGNETIC	MILITARY STANDARD MS16203
PROCUREMENT SPECIFICATION FF-N-836	SUPERSEDES:	SHEET 1 OF 2

DD FORM SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:54Z
Check the source to verify that this is the current version before use.

REVIEWER: MI, AT, ME, AV, GL, 85, IS, NSA
USER: SH, MC

NOMINAL SIZE	COPPER-SILICON ALLOY				ALUMINUM ALLOY				PHOSPHOR BRONZE			
	STYLE 1		STYLE 2		STYLE 1		STYLE 2		STYLE 1		STYLE 2	
	DASH NO.		DASH NO.		DASH NO.		DASH NO.		DASH NO.		DASH NO.	
1/4	25		37		49		56		63		75	
5/16	26		38		50		57		64		76	
3/8	27		39		51		58		65		77	
7/16	28		40		52		59		66		78	
1/2	29		41		53		60		67		79	
5/8	30		42		54		61		68		80	
3/4	31		43		55		62		69		81	
7/8	32		44		--		--		70		82	
1	33		45		--		--		71		83	
1-1/8	34		46		--		--		72		84	
1-1/4	35		47		--		--		73		85	
1-1/2	36		48		--		--		74		86	

-1 thru -24 nuts are cancelled by this revision. For interchangeability information see MS35691 and MS51971.

NOTES:

1. MATERIALS: Copper-silicon alloy in accordance with QQ-C-591, copper alloy no. 651.
   Aluminum alloy in accordance with temper T6 of QQ-A-225/8.
   Phosphor bronze in accordance with composition A of QQ-B-750.
2. THREADS: Threads shall be UNC-2B in accordance with Handbook H28.
3. DIMENSIONS: All dimensions are in inches, unless otherwise specified.
4. PROTECTIVE COATING: Aluminum alloy nuts shall be anodized.
5. Referenced documents shall be of the issue in effect on date of invitation for bids.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

APPROVED 8 MAY 1957 REVISED (A) 8 MARCH 1963 (B) 8 MARCH 1967 (C) FOR CHANGES SEE SHEET 1.

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust 82	TITLE NUT, PLAIN, HEXAGON, AND HEXAGON JAM, UNC-2B, NONMAGNETIC	MILITARY STANDARD MS16203
PROCUREMENT SPECIFICATION FF-N-836	SUPERSEDES:	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:54Z
Check the source to verify that this is the current version before use.