
This standard has been approved by the Naval Ship Engineering Center, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP. CLASS 5310

CANCELLED 17 OCTOBER 1968 · USE MS 35649
THIS CANCELLATION APPLIES TO ALL PAGES OF THIS STANDARD.

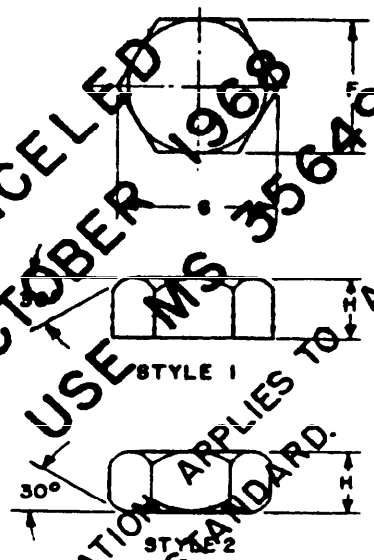

Nominal size	Width across flats (F)		Width across corners (G)		Thickness (H) Styles 1 and 2	
	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum
2	0.187	0.180	0.270	0.205	0.066	0.057
4	.250	.241	.289	.275	.098	.087
6	.312	.302	.361	.344	.114	.102
8	.343	.332	.397	.378	.130	.117
10	.375	.362	.433	.413	.130	.117
1/4	.437	.423	.505	.482	.193	.178
5/16	.562	.543	.650	.621	.225	.208
3/8	.625	.607	.722	.692	.257	.239

(B)

(Project 5310-N028Sh) (A) For changes see sheets 1 and 2

APPROVED 8 MAY 1957 REVISED (A) 19 AUGUST 1966 (B) 17 OCTOBER 1968

CUSTODIANS	OTHER INT.
Ships	A -
	N -
	AF -

MILITARY STANDARD

NUTS, PLAIN, HEXAGON, MACHINE SCREW, UNC-2B, NONMAGNETIC

MS 16210 (SHIPS)

Procurement Specification (A) FF-N-836

SUPERSEDES:

SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:54Z
Check the source to verify that this is the current version before use.