
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP. CLASS
5305

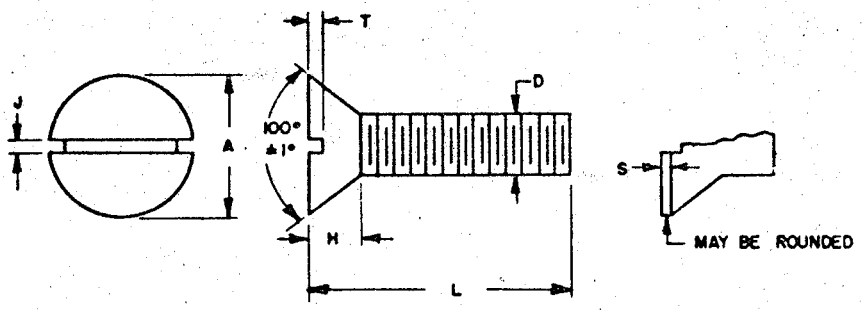

Nominal size	D		4(0.112)		6(0.138)		8(0.164)		10(0.190)		1/4	
Threads per inch			40-NC		32-NC		32-NC		32-NF		20-UNC	
Head diameter	A	Max. sharp	0.225		0.279		0.332		0.385		0.507	
		Min. sharp	.207		.257		.308		.359		.477	
		Abs. min.	.200		.249		.300		.348		.462	
Flat on min. screw	S		.003		.004		.004		.005		.006	
Height of head	H	Max.	.048		.060		.072		.083		.110	
		Min.	.040		.051		.062		.072		.097	
Width of slot	J	Max.	.039		.048		.054		.060		.075	
		Min.	.031		.039		.045		.050		.064	
Depth of slot	T	Max.	.024		.030		.036		.042		.055	
		Min.	.017		.022		.027		.031		.042	
Length	L	Tolerance	Dash No.	FIIN	Dash No.	FIIN	Dash No.	FIIN	Dash No.	FIIN	Dash No.	FIIN
1/2		+0 -1/32	1		5		10		15		20	
3/4			2		6		11		16		21	
1							12		17		22	

Material: The material shall be nylon in accordance with type I of Specification MIL-P-17091.

Threads: The threads shall be in accordance with Handbook H28.

Length of thread: The complete threads shall extend to within two threads of the bearing surface of the head or closer if practicable.

Eccentricity: Heads of screws shall not be eccentric with the body beyond a tolerance of 3 percent of the maximum head diameter.

Radius of the fillet under the head: Radius of fillet under the head shall not exceed two times the pitch of the thread.

Dimensions: All dimensions are given in inches.

(1) Referenced documents shall be the issue in effect on date of invitation for bids.

(2) In case of conflict with any referenced document, this standard will govern.

(3) The MS part number consists of the MS sheet number, plus the dash number. Example: MS16268-22

CANCELLED
4 OCTOBER 1963

APPROVED 5 SEPT 1957 (A) 4 October 1963

(Project 5305-N006Sh)

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS16268
Ships	A - N - AF -	SCREWS, MACHINE, 100° FLAT COUNTERSUNK HEAD, SLOTTED, NYLON, CLASS 2A	(SHIPS)
PROCUREMENT SPECIFICATION None		SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1
1 OCT 52

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:55Z
Check the source to verify that this is the current version before use.