INCH-POUND
MS16842F
9 March 2011
SUPERSEDING
MS16842E
18 July 1984


DETAIL SPECIFICATION SHEET

CLAMP, WIRE ROPE, SADDLED, SINGLE-GRIP, STEEL, TYPE I (MALLEABLE-IRON AND STEEL SADDLE)

Reactivated after 9 March 2011 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and FF-C-450.

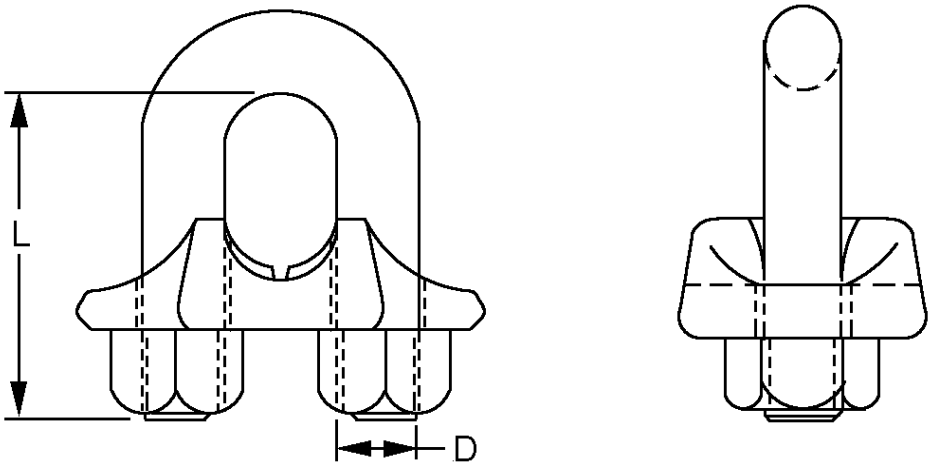

Type I, Class 1

FIGURE 1. Clamp, single grip saddled wire rope, carbon steel saddle – type I, class 1.

AMSC N/A

FSC 4030

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:00Z
Check the source to verify that this is the current version before use.

Clamp dimensions and number of carbon steel clamps used.


Dash Number	Wire rope diameter	D Thread minimum	U-Bolt length minimum L	Weight pounds minimum	Recommended number of clamps for each connection
1	1/8 (.125)	12-24 .2160 - 24UNC	.72	.05	2
2	3/16 (.188)	1/4-20 .2500 - 20UNC	.94	.09	2
3	1/4 (.250)	5/16-18 .3125 -18UNC	1.03	.18	2
4	5/16 (.313)	3/8-16 .3750 -16UNC	1.31	.25	2
5	3/8 (.375)	7/16-14 .4375 -14UNC	1.50	.42	2
6	7/16 (.438)	1/2-13 .5000 -13UNC	1.88	.70	2
7	1/2 (.500)	1/2-13 .5000 -13UNC	1.88	.73	3
23	9/16 (.563)	9/16-12 .5625 -12UNC	2.25	.80	3
8	5/8 (.625)	9/16-12 .5625 -12UNC	2.25	.90	3
9	3/4 (.750)	5/8-11 .6250 -11UNC	2.75	1.50	4
10	7/8 (.875)	3/4-10 .7500 -10UNC	3.12	2.00	4
11	1 (1.00)	3/4-10 .7500 -10UNC	3.50	2.50	5
12	1-1/8 (1.125)	3/4-10 .7500 -10UNC	3.88	3.10	6
13	1-1/4 (1.250)	7/8-9 .8750 - 9UNC	4.25	4.00	7
16	1-3/8 (1.375)	7/8-9 .8750 - 9UNC	4.44	5.20	7
14	1-1/2 (1.500)	7/8-9 .8750 - 9UNC	4.94	5.60	8
17	1-5/8 (1.625)	1-8 1.000 - 8UNC	5.31	7.30	8
15	1-3/4 (1.750)	1-1/8-7 1.125 - 7UNC	5.75	9.80	8
18	2 (2.000)	1-1/4-7 1.250 - 7UNC	6.44	13.40	8
19	2-1/4 (2.250)	1-1/4-7 1.250 - 7UNC	7.125	15.70	8
20	2-1/2 (2.500)	1-1/4-7 1.250 - 7UNC	7.688	17.90	9
21	2-3/4 (2.750)	1-1/4-7 1.250 - 7UNC	8.313	22.00	10
22	3 (3.000)	1-1/2-6 1.500 - 6UNC	9.188	32.00	10
23	3-1/2 (3.500)	1-1/2-6 1.500 - 6UNC	10.750	40.00	12

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.125	3.18	.563	14.30	1.030	26.16	1.750	44.45	3.120	79.25	5.75	146.05
.188	4.78	.625	15.88	1.125	28.58	1.880	47.75	3.500	88.90	6.44	163.58
.250	6.35	.720	18.29	1.250	31.75	2.000	50.80	3.88	98.55	7.125	180.98
.313	7.95	.750	19.05	1.310	33.27	2.250	57.15	4.25	107.95	7.688	195.28
.375	9.53	.875	22.23	1.375	34.93	2.380	60.45	4.62	117.35	8.313	211.15
.438	11.13	.940	23.88	1.500	38.10	2.750	69.85	4.94	125.48	9.188	233.38
.500	12.70	1.000	25.40	1.625	41.28	3.000	76.20	5.31	134.87		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. All dimensions are “reference” dimensions.

FIGURE 1. Clamp, single grip saddled wire rope, carbon steel saddle – type I, class 1 – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:00Z
Check the source to verify that this is the current version before use.

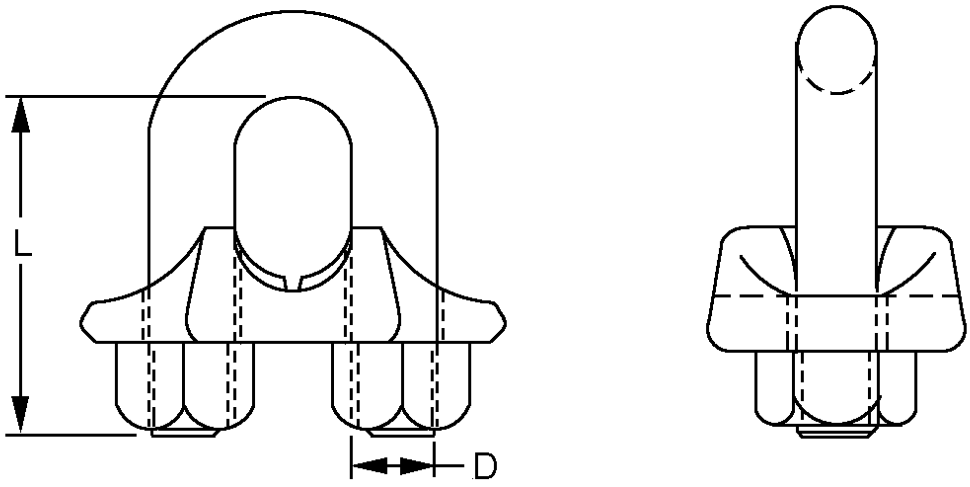

Type I, Class 2

FIGURE 2. Clamp, single grip saddled wire rope, malleable iron saddle – type I, class 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:00Z
Check the source to verify that this is the current version before use.

Clamp dimensions and number of malleable iron clamps used.

Dash number	Wire rope diameter	D Thread minimum	U-Bolt length minimum L	Weight pounds minimum	Recommended number of clamps for each connection
201	3/16 (.188)	10-24 .1900 - 24UNC	0.875	.06	2
202	1/4 (.250)	5/16-18 .3125 -18UNC	1.188	.13	2
203	5/16 (.313)	5/16-18 .3125 -18UNC	1.188	.15	2
204	3/8 (.375)	3/8-16 .3750 -16UNC	1.563	.21	2
205	7/16 (.438)	3/8-16 .3750 -16UNC	1.625	.24	2
206	1/2 (.500)	7/16-14 .4375 -14UNC	2.000	.37	3
207	9/16 (.563)	1/2-13 .5000 -13UNC	2.125	.54	3
208	5/8 (.625)	1/2-13 .5000 -13UNC	2.313	.59	3
209	3/4 (.750)	9/16-12 .5625 -12UNC	2.563	.83	4
210	7/8 (.875)	5/8-11 .6250 -11UNC	3.063	1.25	4
211	1 (1.00)	5/8-11 .6250 -11UNC	3.375	1.50	5
212	1-1/8 (1.125)	3/4-10 .7500 -10UNC	3.875	2.42	6
213	1-1/4 (1.250)	3/4-10 .7500 -10UNC	3.875	2.60	6
214	1-1/2 (1.500)	7/8-9 .8750 - 9UNC	4.500	5.00	7

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.188	4.78	.500	12.70	1.000	25.40	1.563	39.70	2.563	65.10
.250	6.35	.563	14.30	1.125	28.58	1.625	41.28	3.063	77.80
.313	7.95	.625	15.88	1.188	30.18	2.000	50.80	3.375	85.73
.375	9.53	.750	19.05	1.250	31.75	2.125	53.98	3.875	98.55
.438	11.13	.875	22.23	1.500	38.10	2.313	58.75	4.500	114.30

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. All dimensions are “reference” dimensions.

FIGURE 2. Clamp, single grip saddled wire rope, malleable iron saddle – type I, class 2 – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Clamps shall be in accordance with figures 1 and 2.

Material:

Type I, Class 1: Saddles, bolts, and nuts carbon steel shall be in accordance with Type I, Class I of procurement specification FF-C-450.
Type I, Class 2: Bolts, and nuts carbon steel and saddles malleable– iron shall be in accordance with Type I, Class 2 of procurement specification FF-C-450.

Protective coating shall be, mechanically deposited zinc coating in accordance with ASTM-B695, Type II, Class II, zinc coated (hot dip galvanized) in accordance with ASTM-A153/A153M or zinc coating (electrodeposited) in accordance with ASTM B633, Fe/Zn 5, type VI.

Threads shall be in accordance with procurement specification.


Marking shall be in accordance with procurement specification.

For design feature purposes, this standard takes precedence over acquisition documents referenced herein.

In the event of a conflict between the text of this specification sheet and the references cited herein, the text of this specification sheet shall take precedence.

Part or Identifying Number (PIN).

Example of a PIN: MS16842-1.

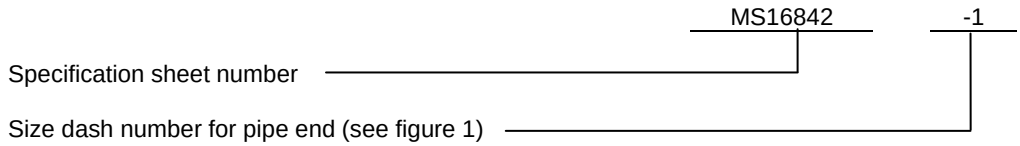

For interchangeable PIN's see table I.

TABLE I. Interchangeability PIN's.

Use	Cancelled	Use	Cancelled	Use	Cancelled
MS16842-1	MS16842-101	MS16842-6	MS16842-106	MS16842-11	MS16842-111
MS16842-2	MS16842-102	MS16842-7	MS16842-107	MS16842-12	MS16842-112
MS16842-3	MS16842-103	MS16842-8	MS16842-108	MS16842-13	MS16842-113
MS16842-4	MS16842-104	MS16842-9	MS16842-109	MS16842-14	MS16842-114
MS16842-5	MS16842-105	MS16842-10	MS16842-110	MS16842-15	MS16842-115

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to FF-C-450 this document references the following:

ASTM-A153/A153M
ASTM-B633
ASTM-B695

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:00Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – AR
Navy – SH
Air Force – 99
DLA-CC

Preparing activity:
DLA – CC

(Project 4030-2010-002)

Review activities:
Army – AT, AV, CR4, GL
Navy – MC, SA, YD
Air Force – 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:00Z
Check the source to verify that this is the current version before use.