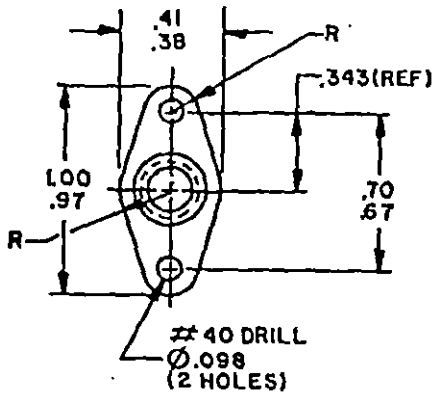
FED. SUP CLASS
5310



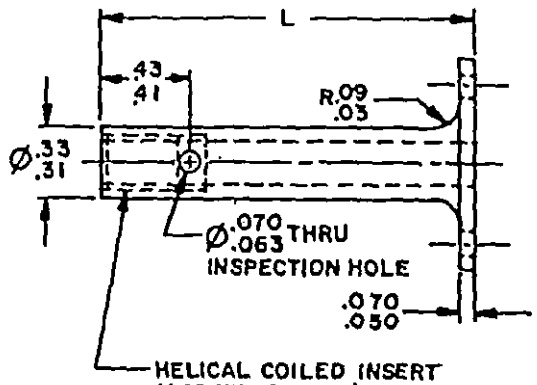


TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NO.	THREAD SIZE HELICAL COILED INSERT
-04	.1120-40 UNJC-2B
-06	.1380-32 UNJC-2B
-08	.1640-32 UNJC-2B
-3	.1900-32 UNJF-2B

TABLE II. LENGTH - SECOND DASH NO.

DASH NO.	L ±.020	DASH NO.	L ±.020	DASH NO.	L ±.020
-5	.50 1/	-13	1.30	-21	2.10
-6	.60	-14	1.40	-22	2.20
-7	.70	-15	1.50	-23	2.30
-8	.80	-16	1.60	-24	2.40
-9	.90	-17	1.70	-25	2.50
-10	1.00	-18	1.80		
-11	1.10	-19	1.90		
-12	1.20	-20	2.00		

1/ NO INSPECTION HOLE REQUIRED

APPROVED 2 MAR 87 REVISED

P.A. AIR FORCE-99 Other Cust ARMY-AV NAVY-AS	INTERNATIONAL INTEREST	TITLE NUT, SELF-LOCKING, PLATE, SPACER, LIGHT TO MEDIUM DUTY	MILITARY STANDARD MS21448
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES:		PAGE 1 OF 2

USER ACTIVITIES: ARMY-AT, ER, ME, MI

REVIEWER ACTIVITIES: AIR FORCE-11 AIR FORCE-82 DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

ISC N/A

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310-1469

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


1. MATERIAL: ALUMINUM ALLOY IMPACTS 6061-T6 (UNS A96061) IN ACCORDANCE WITH MIL-A-12545.

2. PROTECTIVE COATING: ANODIZE IN ACCORDANCE WITH MIL-A-8625, TYPE I, CLASS 1, OR CHEMICALLY TREAT PER MIL-C-5541 TO PRODUCE A COLOR INSPECTABLE FILM.

3. VIBRATION REQUIREMENTS IN ACCORDANCE WITH MIL-I-8846.

4. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS SHEET NUMBER, FOLLOWED BY THE FIRST DASH NUMBER TAKEN FROM TABLE I AND FOLLOWED BY A SECOND DASH NUMBER TAKEN FROM TABLE II.

EXAMPLE: MS21448-04-5



MS21448-04-5 - INDICATES NUT, SELF-LOCKING, PLATE, SPACER, THREAD SIZE; .1120-40 UNJC-2B, LENGTH; .50.

NOTES:

1. ALL DIMENSIONS IN INCHES.

2. THE HELICAL INSERT AND SPACER PLATE SHALL FORM ONE INTEGRAL UNIT.

3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

5. NO QPL SHALL BE ESTABLISHED.

USER ACTIVITIES:
ARMY-AT,ER,ME,MI

REVIEWER ACTIVITIES:
AIR FORCE-11
AIR FORCE-82
DLA

APPROVED 2 MAR 87 REVISED

P.A. AIR FORCE-99 Other Civil ARMY-AV NAVY-AS	INTERNATIONAL INTEREST	TITLE NUT, SELF-LOCKING, PLATE, SPACER, LIGHT TO MEDIUM DUTY	MILITARY STANDARD MS21448
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES:		PAGE 2 OF 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all core engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:40Z
Check the source to verify that this is the current version before use.