



FED. SUP CLASS
6140



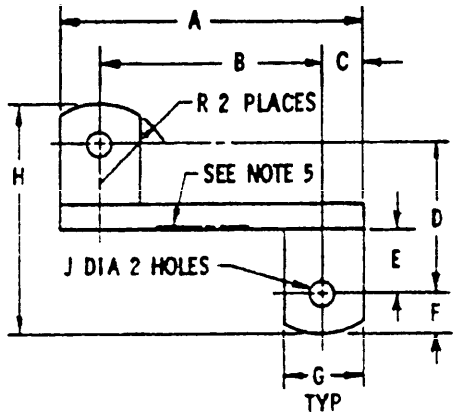

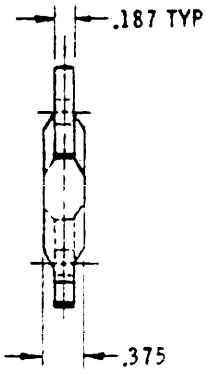

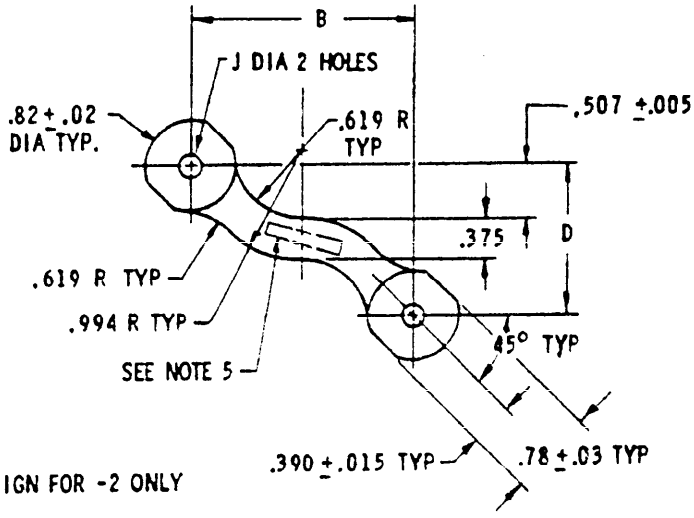

ALTERNATE DESIGN FOR -2 ONLY

DASH NO.	A	B	C	D	E	F	G ±.031	H ±.015	J ±.005	K	L	M	R (rad) ±.031
-1	2.125	1.625	.250	1.080	.478	.312	.500	1.704	.178	.125	.250	.062	.750
-2	2.790	2.040	.375	1.390	.570	.375	.750	2.140	.218	.250	.375	.125	

Notes:

1. Material - Copper, Specification QQ-C-502.
2. Remove all burrs and sharp edges.
3. Finish - Nickel Plate, Specification QQ-N-290, Type V.
4. Unless otherwise specified, dimensions are in inches, tolerances on decimals ± .010, angles ± 5°.
5. Steel stamp part no. .005 deep min. using .125 high characters before plating.
6. Referenced documents shall be of the issue in effect on date of invitations for bid.

(B) REDRAWN

APPROVED 23 MAR 64 REVISED (A) 18 MAR 69 (B) 26 MAY 77

and Agencies of the Department of Defense.

P. A. Air Force-99 Other Cust	INTERNATIONAL INTEREST	TITLE CONNECTOR, BATTERY CELL, OFFSET	MILITARY STANDARD MS27308 (99)
PROCUREMENT SPECIFICATION MIL-B-26220	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

6140-F453

Source: https://assist.dla.mil -- Downloaded: 202610-23T15:21Z
Check the source to verify that this is the current version before use.