INCH-POUND

MS27342E
W/AMENDMENT 1
8 February 2008
SUPERSEDING
MS27342E
12 July 2002

DETAIL SPECIFICATION SHEET

CONNECTORS, ADAPTER, ELECTRICAL, SERIES I AND II

Inactive for new design after 7 December 1998.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

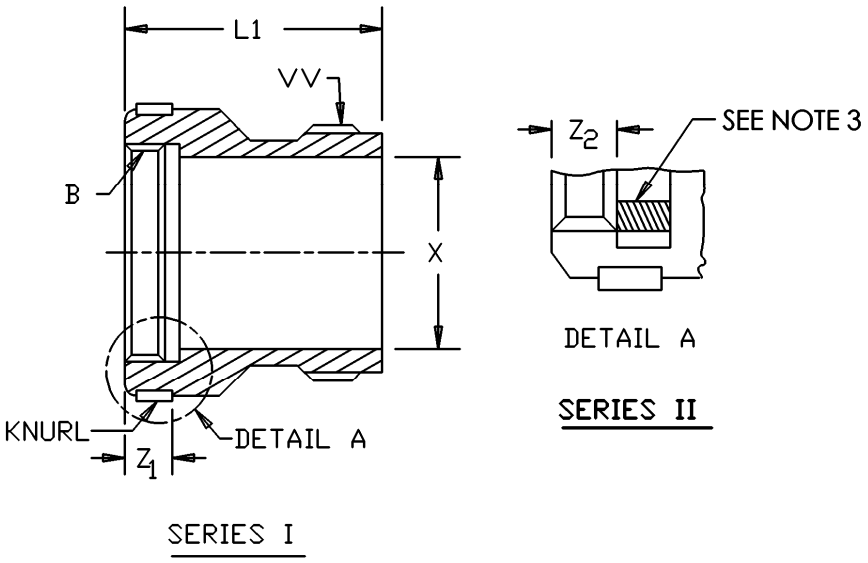


FIGURE 1. Open adapter (-1).

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

Shell size series I	Shell size series II	B Thread class 2B UNEF	L_1 max	X dia min	Z_1 +.000, -.015 series I	Z_2 +.005, -.010 series II	V V Thread class 2A UNEF
9	8	7/16-28	.688 (17.48)	.281 (7.14)	.219 (5.56)	.114 (2.90)	1/2-28
11	10	9/16-24		.406 (10.31)			5/8-24
13	12	11/16-24		.531 (13.49)			3/4-20
15	14	13/16-20		.656 (16.66)			7/8-20
17	16	15/16-20		.781 (19.84)			1-20
19	18	1 1/16-18		.875 (22.23)			1 3/16-18
21	20	1 3/16-18	.750 (19.05)	1.000 (25.40)			
23	22	1 5/16-18		1.125 (28.58)			1 7/16-18
25	24	1 7/16-18		1.250 (31.75)			

NOTES:
1. Dimensions are in inches. Metric equivalent are given for information only.
2. Materials: Adapter body: aluminum alloy.
3. On series II adapters, the Z_2 dimension may be achieved by two-piece construction.

FIGURE 1. Open adapter (-1) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

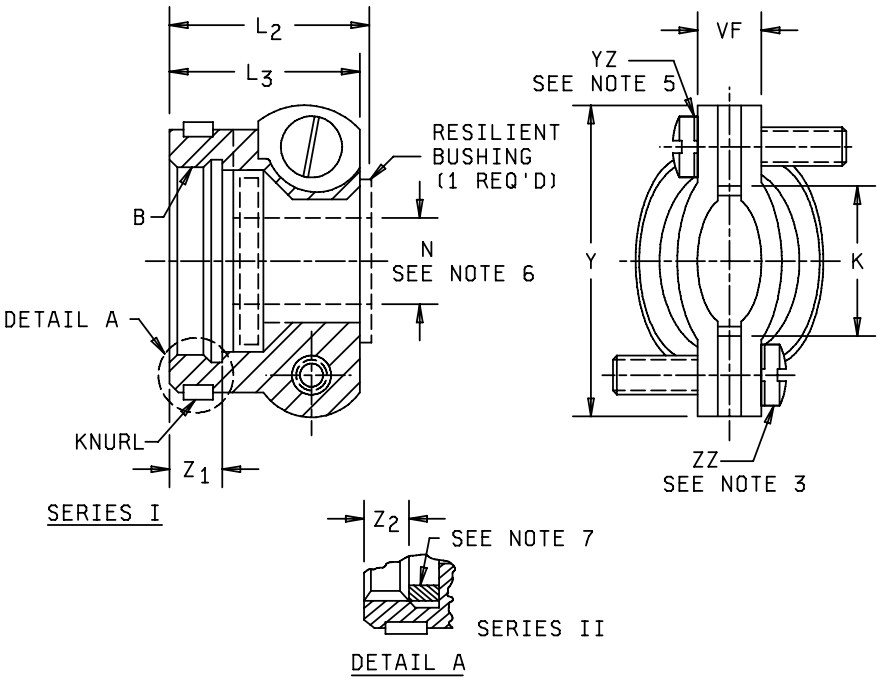


FIGURE 2. Strain relief adapter (-2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

Shell size series I	Shell size series II	B Thread class 2B UNEF	N free dia +.010 -.025	L_2 max	L_3 max	X dia min open	Y max
9	8	7/16-28	.125 (3.18)	.875 (22.23)	.781 (19.84)	.234 (5.94)	.628 (15.95)
11	10	9/16-24	.188 (4.78)			.297 (7.54)	.981 (24.92)
13	12	11/16-24	.312 (7.92)			.422 (10.72)	1.016 (25.81)
15	14	13/16-20	.375 (9.53)	.938 (23.83)	.844 (21.44)	.547 (13.89)	1.141 (28.98)
17	16	15/16-20	.500 (12.70)			.609 (15.47)	1.203 (30.56)
19	18	11/16-18	.625 (15.88)			.734 (18.64)	1.469 (37.31)
21	20	13/16-18		1.000 (25.40)	.906 (23.01)		
23	22	15/16-18	.750 (19.05)			.922 (23.42)	1.656 (42.06)
25	24	17/16-18	.800 (20.32)			.964 (24.49)	1.750 (44.45)

Shell size series I	Shell size series II	Z_1 +.000, -.015 Series I	Z_2 +.005, -.010 Series II	VF max closed	ZZ Screws NASM35273 see note 3	YZ Lockwashers see note 5
9	8	.219 (5.56)	.114 (2.90)	.187 (4.75)	-30	NASM35338-98 or NASM35338-41
11	10					
13	12			.261 (6.63)		
15	14			.325 (8.26)	-32	AN936-A6B or AN936-A6
17	16			.356 (9.04)		
19	18			.456 (11.58)	-48	NASM35338-99 or NASM35338-42
21	20			.519 (13.18)		
23	22				-50 see note 4	AN936-A8B or AN936-A8
25	24			.657 (16.69)		

FIGURE 2. Strain relief adapter (-2) – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches. Metric equivalents are given for information only.
2. Materials: Adapter body and clamping bars: Aluminum alloy. Resilient bushing: Silicone.
3. Drill hole in head is optional.
4. Except that length of screw under head shall be 1.125 +.000 -.062.
5. Lockwashers may be captivated.
6. Use MS3420 bushing if reduced opening is required.
7. On series II adapters, the Z_2 dimension may be achieved by two-piece construction.

FIGURE 2. Strain relief adapter (-2) - Continued.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.
Interface dimensions shall conform to MIL-DTL-38999.
Mating connectors: MIL-DTL-38999, series I and series II.

Qualification:

Examination of product.
Mating and unmating forces.
Humidity.
Salt spray (corrosion).
Altitude immersion.


Group A sampling inspection. 100% inspection is not applicable. Sampling inspection shall be specified in table I:

TABLE I. Group A sampling plan.

Lot size	Sample size
1 to 13	100 percent
14 to 150	13 units
151 to 280	20 units
281 to 500	29 units
501 to 1,200	34 units
1,201 to 3,200	42 units

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:

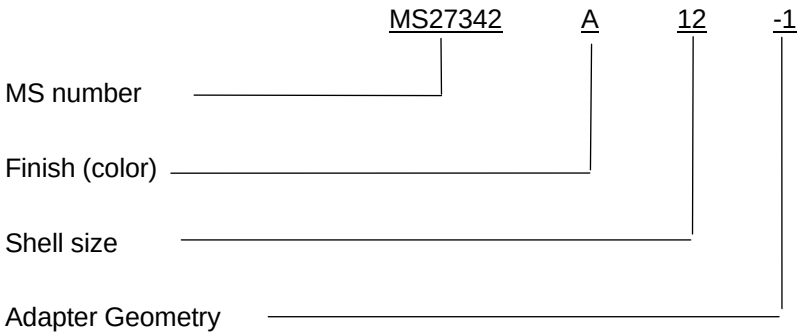

-1: open adapter
-2: strain relief adapter

Amendment notations. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MS3420
NASM35273

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2007-165)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at **http://assist.daps.dla.mil.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.