
FED. SUPPLY CLASS 5306

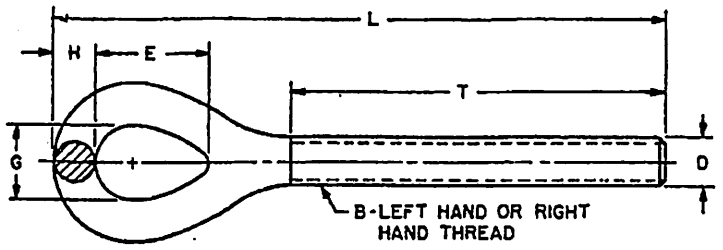

DASH NO. LEFT HAND	DASH NO. RIGHT HAND	D DIA NOM	B THREADS UNC-2A	E MIN	G MIN	H DIA MIN	L REF	T REF	TURNBUCKLE CLEAR OPENING REF	RECOMMENDED WORKING LOAD LBS.
1	2	1/4	20	.688	.344	.219	4.25	2.56	4.00	500
3	4	5/16	18	.938	.439	.281	5.00	3.00	4.50	700
5	6	3/8	16	1.125	.531	.344	6.12	3.75	6.00	1,040
7	8	1/2	13	1.250	.719	.438	6.88	4.00	6.00	1,600
9	10						6.38	5.50	9.00	
11	12						9.88	7.00	12.00	
13	14	5/8	11	1.562	.875	.500	7.75	4.25	6.00	2,700
15	16						9.25	5.75	9.00	
17	18						10.75	7.25	12.00	
19	20						13.75	6.75	16.00	
21	22	3/4	10	2.125	1.000	.625	8.75	4.50	6.00	4,000
23	24						10.25	6.00	9.00	
25	26						11.75	7.50	12.00	
27	28						14.75	10.50	18.00	
29	30						17.75	13.50	24.00	
31	32	7/8	9	2.375	1.250	.750	12.62	7.75	12.00	5,800
33	34						15.62	10.75	18.00	
35	36						18.62	13.75	24.00	
37	38	1	8	2.625	1.438	.875	13.88	8.00	12.00	7,600
39	40						16.88	11.00	18.00	
41	42						19.88	14.00	24.00	
* 43	* 44	1-1/8	7	2.312	1.562	.969	13.56	8.88	12.00	6,300
* 45	* 46						16.56	11.88	18.00	
47	48	1-1/4	7	3.375	1.688	1.125	15.50	8.75	12.00	12,000
49	50						18.50	11.75	18.00	
51	52						21.50	14.75	24.00	
53	54	1-1/2	6	4.125	2.125	1.250	16.75	9.50	12.00	17,000
55	56						19.75	12.50	18.00	
57	58						22.75	15.50	24.00	
59	60	1-3/4	5	4.688	2.375	1.375	21.00	14.00	18.00	23,000
61	62	2	4-1/2	4.375	2.688	1.625	26.00	18.00	24.00	30,000
63	64	2-1/2	4	6.000	3.125	2.000	25.50	15.00	18.00	44,400

NOTES:

1. MATERIAL: Steel, form 1 (forged), in accordance with procurement specification.
2. PROTECTIVE COATING: Zinc coated (hot dip galvanized) in accordance with procurement specification.
3. THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H28.
4. DIMENSIONS: All dimensions are in inches, unless otherwise specified..
5. PART NUMBER: The MS part number consists of the MS number plus the dash number. Example: MS27950-1.
6. Recommended working load (safety factor 5 to 1) based on breaking strength at thread root.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9. * Dash numbers 43 thru 46, inclusive, are inactive for new design. No longer manufactured.
10. The illustration is for identification purposes only and is not intended to restrict designs and shapes not dimensioned.

Ⓐ ENTIRE STANDARD REVISED

REVIEWER: EL, IS, ME, MI, NSA, 85
USER: AS, AT, MC, OS, YD

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 9 FEB 61 REVISED Ⓐ 21 MAR 1969

P.A.	DC
Other Cust	SH 82

TITLE: BOLT, EYE - TURNBUCKLE (GENERAL PURPOSE)

MILITARY STANDARD

MS27950

PROCUREMENT SPECIFICATION: FF-T-791

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-03-23T16:53Z
Check the source to verify that this is the current version before use.