FED. SUP CLASS
6610


DIAL AND POINTER SHOWN FOR REFERENCE ONLY
FOR DETAILS SEE PROCUREMENT SPECIFICATION

HERMETICALLY SEALED RECEPTACLE
(MS33678 10SL-3P)


CASE IN ACCORDANCE
WITH MS33638

4.625 max

APPLICABLE DASH NUMBER

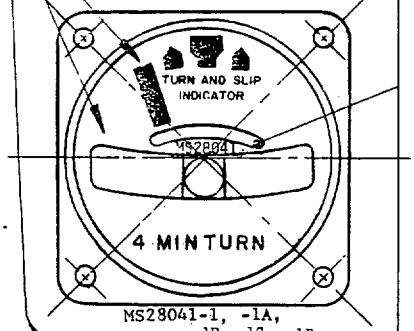


MS28041-1, -1A,
-1B, -1C, -1D

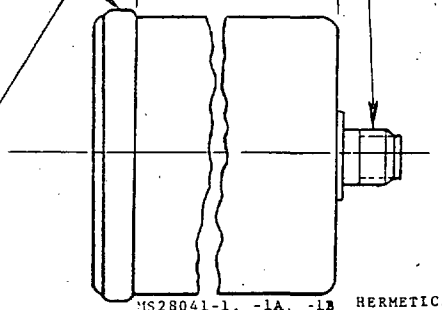


MS28041-1, -1A, -1B
-2, -2A

HERMETICALLY
SEALED RECEPTACLE
TO MATE WITH
AMPHENOL P/N
67-06P14-5S
OR EQUIVALENT

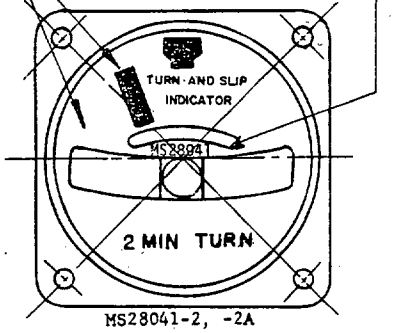

MS28041-2, -2A

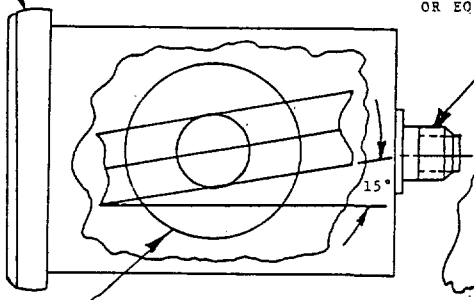


(MS28041-1C, -1D)

GYRO TILTED 15° AS SHOWN TO COMPENSATE
FOR SLANTED PANEL MOUNTING.

STENCIL LETTER .125 HIGH APPROX. AS SHOWN
USING INSIGNIA WHITE ACRYLIC LACQUER
(SILK SCREEN) ANA 601 (MS28041-1C, -1D)

THE INSTRUMENT SHALL PROVIDE LIGHTING
IN ACCORDANCE WITH MIL-L-25467.
(MS28041-1C, -1D)



MS PART NO.	SENSITIVITY	BALL COLOR	CASE	COLOR OF DIAL MARKING
MS28041-1	4 MIN TURN	DARK	HERMETICAL	FLUORESCENT
MS28041-1A	4 MIN TURN	WHITE	HERMETICAL	LUSTERLESS WHITE
MS28041-1B	4 MIN TURN	DARK	HERMETICAL	LUSTERLESS WHITE
MS28041-1C	4 MIN TURN	DARK	HERMETICAL	FLUORESCENT
MS28041-1D	4 MIN TURN	DARK	HERMETICAL	LUSTERLESS WHITE
MS28041-2	2 MIN TURN	DARK	HERMETICAL	LUSTERLESS WHITE
MS28041-2A	2 MIN TURN	WHITE	HERMETICAL	FLUORESCENT

CERTAIN PROVISIONS (VOLTAGE AND CASE DIMENSIONS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC 10/5 AND STANAG 3322. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, WHICH AFFECTS OR VIOLATES THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS-INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

DIMENSIONS IN INCHES

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 31 DEC 54 — REVISED (A) 11 Jul 55 (B) 1 Dec 65 (C) 15 Oct 68 (D) 18 Nov 69 (E) 6 June 1972 (F) 31 July 1973 (G) 11 Jul 1988

P.A. USAF - 71 Other Cust (G) NAVY - AS ARMY - AV AF - 99	TITLE INDICATOR, TURN AND SLIP, 28V DC, 1-7/8 INCH DIAL		MILITARY STANDARD MS 28041
PROCUREMENT SPECIFICATION MIL-I-7627	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 SEP 65 672-1 (Coordinated) — EDITION OF 1 SEP 57 MAY BE USED. — 6610-0259

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
AMSC N/A
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications for repetitive use shall be made from this document when applicable.

DRAWN BY Lester Lambert — DATE 4 Jan 89
TYPED BY — DATE
CHECKED BY — DATE

NOTES TO PRINTER: REDUCE BORDER TO 6-27/32x9-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10-1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8x10-1/2 SHEET.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56:
Check the source to verify that this is the current version before use.