INCH-POUND
MS28753E
5 June 2012
SUPERSEDING
MS28753D
6 August 2010

DETAIL SPECIFICATION SHEET

FITTING END, SELF-SEALING FUEL HOSE, SWIVEL, DETACHABLE, FLANGED, STRAIGHT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.


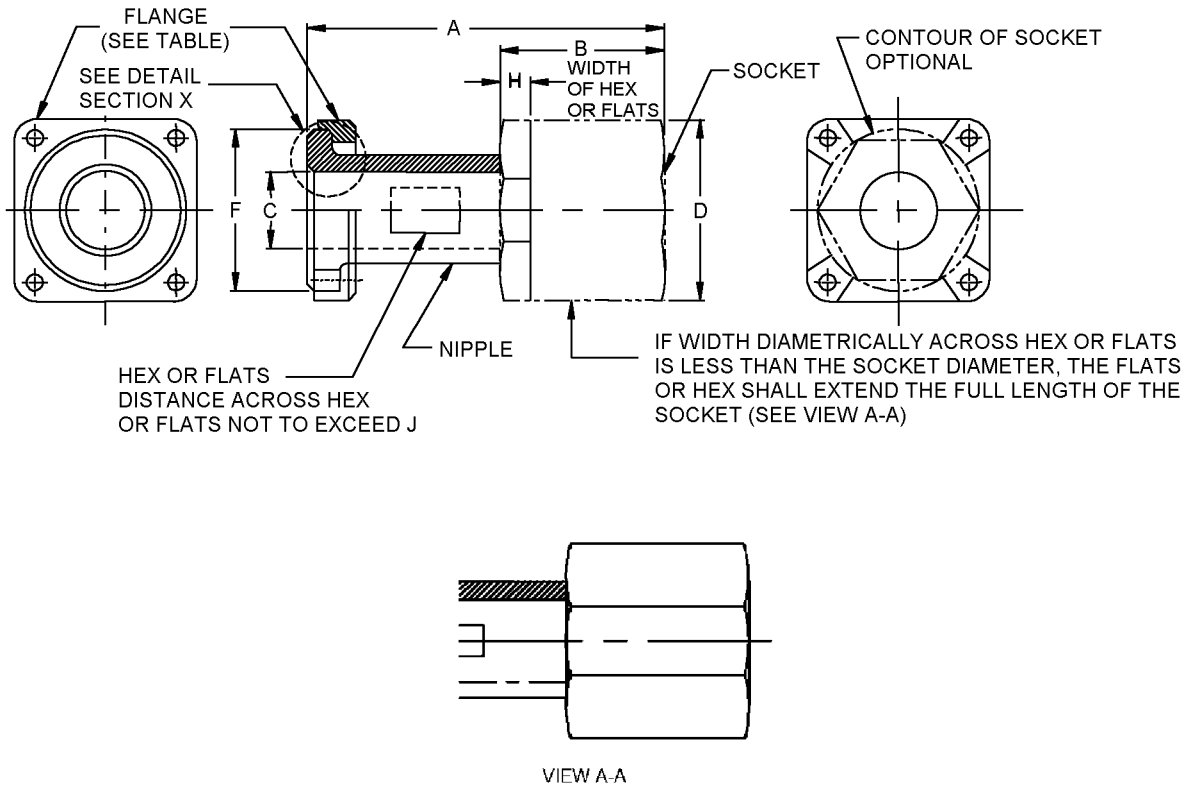


FIGURE 1. Straight fuel hose fitting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

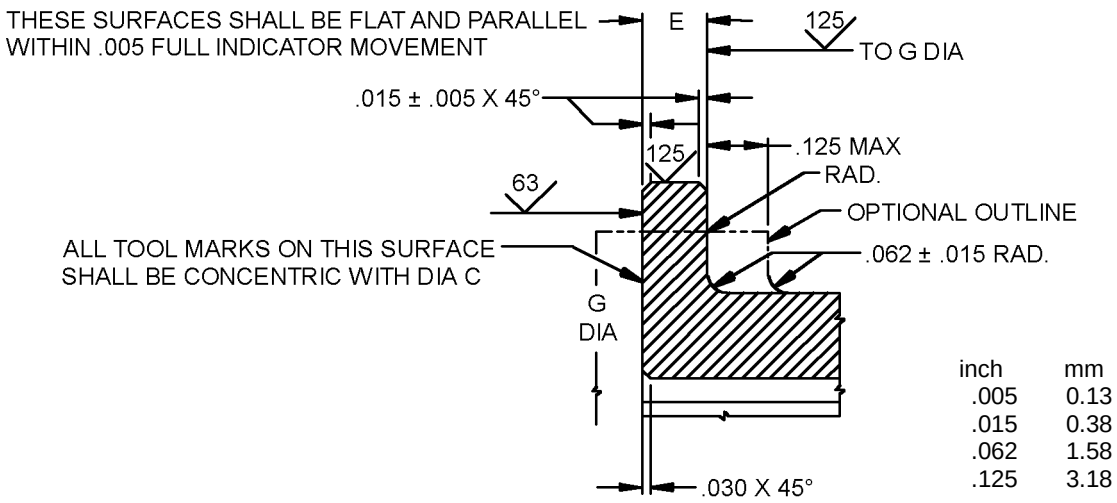

DETAIL SECTION X

Size designator	Nominal tubing and hose size (REF)	Flange PIN (see notes 4 and 5)	A Max inch (mm)	B Max inch (mm)	C Min (see note 6) inch (mm)	D Max inch (mm)
16	1 (1.000)	MS20756*16	3.141 (79.78)	2.000 (50.80)	.813 (20.65)	1.953 (49.61)
20	1 ¼ (1.250)	MS20756*20	3.141 (79.78)	2.000 (50.80)	1.047 (26.59)	2.313 (58.75)
24	1 ½ (1.500)	MS20756*24	3.078 (78.18)	2.000 (50.80)	1.281 (32.54)	2.563 (64.41)
32	2 (2.000)	MS20756*32	3.500 (88.90)	2.250 (57.15)	1.750 (44.45)	3.125 (79.38)
40	2 ½ (2.500)	MS20756*40	3.891 (98.83)	2.500 (63.50)	2.250 (57.15)	3.625 (92.08)
48	3 (3.000)	MS20756*48	3.891 (98.83)	2.500 (63.50)	2.875 (73.03)	4.438 (112.73)

Size designator	E +.000 -.005 (0.13) inch (mm)	F (see note 6) +.000 -.005 (0.13) inch (mm)	G Max (see note 6) inch (mm)	H Min inch (mm)	J Min inch (mm)
16	.156 (3.96)	1.500 (28.10)	1.188 (30.18)	.375 (9.53)	1.343 (34.11)
20	.156 (9.36)	1.844 (46.84)	1.500 (38.10)	.500 (12.70)	1.656 (42.06)
24	.188 (4.48)	2.125 (53.98)	1.750 (44.45)	.500 (12.70)	1.906 (48.41)
32	.188 (4.48)	2.750 (69.85)	2.375 (60.33)	.625 (15.88)	2.531 (64.29)
40	.188 (4.48)	3.281 (83.34)	2.875 (73.03)	1.000 (25.40)	3.051 (77.50)
48	.188 (4.48)	3.781 (96.04)	3.375 (85.73)	1.250 (31.75)	3.250 (82.55)

NOTES:
1. Dimensions are in Inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances: decimals ± .010 (0.25 mm); angles ± .01°.
4. Part or Identifying Number (PIN).
5. Material designator D, W or T see MS20756.
6. Dimensions C, F and G shall be concentric within .010 inch (0.25 mm) full indicator reading.

FIGURE 1. Straight fuel hose fitting - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material: Materials shall be in accordance with table I and SAE-AS4841.

TABLE I. Material designators.

Material designator	Alloy	Finish
D	Aluminum alloy 2014 or 2024	Anodize in accordance with MIL-A-8625, type II. 1/
W	Aluminum alloy 7075	Anodize in accordance with MIL-A-8625, type II. 1/
Dash (-)	Titanium 2/	Fluoride phosphated in accordance with SAE-AMS2486 3/
T	Titanium 2/	Anodized in accordance with SAE-AMS2488, type 2


1/ Aluminum alloys 2014 and 2024 aluminum shall be dyed light blue. Aluminum alloy 7075 shall be dyed brown.
2/ Titanium shall not be used in oxygen systems.
3/ Color equivalent to numbers /36076, /36081, /36099, /36118, /36134, /36152, /36170, /36173, and /36176 in accordance with FED-STD-595.

Hex or flats shall fit standard wrench openings.

Surface roughness shall be in accordance with ASME-B46.1.

Remove all burrs and sharp edges. The interior surface of the fitting shall be smooth and free from projections.

PIN. The PIN shall consist of the prefix MS followed by the specification sheet number, letter for material designator, and a number for the size.

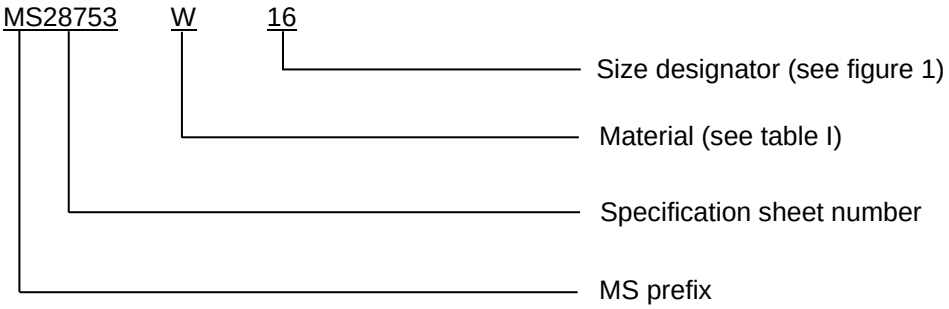

Example of PIN: MS28753W16 indicates a straight swivel with flange, aluminum, 1 inch hose or tubing size.

Fittings shall be permanently marked with the applicable MS PIN on an unfinished surface of the nipple.

Approximate weights are shown in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

TABLE II. Approximate weight.

Size designator	Weight (Approx) lb (g)	
	Aluminum	Titanium
16	.261 (118.4)	.43 (195.0)
20	.299 (135.6)	.49 (222.3)
24	.305 (138.3)	.50 (226.8)
32	.325 (147.4)	.54 (244.9)
40	.607 (275.3)	1.00 (453.6)
48	.954 (432.7)	1.58 (716.7)

Intended use: Hose assemblies using hose in accordance with MIL-PRF-7061.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. This document references the following:

FED-STD-595/36076
FED-STD-595/36081
FED-STD-595/36099
FED-STD-595/36118
FED-STD-595/36134
FED-STD-595/36152
FED-STD-595/36170
FED-STD-595/36173
FED-STD-595/36176
MIL-A-8625
MIL-PRF-7061
MS20756
ASME-B46.1
SAE-AMS2486
SAE-AMS2488
SAE-AS4841

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2012-026)

Review activities:
Navy - MC, SH
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.