
FED. SUP CLASS
5935

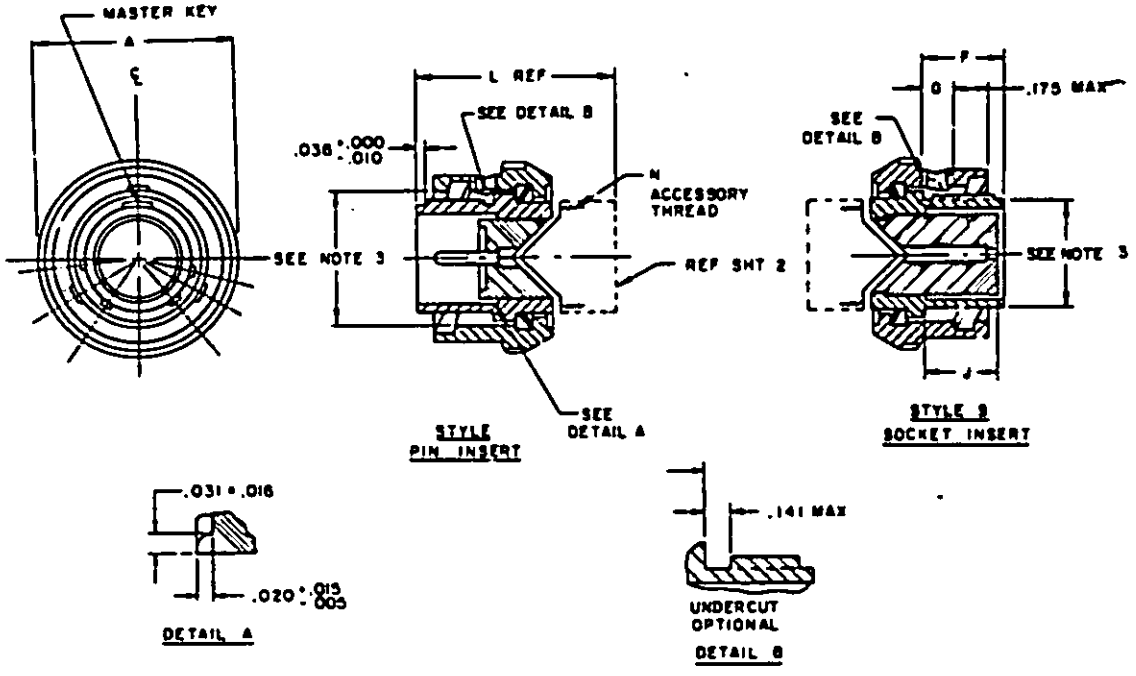


Classes E, F, J and P plugs

| Size | A Max dia overall | F ±.010 Shldr location | G ±.020 Bay lock location | J +.020 -.000 Socket insert location | N Class 2A accessory thread UNEF |
|---|---|---|---|---|---|
| 8 | .782 | .353 | .113 | .337 | .438-28 |
| 10 | .926 | | | | .562-24 |
| 12 | 1.043 | | | | .6875-24 |
| 14 | 1.183 | | | | .8125-20 |
| 16 | 1.305 | | | | .9375-20 |
| 18 | 1.391 | | | | 1.0625-18 |
| 20 | 1.531 | .415 | | .399 | 1.1875-18 |
| 22 | 1.656 | | | | 1.3125-18 |
| 24 | 1.777 | | .152 | | 1.4375-18 |

(D) FOR CHANGES SEE SHEET 2

APPROVED 14 May 59
REVISED (A) 24 Aug 62 (B) 15 Feb 67 (C) 5 SEPT 1975 (D) 19 Aug 76

User activities: Army AV
Navy
Air Force

Reviewer activities: Army MU, MI, EL
Navy EC, SH
Air Force 11, 17

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use will be made from this document.

P.A Navy - AS
Other Cust
Army - EL
AF - 85

Procurement Specification
MIL-C-26482

TITLE
CONNECTORS, PLUG, ELECTRIC, SERIES 1, SOLDER TYPE, STRAIGHT, BAYONET COUPLING

SUPERSEDES:

MILITARY STANDARD
MS 3116
SHEET 1 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2070-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935



NOTES:
1. Dimensions are in inches.
2. True position (TP) tolerances specified are in accordance with ANSI Y14.5-1973.
3. Intermateability dimensions shall be in accordance with MIL-C-26482.
4. Insert arrangements see MIL-STD-1669.
5. Example of part number:

MS3116 E 12 - 3 P W
- MS number
- Class
- Size
- Insert arrangement
- Contact style
- Alternate insert position

6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.
8. NOT FOR AIR FORCE USE, USE MS3476.

DIMENSIONS WITH BUSHING REMOVED

APPROVED 14 May 59 REVISED © Entire standard revised ⓓ FOR CHANGES SEE SHEET 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities: Army AV
Navy
Air Force

Reviewer activities: Army MU, MI, EL
Navy EC, SH
Air Force 11, 17

P.A Navy - AS

Other Cust
Army - EL
AF - 85

Preparing activity:

MIL-C-26482

TITLE
CONNECTORS, PLUG, ELECTRIC, SERIES 1, SOLDER TYPE, STRAIGHT, BAYONET COUPLING

SUPERSEDES:

MILITARY STANDARD

MS 3116

SHEET 2 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2070-3

☆ U.S. GOVERNMENT PRINTING OFFICE: 1978-603 766/5700

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.