
USER SYMBOLS:
REVIEWER SYMBOLS:
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."
This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

PED: SUP CLASS
6685

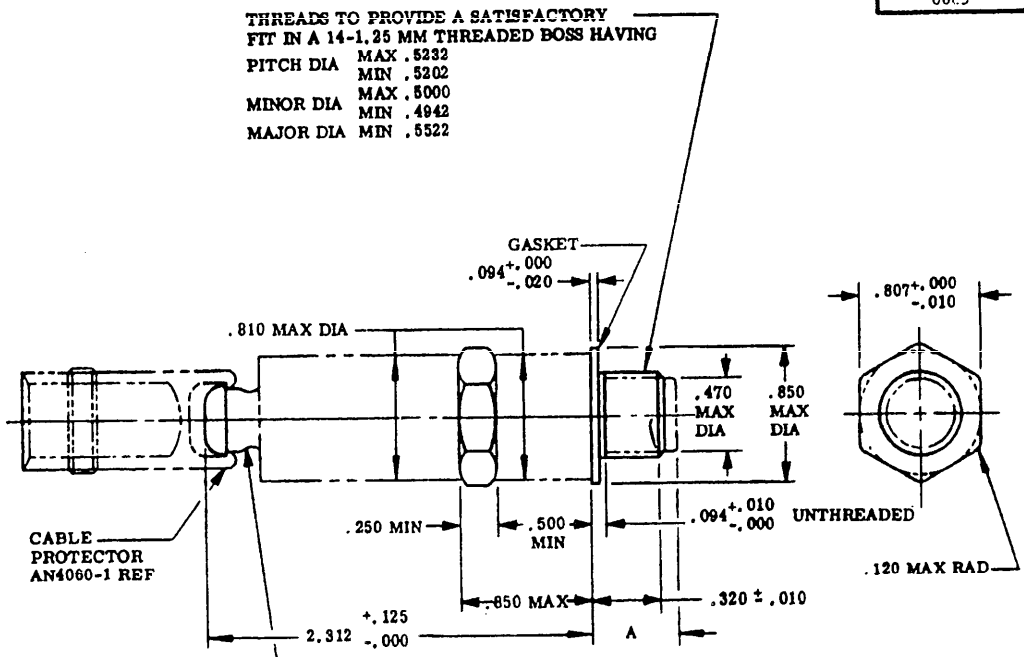

DASH NO.		A ±.100
TYPE I REUSABLE	TYPE II REUSABLE AND REFILLABLE	
-1A	-11	1.062
-2	-12	.474

NOTES:

1. SEATING TORQUE TO BE 18 LB-IN. MAXIMUM.
2. PROOF TORQUE TO BE 25 LB-IN. MINIMUM.
3. PLUGS SHALL BE FILLED WITH A MINIMUM OF 5 GRAMS OF DESICCANT CONFORMING TO MIL-D-3716 TYPE IV, GRADE H.
4. DIMENSIONS IN INCHES.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 1 Jul 63 REVISED

P.A. NAVY – AS Other Cust AF-82 ARMY-ME	TITLE PLUG, DEHYDRATOR, HUMIDITY INDICATING, ENGINE CYLINDER, 14 MM THREAD	MILITARY STANDARD MS3396
PROCUREMENT SPECIFICATION MIL-I-6131	SUPERSEDES: AN4064	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 17708

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:04Z
Check the source to verify that this is the current version before use.