INCH-POUND
MS51606D
31 August 2011
SUPERSEDING
MS51606C
7 April 1989

DETAIL SPECIFICATION SHEET

PIN, GROOVED, HEADLESS (HALF LENGTH REVERSE TAPER GROOVE) CORROSION-RESISTANT STEEL

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and procurement specification NASM20700.

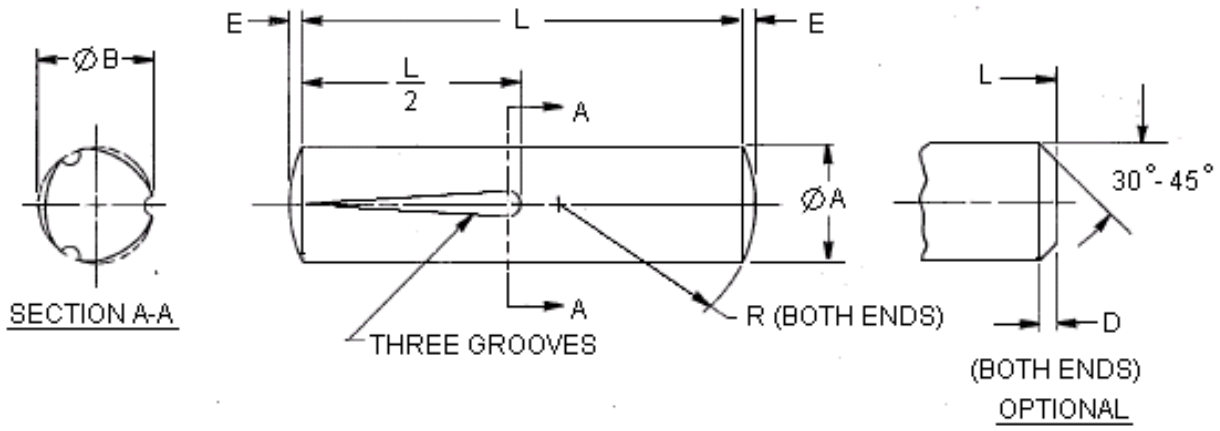


FIGURE 1. Pin.

AMSC N/A

FSC 5315

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.

TABLE I. Dash Numbers and Dimensions.

∅A	.0469 +.0000 -.0010		.0625 +.0000 -.0010		.0781 +.0000 -.0010		.0938 +.0000 -.0010		.1250 +.0000 -.0020	
D CHAMFER LENGTH 1/ MIN	---		.016		.016		.016		.016	
E CROWN HEIGHT 1/ REF	---		.0065		.0087		.0091		.0130	
R RADIUS ±.010	---		.078		.094		.125		.156	
RECOMMENDED HOLE SIZE DRIVE FIT MAX	.0482		.0640		.0798		.0956		.1271	
MIN	.0469		.0625		.0781		.0938		.1250	
SINGLE SHEAR STRENGTH – LBS MIN	150		270		430		620		1100	
L LENGTH	DASH NO.	∅B ±.001	DASH NO.	∅B ±.001	DASH NO.	∅B ±.001	DASH NO.	∅B ±.001	DASH NO.	∅B ±.002
.375	54	.050	55	.066	56	.082	57	.099	58	.132
.500	1	.050	3	.066	8	.082	13	.099	19	.132
.625	2	.050	4	.066	9	.082	14	.099	20	.132
.750			5	.066	10	.082	15	.099	21	.132
.875			6	.066	11	.082	16	.099	22	.132
1.000			7	.066	12	.082	17	.099	23	.132
1.250							18	.099	24	.132
1.500									25	.132

∅A	.1563 +.0000 -.0020		.1875 +.0000 -.0020		.2188 +.0000 -.0020		.2500 +.0000 -.0020	
D CHAMFER LENGTH 1/ MIN	.031		.031		.031		.031	
E CROWN HEIGHT 1/ REF	.0170		.0180		.0220		.0260	
R RADIUS ±.010	.188		.250		.281		.312	
RECOMMENDED HOLE SIZE DRIVE FIT MAX	.1587		.1903		.2219		.2534	
MIN	.1563		.1875		.2188		.2500	
SINGLE SHEAR STRENGTH – LBS MIN	1720		2480		.3380		4420	
L LENGTH	DASH NO.	∅B ±.002	DASH NO.	∅B ±.002	DASH NO.	∅B ±.002	DASH NO.	∅B ±.002
.375	59	.164	60	.195	61	.227	62	.260
.500	26	.164	33	.195	40	.227	47	.260
.625	27	.164	34	.195	41	.227	48	.260
.750	28	.164	35	.195	42	.227	49	.260
.875	29	.164	36	.195	43	.227	50	.260
1.000	30	.164	37	.195	44	.227	51	.260
1.250	31	.164	38	.195	45	.227	52	.260
1.500	32	.164	39	.195	46	.227	53	.260

1/ Ends may be crowned or chamfered or may be square with .01 to .02 radius on the ends.


REQUIREMENTS:

1. Material: CRES 300 series in accordance with ASTM A276. Minimum ultimate shear strength 90,000 PSI.

2. Protective Coating: Passivate in accordance with SAE-AMS2700.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.

3. Part Identifying Number (PIN) The pin shall consist of the MS number and a dash number taken from Table I.

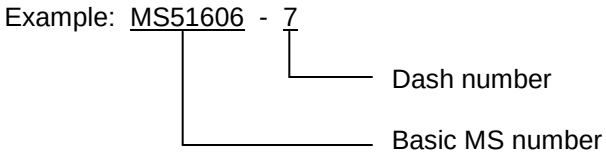

MS51606-7 indicates - Pin, Grooved, Headless (Half Length Reverse Taper Grooves)
Corrosion Resistant Steel; Length 1.000; ∅.0625

NOTES:

1. All dimensions are in inches.
2. " ∅B" is the expanded diameter as measured with a "GO" and "NOT GO" ring gage.
3. This item serves as dowel pins in applications with a blind holes.
4. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
5. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

MILITARY INTEREST

Custodians:
Army – AR
Navy – AS
Air Force – 99

Review activities:
Army - AT, AV, MI
Navy – OS, SH

Preparing activity:
DLA - IS

(Project 5315-2011-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.