
FED. SUP CLASS
5310

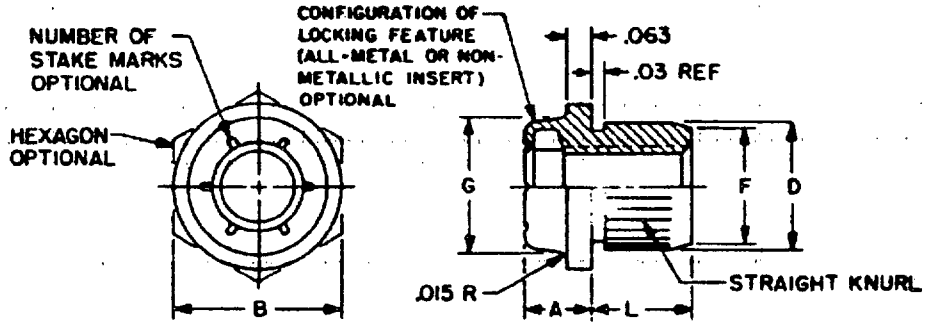

* (A) DASH NUMBER				THREAD	A ±.015	B DIA ±.015	D DIA		F REF	G REF	L ±.015	RECOMMENDED HOLE SIZE	
CARBON STEEL	AL ALLOY	BRASS	CRES STEEL				MIN	MAX				MIN	MAX
1	1A	1B	1C	6-32UNC-3B	.172	.438	.321	.325	.287	.370	.125	.312	.316
3	3A	3B	3C								.188		
8	8A	8B	8C	10-32UNF-3B	.172	.438	.321	.325	.287	.370	.125	.312	.316
10	10A	10B	10C								.188		
14	14A	14B	14C								.313		
18	18A	18B	18C	1/4-28UNF-3B	.188	.563	.384	.388	.350	.438	.188	.375	.379
20	20A	20B	20C								.250		
23	23A	23B	23C								.375		
27	27A	27B	27C	5/16-24UNF-3B	.234	.625	.446	.450	.412	.500	.188	.437	.441
29	29A	29B	29C								.250		
32	32A	32B	32C								.375		
35	35A	35B	35C	3/8-24UNF-3B	.281	.688	.509	.513	.475	.570	.188	.500	.504
37	37A	37B	37C								.250		
39	39A	39B	39C								.375		
~~43~~	~~43A~~	~~43B~~	~~43C~~	7/16-20UNF-3B	.359	.750	.571	.575	.537	.660	.344	.562	.566
~~44~~	~~44A~~	~~44B~~	~~44C~~								.438		
47	47A	47B	47C	1/2-20UNF-3B	.375	.875	.696	.700	.662	.770	.375	.687	.691
48	48A	48B	48C								.438		

NOTES:

1. MATERIAL: Steel, carbon, Grade B in accordance with procurement specification.
   Steel, corrosion-resisting, in accordance with procurement specification.
   Aluminum alloy in accordance with procurement specification.
   Brass in accordance with procurement specification.
   Non-metallic insert shall be nylon or equivalent.
2. PROTECTIVE COATING: Steel, carbon: Cadmium plated in accordance with procurement specification.
   Steel, corrosion-resisting: Passivated in accordance with procurement specification.
   Aluminum alloy: Anodized in accordance with procurement specification.
   Brass: Uncoated.
3. THREADS: The threads shall be in accordance with the procurement specification.
4. DIMENSIONS: All dimensions are in inches.
5. PART NUMBER: The MS part number consists of the MS number, plus the dash number.
   Example: MS51866-1.
6. Referenced documents shall be of the issue in effect on date of invitations for bid.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. These nuts shall be used in accordance with the limitations of MS33588.

(A) * LINED OUT DASH NUMBERS ARE INACTIVE FOR NEW DESIGN AFTER 15 JAN 1976.

REVIEWER: AT, AV, EA, EL, GL, IS, NSA
USER: AS, MC, ME, OS, PA, SH, WV

APPROVED 22 JUN 1970 REVISED (A) 15 JAN 1976

...tary standard is approved for use by all Departments and Agencies ...partment of Defense. Selection for all new engineering and design ...ons and for repetitive use shall be made from this document.

P.A.	WC
Other Cust	82

TITLE: NUT, SELF-LOCKING, SPLINE - GENERAL PURPOSE, 250°F

MILITARY STANDARD
MS51866

PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET
MIL-N-45913		1 OF 1

DD FORM 672-1

5310-0807

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:11Z
Check the source to verify that this is the current version before use.