
FED. SUP CLASS
2330

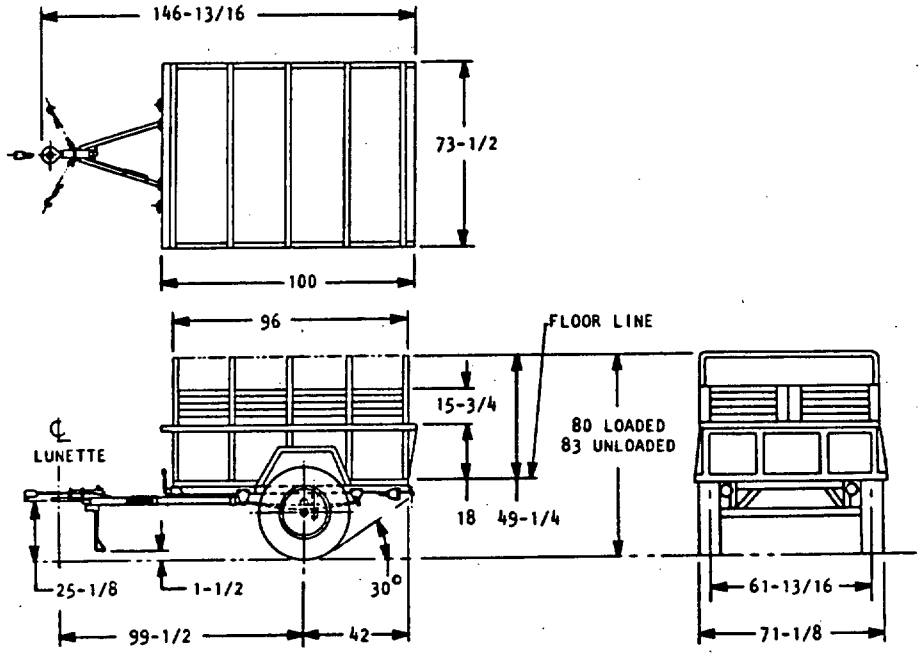

VEHICLE CHARACTERISTICS

PRIME MOVER: CUCV, HMMWV, M880 TRUCKS, 1-1/4 TON

BASIC CHASSIS: M116A2 8750054

CURB WEIGHT: FULLY EQUIPPED 1280 LBS.

PAYLOAD: 1500 LBS.

GROSS WEIGHT: 2780 LBS.

WEIGHT DISTRIBUTION:

	EMPTY	LOADED
AXLE	1143 LBS.	2511 LBS.
LUNETTE	137 LBS.	269 LBS.
TOTAL	1280 LBS.	2780 LBS.

BODY DATA:

WIDTH BETWEEN SIDE PANELS	66 IN.
WIDTH BETWEEN WHEEL HOUSING (MAX.)	45-1/2 IN.
LENGTH (INSIDE)	94-1/4 IN.
HEIGHT, FLOOR TO BOWS	50 IN.
BODY FLOOR ABOVE GROUND, APPROX.	23 IN.

GENERAL: TRAILER, CARGO, 3/4 TON, 2 WHEEL, M101A2 W/E, TRANSPORTS VARIED TYPES OF LOADS ON HIGHWAYS AND CROSS COUNTRY. THE TAILGATE IS HINGED TO THE BODY. TWO HAND BRAKE LEVERS AT THE FRONT OF THE BODY AND A DRAWBAR ASSEMBLY IS ATTACHED TO THE FRONT OF THE CHASSIS. THIS MODEL IS ALSO EQUIPPED WITH AN INERTIA-ACTUATED HYDRAULIC BRAKE SYSTEM. A RETRACTABLE FRONT SUPPORT LEG IS ATTACHED TO THE DRAWBAR BRACKET, AND TWO TAILLIGHTS ARE MOUNTED AT THE REAR OF THE CHASSIS TRAILER: 3/4 TON, 2 WHEEL M116A2, UNDERNEATH THE BODY OF THE TRAILER.

LANDING GEAR: STRUT TYPE 7339354
OPTIONAL 11631877

FORDING DEPTH: 30 IN.

ACCESSORIES: KIT, INSTALLATION
STABILIZER, REAR 10944400
BOWS & TARPAULIN KIT 11674804

ELECTRICAL: INSTL 7344831
POTENTIAL; 24 V.
TAILLIGHT; COMPOSITE, TWO 11614157

FRAME: ASSEMBLY 10910696
CROSS MEMBERS, FIVE
SIDE RAIL, CHANNEL, 3 x 1-1/2 x 0.15
SECTION MODULUS (CHASSIS SIDE RAIL), 0.77 IN^3

AXLE: TUBULAR 12313006

SPRINGS: SEMI-ELLIPTIC 12313029
2-IN. WIDE x 46-IN. LONG, FIVE LEAVES

SHOCK ABSORBERS: HYDRAULIC
TELESCOPING 7339464

RACK ASSEMBLY: 7339494

WHEELS: SINGLE, 16.00 x 6.50 12331691

TIRES: TRACTION TREAD, TUBELESS
LT235 85RIG LOADRANGE E CLASS 2A

BRAKES:
PARKING AND HYDRAULIC INSTL 11686109
ACTUATOR 11675013
BRAKE ASSY. RH 11686238-2
LH 11686238-1

MAXIMUM TOWING SPEED:
LOADED 30 MPH
HIGHWAY 55 MPH

TIE DOWNS/LIFTING EYES:
(MIL-STD-209) 12313041
FRONT CORNERS, TWO
REAR CORNERS, TWO

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

© MS PART NO. MS52164-1 | ENGINEERING DRAWING NO. 8750053

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY – AT Other Cust		TRAILER CARGO: TACTICAL 3/4 TON, 2 WHEEL, M101A2	MS52164(AT)
PROCUREMENT SPECIFICATION MIL-T-10579	SUPERSEDES:		SHEET | OF |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

DD FORM 672-1 LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 2330-A950

APPROVED 31 DEC 64 REVISED (A) 14 JUL 78 (B) 15 JAN 85 (C) 27 NOV 86

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.