
MS9437 (ASG)

FED SUP CLASS 5306

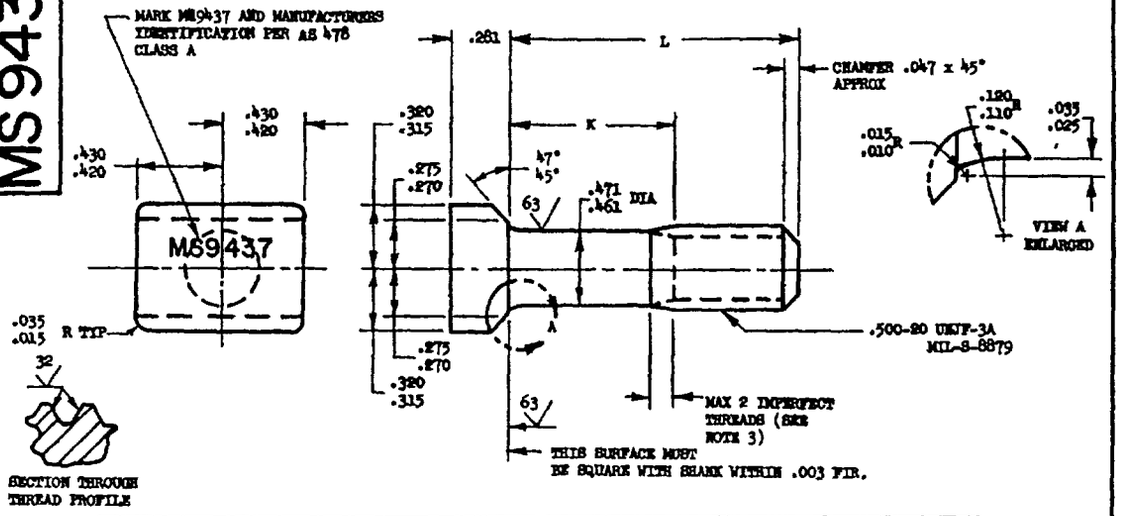

PART NUMBER	L	K	APPROX WEIGHT LB/100	PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9437-05	.875	.155- .175	8.41				
MS9437-06	.938	.155- .175	8.71	MS9437-31	3.250	1.940-2.000	19.89
MS9437-07	1.000	.155- .175	9.01	MS9437-32	3.375	2.065-2.125	20.50
MS9437-08	1.062	.155- .175	9.32	MS9437-33	3.500	2.190-2.250	21.10
MS9437-09	1.125	.155- .175	9.62	MS9437-34	3.625	2.315-2.375	21.70
MS9437-10	1.188	.155- .175	9.92	MS9437-35	3.750	2.440-2.500	22.31
MS9437-11	1.250	.155- .175	10.22	MS9437-36	3.875	2.565-2.625	22.91
MS9437-12	1.312	.155- .175	10.53	MS9437-37	4.000	2.690-2.750	23.52
MS9437-13	1.375	.155- .175	10.83	MS9437-38	4.125	2.815-2.875	24.12
MS9437-14	1.438	.155- .175	11.13	MS9437-39	4.250	2.940-3.000	24.72
MS9437-15	1.500	.190- .250	11.43	MS9437-40	4.375	3.065-3.125	25.33
MS9437-16	1.562	.252- .312	11.73	MS9437-41	4.500	3 190-3.250	25.93
MS9437-17	1.625	.315- .375	12.04	MS9437-42	4.625	3.315-3.375	26.54
MS9437-18	1.688	.378- .438	12.34	MS9437-43	4.750	3.440-3.500	27.14
MS9437-19	1.750	.440- .500	12.64	MS9437-44	4.875	3.565-3.625	27.75
MS9437-20	1.875	.565- .625	13.24	MS9437-45	5.000	3.690-3.750	28.35
MS9437-21	2.000	.690- .750	13.85	MS9437-46	5.125	3.815-3.875	28.95
MS9437-22	2.125	.815- .875	14.45	MS9437-47	5.250	3.940-4.000	29.56
MS9437-23	2.250	.940-1.000	15.06	MS9437-48	5.375	4.065-4.125	30.16
MS9437-24	2.375	1.065-1.125	15.66	MS9437-49	5.500	4.190-4.250	30.77
MS9437-25	2.500	1.190-1.250	16.27	MS9437-50	5.625	4.315-4.375	31.37
MS9437-26	2.625	1.315-1.375	16.87	MS9437-51	5.750	4.440-4.500	31.98
MS9437-27	2.750	1.440-1.500	17.47	MS9437-52	5.875	4.565-4.625	32.58
MS9437-28	2.875	1.565-1.625	18.08	MS9437-53	6.000	4.690-4.750	33.18
MS9437-29	3.000	1.690-1.750	18.68				
MS9437-30	3.125	1.815-1.875	19.29				

1. SHANK SHALL BE STRAIGHT WITHIN .003 FIR PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. INCOMPLETE THREADS NOT TO ENTER THE FILLET AREA.
4. HEAD TO SHANK FILLET SHALL BE COLD ROLLED.
5. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5735
6. SURFACE ROUGHNESS: AS 291, UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD
7. MANUFACTURING SPECIFICATION: AMS 7478 EXCEPT HEAD MUST BE UPSET.
8. PART SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
9. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
10. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES, LINEAR DIMENSIONS ± .010,
11. DO NOT USE UNASSIGNED PART NUMBERS.

AS &.AMS ARE SAE PUBLICATIONS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 21 DEC 62 REVISED

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Department of the ... and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable

P.A. USAF - AFSC	TITLE	MILITARY STANDARD
Other Cust NAVY - BEP	BOLT, TEE HEAD - AMS 5735, CHAMFERED, .500-20 UNJF-3A	MS9437 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 NOV 65 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:17Z
Check the source to verify that this is the current version before use.