
MS9750 (ASG)

FED SUP CLASS 5306

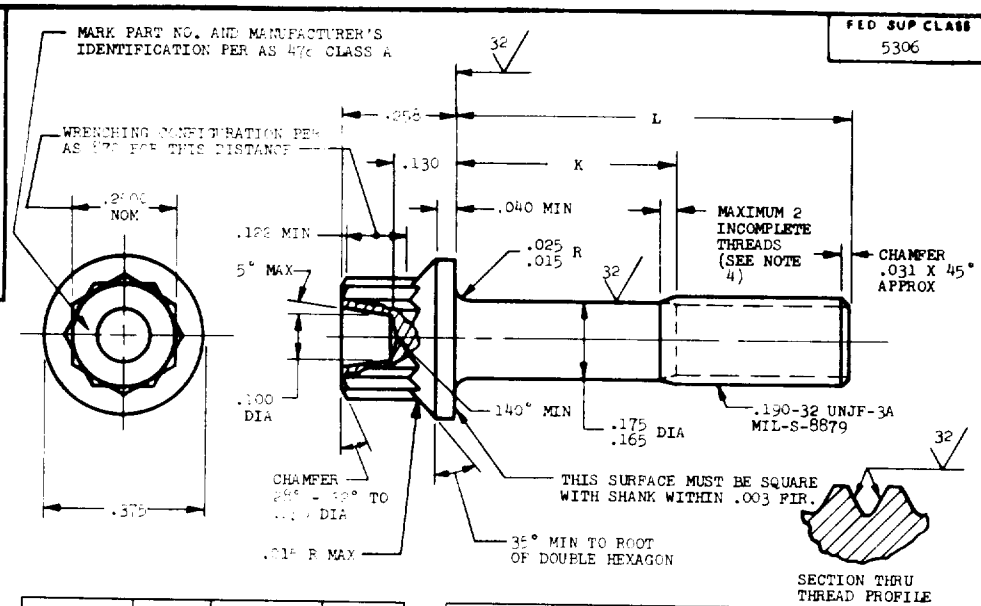

PART NO.	L	K	APPROX WEIGHT LB/100
MS9750-03	.312	.072-.092	.393
MS9750-04	.375	.072-.092	.413
MS9750-05	.438	.072-.092	.438
MS9750-06	.500	.072-.092	.460
MS9750-07	.562	.072-.092	.483
MS9750-08	.625	.072-.092	.508
MS9750-09	.688	.072-.092	.528
MS9750-10	.750	.072-.092	.550
MS9750-11	.810	.128-.148	.573
MS9750-12	.87[illegible]	.185-.205	.595
MS9750-13	.938	.243-.263	.618
MS9750-14	1.000	.310-.370	.640
MS9750-15	1.062	.378-.438	.663
MS9750-16	1.125	.436-.496	.685
MS9750-17	1.188	.496-.556	.708
MS9750-18	1.250	.560-.620	.730
MS9750-19	1.312	.622-.682	.753
MS9750-20	1.375	.684-.744	.775
MS9750-21	1.438	.746-.806	.798
MS9750-22	1.500	.810-.870	.820
MS9750-23	1.562	.872-.932	.843

PART NO.	L	K	APPROX WEIGHT LB/100
MS9750-24	1.625	.935-.995	.865
MS9750-25	1.688	.998-1.058	.888
MS9750-26	1.750	1.060-1.120	.910
MS9750-27	1.812	1.122-1.182	.933
MS9750-28	1.875	1.185-1.245	.955
MS9750-29	2.000	1.310-1.370	1.000
MS9750-30	2.125	1.435-1.495	1.045
MS9750-31	2.250	1.560-1.620	1.090
MS9750-32	2.375	1.685-1.745	1.135
MS9750-33	2.500	1.810-1.870	1.180
MS9750-34	2.625	1.935-1.995	1.225
MS9750-35	2.750	2.060-2.120	1.270
MS9750-36	2.875	2.185-2.245	1.315
MS9750-37	3.000	2.310-2.370	1.360
MS9750-38	3.125	2.435-2.495	1.405
MS9750-39	3.250	2.560-2.620	1.450
MS9750-40	3.375	2.685-2.745	1.495
MS9750-41	3.500	2.810-2.870	1.540
MS9750-42	3.625	2.935-2.995	1.585
MS9750-43	3.750	3.060-3.120	1.630
MS9750-44	3.875	3.185-3.245	1.675

1. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF BOLT LENGTH.
2. THE RUNOUT OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .004 FIR.
3. THE RUNOUT OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .006 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: TITANIUM AMS 4967.
6. HARDNESS: ROCKWELL C36-42.
7. MANUFACTURING SPECIFICATION: AMS 7461, EXCEPT MATERIAL AS NOTED.
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

APPROVED 3 Mar 69 REVISED

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities: USAF - 82, 85

P.A. USAF - 11 / Other Cust Navy - 43	TITLE: BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, PD SHANK, TITANIUM AMS 4967, .190-32 UNJF-3A	MILITARY STANDARD MS9750 (ASG)
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5965 - 807[illegible]

☆ U. S. GOVERNMENT PRINTING OFFICE 1969-341-538/A-5345

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:24Z
Check the source to verify that this is the current version before use.