
MS9760 (ASG)

FED SUP CLASS 5306

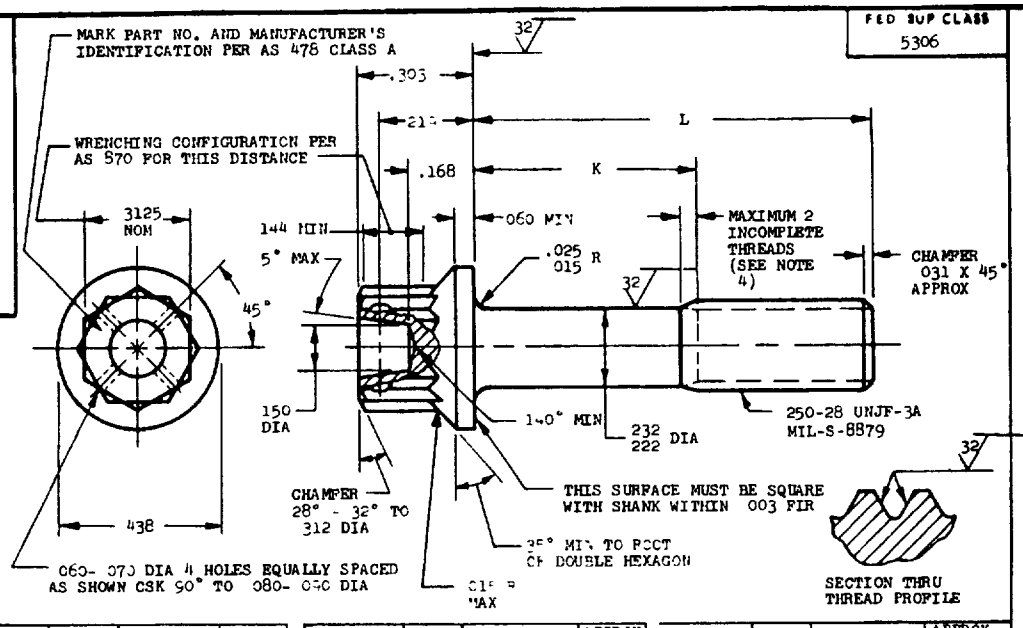

PART NO	L	K	APPROX WEIGHT LB/100
MS9760-04	.375	.079- .099	71
MS9760-05	.438	.079- .099	77
MS9760-06	.500	.079- .099	78
MS9760-07	.562	.079- .099	84
MS9760-08	.625	.079- .099	89
MS9760-09	.688	.079- .099	91
MS9760-10	.750	.079- .099	97
MS9760-11	.812	.079- .099	99
MS9760-12	.87	.079- .125	1 03
MS9760-13	.938	.125- .188	1 07
MS9760-14	1.000	.190- 2 0	1 11
MS9760-15	1.062	.252- .312	1 15
MS9760-16	1.125	.315- .375	1 19
MS9760-17	1.188	.378- .438	1 23
MS9760-18	1.250	.440- .500	1 27
MS9760-19	1.312	.502- .562	1 31
MS9760-20	1.375	.565- .625	1 35
MS9760-21	1.438	.628- .688	1 39
MS9760-22	1.500	.690- .750	1 43
MS9760-23	1.562	.753- .812	1 47
MS9760-24	1.625	.81 - .87	1 51

PART NO	L	F	APPROX WEIGHT LB/100
MS9760-2	1.688	.878- .938	1 55
MS9760-26	1.750	.940-1.000	1 59
MS9760-27	1.812	1.002-1.062	1 63
MS9760-28	1.875	1.065-1.125	1 67
MS9760-29	1.938	1.127-1.188	1 71
MS9760-30	2.000	1.190-1.250	1 75
MS9760-31	2.125	1.315-1.375	1 83
MS9760-32	2.250	1.440-1.500	1 91
MS9760-33	2.375	1.565-1.625	1 99
MS9760-34	2.500	1.690-1.750	2 07
MS9760-35	2.625	1.815-1.875	2 15
MS9760-36	2.750	1.940-2.000	2 23
MS9760-37	2.875	2.065-2.125	2 31
MS9760-38	3.000	2.190-2.250	2 39
MS9760-39	3.125	2.315-2.375	2 47
MS9760-40	3.250	2.440-2.500	2 55
MS9760-41	3.375	2.565-2.625	2 63
MS9760-42	3.500	2.690-2.750	2 71
MS9760-43	3.625	2.815-2.875	2 79
MS9760-44	3.750	2.940-3.000	2 87
MS9760-45	3.875	3.065-3.125	2 95
MS9760-46	4.000	3.190-3.250	3 03

PART NO	L	F	APPROX WEIGHT LB/100
MS9760-46	4.125	3.315-3.375	3 12
MS9760-47	4.250	3.440-3.500	3 20
MS9760-48	4.375	3.565-3.625	3 28
MS9760-49	4.500	3.690-3.750	3 36
MS9760-50	4.625	3.815-3.875	3 44
MS9760-51	4.750	3.940-4.000	3 52
MS9760-52	4.875	4.065-4.125	3 60
MS9760-53	5.000	4.190-4.250	3 68
MS9760-54	5.125	4.315-4.375	3 76
MS9760-55	5.250	4.440-4.500	3 84
MS9760-56	5.375	4.565-4.625	3 92
MS9760-57	5.500	4.690-4.750	4 00
MS9760-58	5.625	4.815-4.875	4 09
MS9760-59	5.750	4.940-5.000	4 16
MS9760-60	5.875	5.065-5.125	4 24
MS9760-61	6.000	5.190-5.250	4 32

1. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF BOLT LENGTH
2. THE RUNOUT OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
3. THE RUNOUT OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .007 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET
5. MATERIAL TITANIUM AMS 4967
6. HARDNESS ROCKWELL C36-42.
7. MANUFACTURING SPECIFICATION AMS 7461, EXCEPT MATERIAL AS NOTED
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2644
9. SURFACE TEXTURE USAS B46 1-1962 UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD
10. BREAK SHARP EDGES .003- .015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ±2°
12. DO NOT USE UNASSIGNED PART NUMBERS

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV

APPROVED 3 Mar 69 REVISED

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities AF - 82, 85

P.A. JSAF - 11	TITLE	MILITARY STANDARD
Other Cust Navy - AS	BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, PD SHANK, TITANIUM AMS 4967, 250-28 UNJF-3A	MS9760 (ASG)
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 1 OF 1

DD FORM 1426 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:24Z
Check the source to verify that this is the current version before use.