
MS9785

FED SUP CLASS 5306

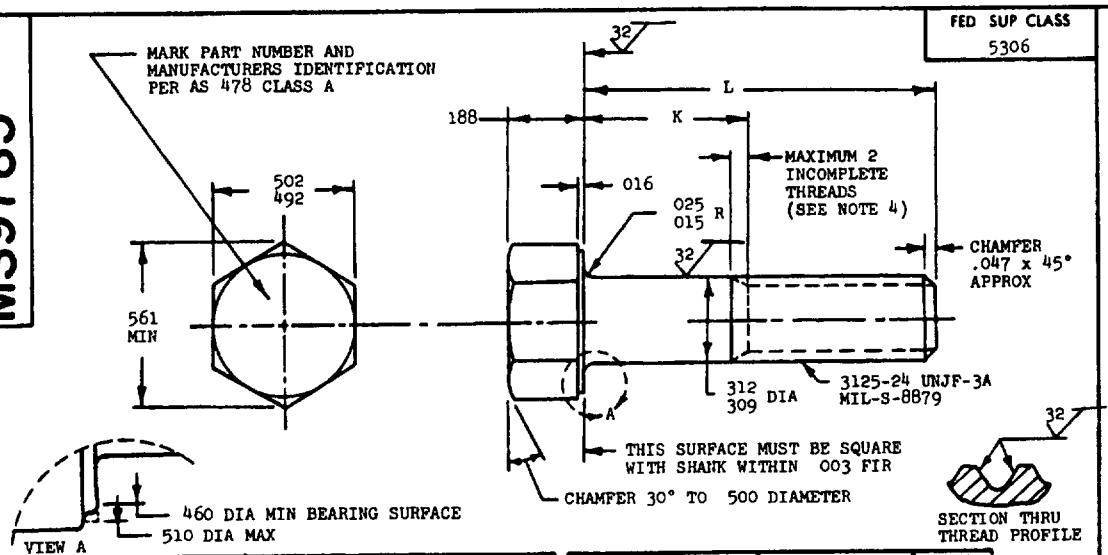

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9785-13	1 062	128- .188	3 35
MS9785-14	1 125	190- 250	3 49
MS9785-15	1 188	252- 312	3 62
MS9785-16	1 250	315- 375	3 76
MS9785-17	1 312	378- 438	3 88
MS9785-18	1 375	.440- 500	4 02
MS9785-19	1 438	502- 562	4 15
MS9785-20	1 500	.565- 625	4 29
MS9785-21	1.562	628- 688	4 42
MS9785-22	1.625	690- 750	4 56
MS9785-23	1 688	752- 812	4 69
MS9785-24	1 750	815- 875	4 82
MS9785-25	1 812	878- 938	4 96
MS9785-26	1 875	940-1 000	5 09
MS9785-27	1 938	1 002-1 062	5 22
MS9785-28	2 000	1.065-1 125	5 35
MS9785-29	2 125	1 190-1 250	5 62
MS9785-30	2 250	1 315-1 375	5 89

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9785-31	2 375	1 440-1 500	6 15
MS9785-32	2 500	1 565-1 625	6 42
MS9785-33	2 625	1 690-1 750	6 69
MS9785-34	2.750	1 815-1 875	6 96
MS9785-35	2 875	1 940-2 000	7 23
MS9785-36	3 000	2 065-2 125	7 49
MS9785-37	3 125	2 190-2 250	7 76
MS9785-38	3 250	2 315-2 375	8 03
MS9785-39	3 375	2 440-2 500	8 29
MS9785-40	3 500	2 565-2 625	8 56
MS9785-41	3 625	2 690-2 750	8 82
MS9785-42	3 750	2 815-2 875	9 09
MS9785-43	3 875	2 940-3 000	9 36
MS9785-44	4 000	3 065-3 125	9 62
MS9785-45	4 125	3 190-3 250	9 89
MS9785-46	4 250	3 315-3 375	10 16
MS9785-47	4 375	3 440-3 500	10 42
MS9785-48	4 500	3 565-3 625	10 69
MS9785-49	4 625	3 690-3 750	10 95
MS9785-50	4 750	3 815-3 875	11 23
MS9785-51	4 875	3 940-4 000	11 50
MS9785-52	5 000	4 065-4 125	11 76
MS9785-53	5 125	4 190-4.250	12 03
MS9785-54	5 250	4 315-4 375	12 30
MS9785-55	5 375	4.440-4 500	12 56
MS9785-56	5 500	4 565-4 625	12 83
MS9785-57	5 625	4 690-4 750	13 09
MS9785-58	5 750	4 815-4 875	13 36
MS9785-59	5 875	4 940-5 000	13 63
MS9785-60	6 000	5 065-5 125	13 89

1 SHANK SHALL BE STRAIGHT WITHIN 003 TOTAL PER INCH OF BOLT LENGTH
2 THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN 006 FIR
3 THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN 015 FIR
4 INCOMPLETE THREADS NOT TO ENTER FILLET
5 MATERIAL CORROSION RESISTANT STEEL AMS 5643
6 HARDNESS: ROCKWELL C32-38
7 MANUFACTURING SPECIFICATION AMS 7474
8 FLUORESCENT PENETRANT INSPECTION PER AMS 2645
9 SURFACE TEXTURE USAS B46 1-1962 UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD
10 BREAK SHARP EDGES 003- 015 UNLESS OTHERWISE SPECIFIED
11 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES LINEAR DIMENSIONS ± 010, ANGULAR DIMENSIONS ±5°
12 DO NOT USE UNASSIGNED PART NUMBERS

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV

APPROVED 11 MAR 70 REVISED

P.A USAF-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ARMY-AV NAVY-AS	ASCC AIR STD 17/2	BOLT, MACHINE - HEXAGON HEAD, FULL SHANK, AMS 5643, 3125-24 UNJF-3A	MS9785
PROCUREMENT SPECIFICATION NONE		SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Review activities USAF - 82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:25Z
Check the source to verify that this is the current version before use.