
MS9913 (ASG)

FED. SUP CLASS
5305

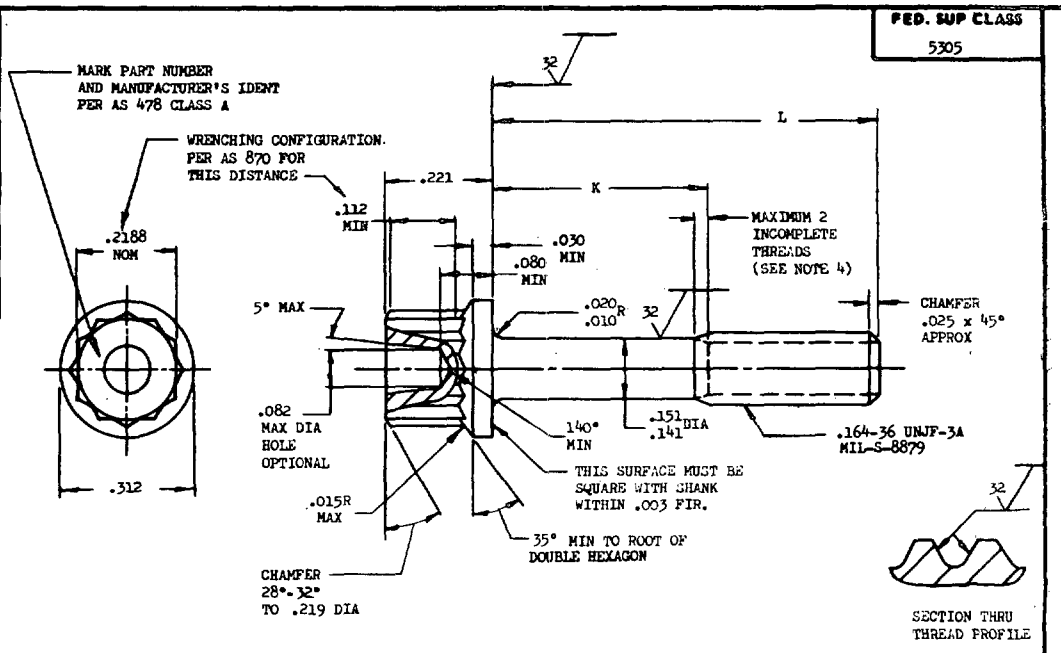

PART NO.	L	K	APPROX WEIGHT LB/100
MS9913-02	.250	.062- .082	.419
MS9913-03	.312	.062- .082	.448
MS9913-04	.375	.062- .082	.478
MS9913-05	.438	.062- .082	.498
MS9913-06	.500	.062- .082	.537
MS9913-07	.562	.062- .082	.567
MS9913-08	.625	.062- .082	.596
MS9913-09	.688	.062- .110	.626
MS9913-10	.750	.112- .172	.655
MS9913-11	.812	.174- .234	.685
MS9913-12	.875	.237- .297	.715
MS9913-13	.938	.300- .360	.744
MS9913-14	1.000	.362- .422	.774
MS9913-15	1.062	.424- .484	.804

PART NO.	L	K	APPROX WEIGHT LB/100
MS9913-16	1.125	.487- .547	.833
MS9913-17	1.188	.550- .610	.863
MS9913-18	1.250	.612- .672	.892
MS9913-19	1.312	.674- .734	.922
MS9913-20	1.375	.737- .797	.951
MS9913-21	1.438	.800- .860	.981
MS9913-22	1.500	.862- .922	1.010
MS9913-23	1.562	.924- .984	1.040
MS9913-24	1.625	.987-1.047	1.069
MS9913-25	1.688	1.050-1.110	1.099
MS9913-26	1.750	1.112-1.172	1.129
MS9913-27	1.812	1.174-1.234	1.158
MS9913-28	1.875	1.237-1.297	1.188
MS9913-29	1.938	1.300-1.360	1.218
MS9913-30	2.000	1.362-1.422	1.247

1. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF SCREW LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .005 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6322.
6. HARDNESS: ROCKWELL C26-32.
7. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
8. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD SHALL BE UPSET.
9. HEAD TO SHANK FILLET SHALL BE COLD WORKED.
10. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
11. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
12. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
13. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
14. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 15 Aug 69 REVISED

Review activities: USAF - 82,85

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P.A. USAF - 11 Other Cust Navy - AS	TITLE SCREW, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, PD SHANK, STEEL AMS 6322, CADMIUM PLATED, .164-36 UNJF-3A	MILITARY STANDARD MS9913 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination)
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1969-393-065/S1748

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:27Z
Check the source to verify that this is the current version before use.