MS9915 (ASG)

FED. SUP CLASS
5306

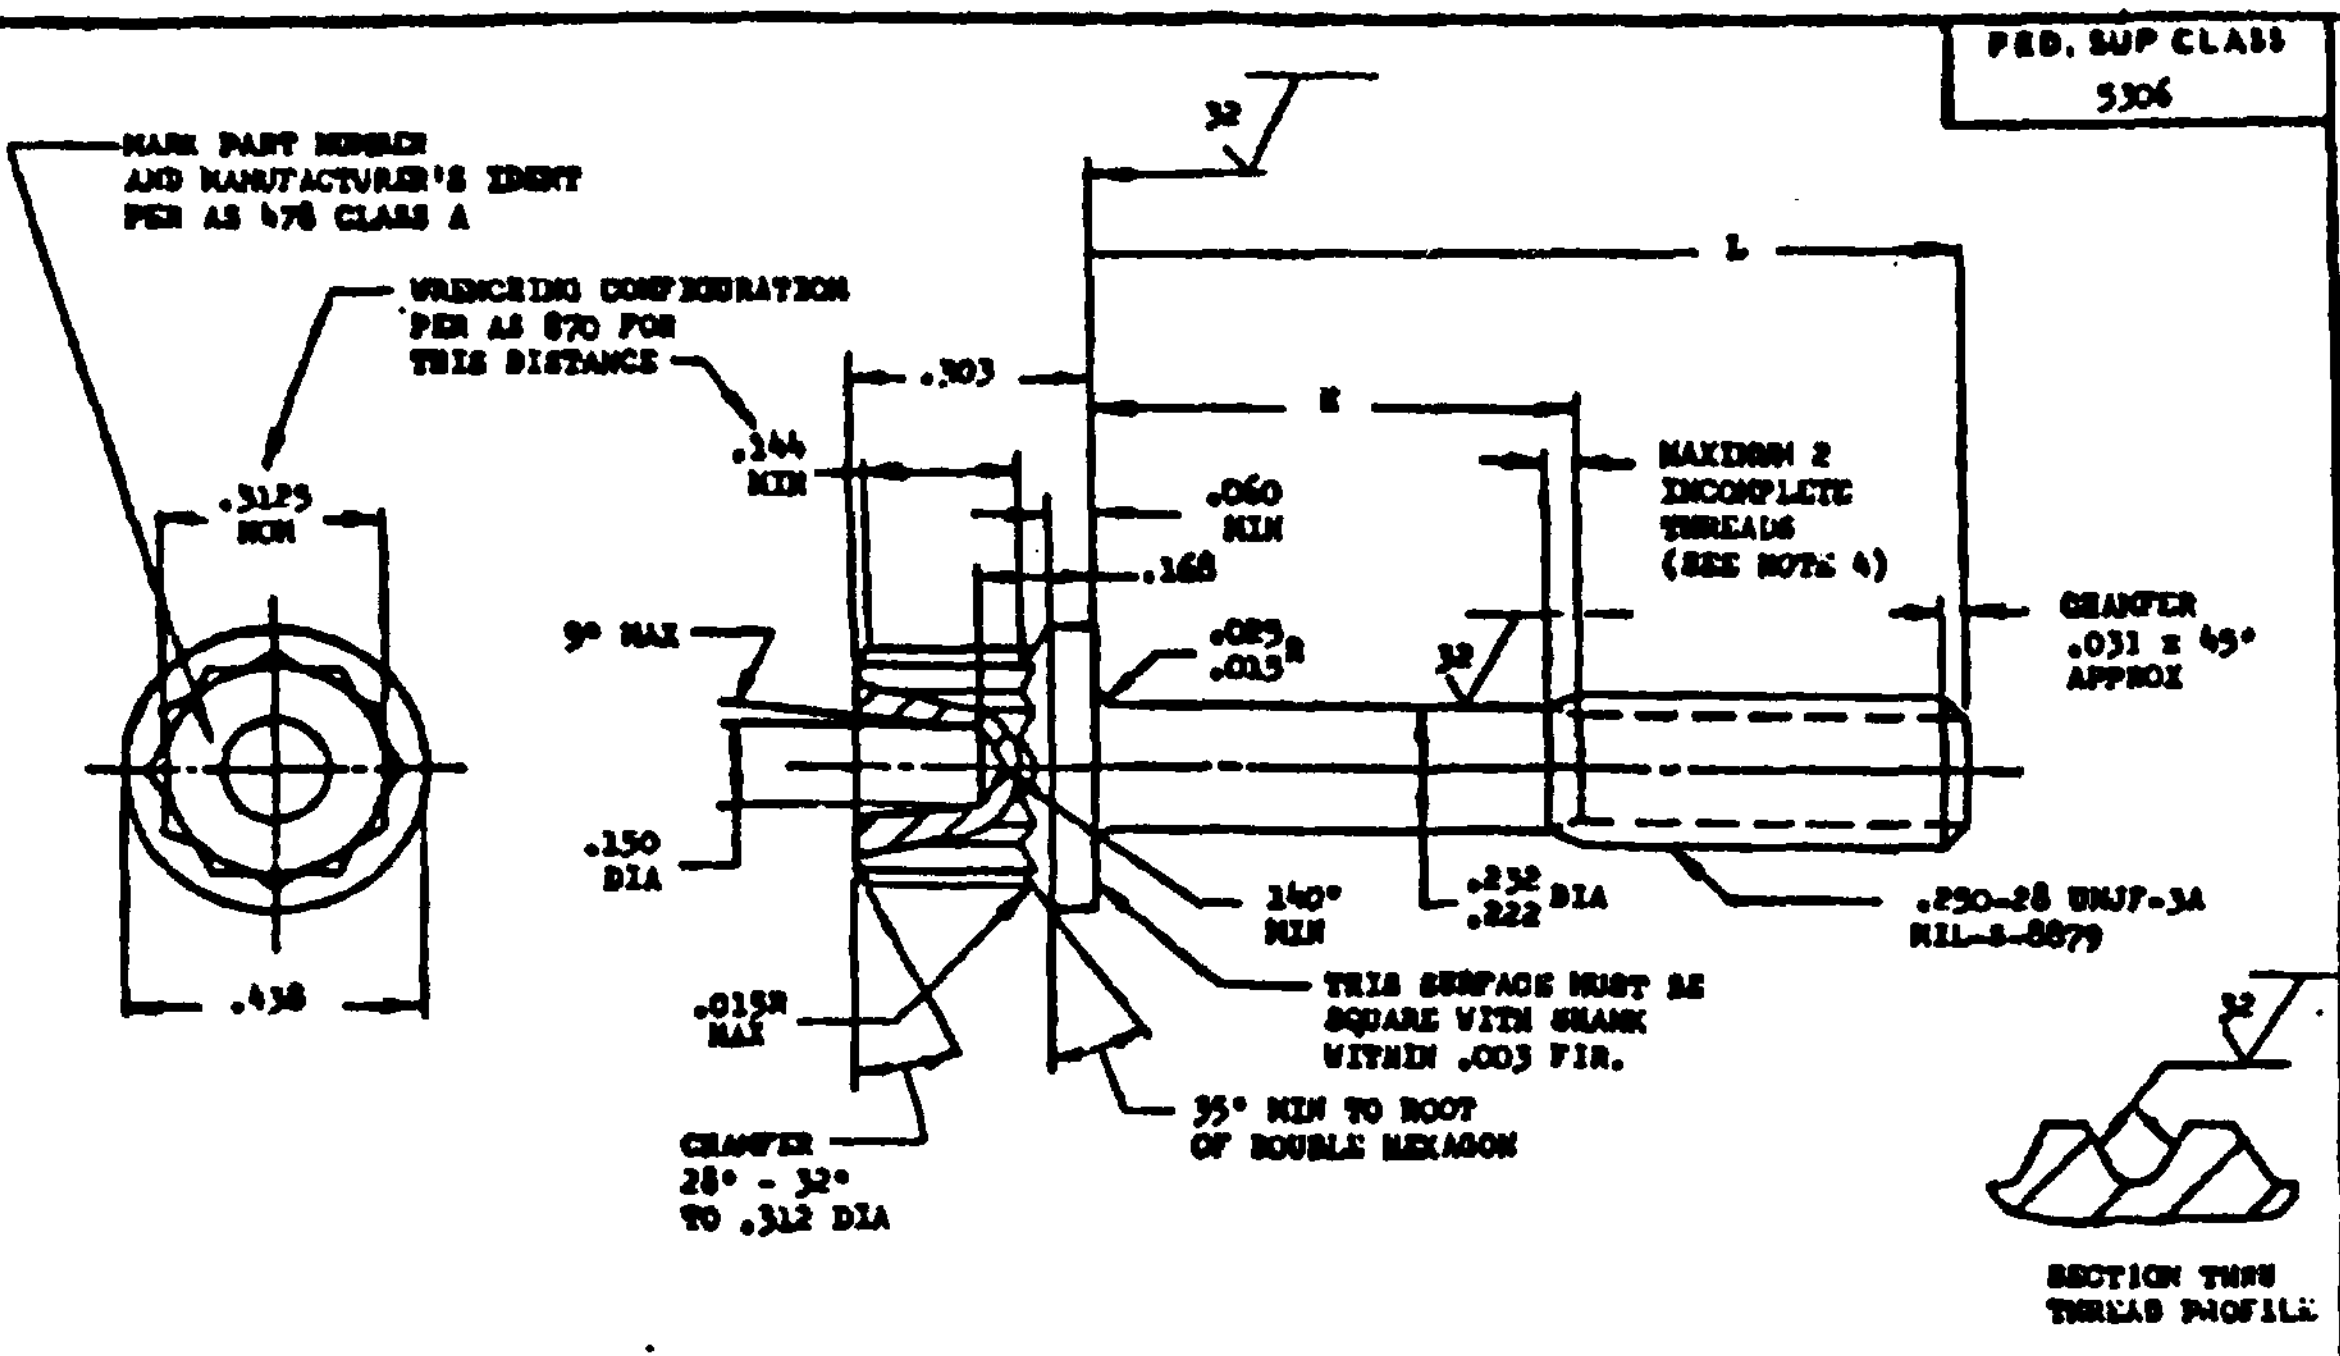

MARK PART NUMBER AND MANUFACTURER'S IDENT PER AS 478 CLASS A
WRENCHING CONFIGURATION PER AS 870 FOR THIS DISTANCE
.3125 MIN
.438
.144 MIN
.303
.060 MIN
.168
9° MAX
.085 R
.015
.150 DIA
.015R MAX
CHAMFER 28° - 32° TO .312 DIA
140° MIN
THIS SURFACE MUST BE SQUARE WITH SHANK WITHIN .003 FIR.
35° MIN TO ROOT OF DOUBLE HEXAGON
.232 .222 DIA
32
L
K
MAXIMUM 2 INCOMPLETE THREADS (SEE NOTE 4)
CHAMFER .031 x 45° APPROX
.250-28 UNJF-3A MIL-S-8879
SECTION THRU THREAD PROFILE

PART NO.	L	K	APPROX WEIGHT LB/100
MS9915-04	.375	.079- .099	1.23
MS9915-05	.438	.079- .099	1.30
MS9915-06	.500	.079- .099	1.37
MS9915-07	.562	.079- .099	1.44
MS9915-08	.625	.079- .099	1.51
MS9915-09	.688	.079- .099	1.58
MS9915-10	.750	.079- .099	1.66
MS9915-11	.812	.079- .099	1.73
MS9915-12	.875	.079- .125	1.80
MS9915-13	.938	.128- .188	1.87
MS9915-14	1.000	.190- .250	1.94
MS9915-15	1.062	.252- .312	2.01
MS9915-16	1.125	.315- .375	2.08
MS9915-17	1.188	.378- .438	2.16
MS9915-18	1.250	.440- .500	2.23
MS9915-19	1.312	.502- .562	2.30
MS9915-20	1.375	.565- .625	2.37
MS9915-21	1.438	.628- .688	2.44
MS9915-22	1.500	.690- .750	2.51
MS9915-23	1.562	.752- .812	2.58
MS9915-24	1.625	.815- .875	2.66
MS9915-25	1.688	.878- .938	2.73
MS9915-26	1.750	.940-1.000	2.80
MS9915-27	1.812	1.002-1.062	2.87
MS9915-28	1.875	1.065-1.125	2.94
MS9915-29	1.938	1.128-1.188	3.01
MS9915-30	2.000	1.190-1.250	3.08
MS9915-31	2.125	1.315-1.375	3.23
MS9915-32	2.250	1.440-1.500	3.37
MS9915-33	2.375	1.565-1.625	3.51
MS9915-34	2.500	1.690-1.750	3.66
MS9915-35	2.625	1.815-1.875	3.80
MS9915-36	2.750	1.940-2.000	3.94
MS9915-37	2.875	2.065-2.125	4.08
MS9915-38	3.000	2.190-2.250	4.22
MS9915-39	3.125	2.315-2.375	4.37
MS9915-40	3.250	2.440-2.500	4.52
MS9915-41	3.375	2.565-2.625	4.66
MS9915-42	3.500	2.690-2.750	4.80
MS9915-43	3.625	2.815-2.875	4.95
MS9915-44	3.750	2.940-3.000	5.09
MS9915-45	3.875	3.065-3.125	5.23
MS9915-46	4.000	3.190-3.250	5.37
MS9915-47	4.125	3.315-3.375	5.52
MS9915-48	4.250	3.440-3.500	5.66
MS9915-49	4.375	3.565-3.625	5.80
MS9915-50	4.500	3.690-3.750	5.95
MS9915-51	4.625	3.815-3.875	6.10
MS9915-52	4.750	3.940-4.000	6.24
MS9915-53	4.875	4.065-4.125	6.37
MS9915-54	5.000	4.190-4.250	6.51
MS9915-55	5.125	4.315-4.375	6.66
MS9915-56	5.250	4.440-4.500	6.80
MS9915-57	5.375	4.565-4.625	6.94
MS9915-58	5.500	4.690-4.750	7.09
MS9915-59	5.625	4.815-4.875	7.23
MS9915-60	5.750	4.940-5.000	7.37
MS9915-61	5.875	5.065-5.125	7.51
MS9915-62	6.000	5.190-5.250	7.66

1. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .007 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6322.
6. HARDNESS: ROCKWELL C26-32.
7. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
8. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD SHALL BE UPSET.
9. HEAD TO SHANK FILLET SHALL BE COLD WORKED.
10. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
11. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
12. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
13. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
14. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 15 Aug 69 REVISED

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities:
USAF - 80, 85

P.A. -USAF - 11 Other Cust Navy - AS	TITLE BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, PD SHANK, STEEL AMS 6322, CADMIUM PLATED, .250-28 UNJF-3A	MILITARY STANDARD MS9915 (ASG)
PROCUREMENT SPECIFICATION NAS	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 62 672-1 (Limited coordination)
ASG use only