INCH-POUND

MIL-C-52765E(ME)
13 September 1990
SUPERSEDING
MIL-C-52765D(ME)
15 August 1985

MILITARY SPECIFICATION

CAMOUFLAGE SCREENING SUPPORT SYSTEMS

This specification is approved for use within the USA Belvoir Research, Development and Engineering Center of the Army, and is available for use by all Departments and Agencies of the Depatrtment of Defense.

1. SCOPE

1.1 Scope. This specifiecation covers a support system completer with components and carrying case used with the woodland, snow, or desert lightweight synthetic camouflage screen system.

1.2 Classification. The camouflage support system covered by this specification will be the following classes, as specified (see 6.2):

Type I - Support system with aluminum pole.
Type II - Support system with plastic pole.
Subtype A - Support system with fiberglass reinforced plastic (FRP) batten spreader.
Subtype B - Support system with thermoplastic batten spreader.
Class 1 - Woodland/Desert
Class 2 - Snow

1.2.1 Individual compponents. When specified (see 6.2), the individual components will be one or more of the assembly components specified in 3.1.2.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should addressed to : USA Belvoir Research Development and Engineering Center, ATTN: STRBE-TSE, Fort Belvior, VA 22060-5606 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1080

DISTRUBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications and Standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issue of these documents arethoselsted in the issue of the Department of Defense Irdex of Specifications and Standards (DODISS) and thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

L-P-378	- Plastic Sheet and Strip, thin Gauge, Polyolefin.
QQ-S-781	- Strapping, steel, and seals.
PPP-B-601	- Boxes, Wood, Cleated-Pywood
PPP-B-636	- Boxes, Shipping, Fiberboard
PPP-S-760	- Strapping, Nonmetallic (and connectors).

STANDARDS

FEDERAL

FED-STD-141	- Paint, Varnish, Laquer, and Reated Materials: Methods for Testing of.
FED-STD-595	- colors.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.

(Unless otherwise indicated, copies of federal and military standards are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government drawings. The followijng other Government drawings form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those in effect on the date of the solicitation.

DRAWINGS

M E

13226E1232	- Resin, Thermoplastic, PoLyethylae Terephthalate (PET).
13227EO131	- cloth, vinyl, Nylon.
13227EO132	- Pole, Aluminum, Support.
13227EO133	- Spreader Adapter, Assembly.
13227EO134	- Pole, Plastic, Support.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

13227E0135 - Batten, Spreader.
13227E0136 - Stake, Anchor, Class 1.
13227E0137 - Case, Carrying, Camouflage Screening Support Systems.
13227E0140 - Resin, Thermoplastic, Polyphenylene Oxide, Plastic.
13227E0141 - Stake, Anchor, Class 2.

(Copies of drawings, publications, and other Governmentdocuments required by contractors in connection with specific acquisition functions should be obtained from the USA Belvoir Research, Developmetn and Engineering Center, ATTN: STRBE-JD, Fort Belvoir, VA 22060-5606.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitaiton. Unless otherwise specified, the issues of documnts not tlisted in the DODISS are the issues of the document cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASIM)

B 557 - Tensions Wrought and Cast Aluminum and Magneisium Alloy Products.
D 256 - Impact Resistance of Plastics and Electrical Insulating Materials.
D 790 - Flexural Properties of Plastics and Electrical Insulating Materials.
D 2412 - External Loading Properties of Plastic Pipe by Parallel-Plate Loading.
D 2584 - Ignition Loss of Cured Reinforced Resins.
E 10 - Brinell Hardness of Metallic Materials, Test Methods for.

(Application for copies should be addressed to the American Society for Testing and materials, 1916 Race Street, Philadelphia, PA 19103.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION INC. AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., ATTN: Traffic Order Section, 2200 Mill Road, Alexandria, VA 22314.)

UNIFORM CLASSIFICATION COMMITTEE AGENT

Uniform Freight Classification Rules

Application for copies should be address to Uniform Classification Committee, ATTN: Tariff Publishing Officer, Room 1106, 222 S. Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

(Non-Government standards and aplications are normally available from the organizations Which prepare or which distrtibute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes Precedence. Nothing in this document, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The camouflage screening support shall be as hown on the drawings specified in 2.1.2 and as specified herein. The support system shalll be Provided in colors as specified in 3.7, 3.8-3.9.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prerscribed on the drawings to ensure correct fit, assembly, and operation of the camouflage screening support systems any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) Prepared by the contractor of obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting off icer or designated representative.

3.1.2 Assembly. The support assembly shall consist of the following components and shall have a total weight of more than 70 pounds for class 1, and 85 pounds for class 2:

a. Supprt poles, 12 each (type I or type II).
b. Batten spreaders, 18 ead (subtype A Or subtype B) .
c. Batten spreader adapters, 6 each.
d. Stakes, 18 each.
e. Case, 1 each.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.3 Material. Material shall be as specified herein and on the drawings. Materials not specified shall be selected by the contractor and shall be subject to all previsions of this specif ication.

3.3.1 Material deterioration and control. The camouflage screening support systems shall be fabricated from compatible materials,inherently corrosion and deterioration resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encounteredin any of the applicable storage and operating environments to which the camouflage screening support system may be exposed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

3.3.1.1 Identification of materials and finishes. the contractor shall identify the specific material, material finish or treatment for use with components and subcomponents, and shall make information available, upon request, to the contracting off icer or designated representative.

3.3.1.2 Flammability of materials and finishes. Materials and finishes selected for use shall be flame resistant and non-toxic.

3.3.2 Recovered materials. For the purpose of this requiremdnt, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of rw materials, as distingguished from virgin raw materials. The components, prieces and parts incorporated in the comouflabe screening support system may be newly tabricated from recovered materials to the maximum extent practicable, provided the camouflage screening support system produced meets all other requirements of this specification. Used, rebuildt or remanufatured components, pieces and parts shall not be incorporated in the camouflage screening support system.

3.4 Support poles.

3.4.1 Aluminum poles for type I support system. Aluminum support poles shall conform to applicabel drawings and as specified herein. Aluminum support poles shall be produced from aluminum tubing as specified on the applicable drawings, and shall meet the physical requirements specified in table I.

TABLE I. Physical requirements of alumimum pole.

Property	Units	Requirements
Tensile strength	psi	40 X 10³ min.
Yield strength	psi	35 X 10³ min.
Elongation	%	8
Hardness	Bhn*	95**

* Brinell hardness nuumber (Bhn)
** 500 gram 10mm diameter ball

3.4.1.1 Paint adhesion. When tested as specifiied in 4.5.2.1.1.2, the poles shall show no evidence of nonadhesion of paint of any area exceeding 0.125-inch average diameter, or more than one area exceeding 0.0625-inch average diameter, or more than five areas of any diameter.

3.4.2 Plastic roles for thpe II support systems. Plastic Support poles shall conform to applicable drawings and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T21:32Z
Check the source to verify that this is the currentversion before use.

3.4.2.1 Pole body. The plastic pole body material shall be as specified in the applicable drawings and shall meet the physical requirements as specified in table II.

TABLE II. Physical requirements of Plastic support pole body.

Property		Units	Requirements
Flexural strength	dry	psi	40 x 10^3 min
	wet	psi	35 x 10^3 min
Flexural modulus	dry	psi	2.25 x 10^6 min
	wet	psi	2.00 x 10^6 min
Crush strength		lb/ft	1.6 x 10^3 min
Glass content		%	50 min

3.4.2.2 Plastic pole assembly. Connector and end reinforcments, when applicable, shall be permanetly attached to the pole body. the method of attachmenbt shall meet the requirements specified herein.

3.4.3 Support pole, type I and type II.

3.4.3.1 Column load. When tested as specified in 4.5.2.1.3.1, a 4-section pole shall support a 300-pound axial load for 60 seconds.

3.4.3.2 Drop. When tested as specified in 4.5.2.1.3.2, the support poles shall sustain no damage which inhibits assembly or disassembly with a 1.568 OD/1.565 ID gauge. The type I support PolesShall show no slippage of the sleeve into the pole body more than 0.25-inch. The type II supprt pies shall shcw no evidence of fiberglass fibers exposed or protruding out of resin, failure of the joint section, chips more than 0.25-inch deep, or cracks in the pole body. Cracks which only appear to be superficial shall be sujected to the column load test specified in 4.5.2.1.3.1 to establish conformance of the pole. The Cracked joint shall be positioned near the Center of the column.

3.5 Batten spreader.

3.5.1 Fiberglass reinforced plastic (FRP) batten spreader (subtype A). The FRPbatten spreader shall vonform to the applicable drawings and as specified herein. The color pigment for class 2 batten spreaders shall be a white paste or pigment and shall be added to the resin mix not more than 8 parts nor less than 1 part per hundred of the base resin.

3.5.2 Thermoplastic batten spreader (subtype B). The termoplastic batten spreader shall confor to ht eapplicable drawings, and as specified herein.

3.5.3 Batten spreader, shbtype A and subtype B.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T21:32Z
Check the source to verify that this is the currentversion before use.

3.5.3.1 Stiffness Strength. When tested as specified in 4.5.2.2.1, the average deflection at 20 pounds shall be no less than 8 inches and not more than 13 inches, and no specimens shall break when loaded to 80 pounds. Breakage is defined as specimen rupture, i.e., a break typified by an abrupt change specimen configuration.

3.5.3.2 Impact. When tested as specified in 4.5.2.2.2, spreaders shall not crack or break. Surface chips and delamination at the location of impact are providing they do not exceed an arc length of 2 inches or 0.50-inch from the edge.

3.5.3.3 Residual deflection. When tested as specified in 4.5.2.3, the Highest point of residual deflection shall be not more than one inch between the flat surface and the bottOm of the batten.

3.5.3.4 Conditioned impact. When tested as specified in 4.5.2.2.4, the batten spreaders shall not crack or break. Surface tips and delamination at the location of impact are permissable providing they do not exceed an arc length of 2 inches or 0.50-inch from the edge.

3.6 Batten spreader adapter. The batten spreader adapter shall conform to the applicable drawings, and shall meet the physical requirements specified in table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

TABLE III. Physical requirements of batten spreader adapter.

Property	Units	Requirements
IZOD Impact (73 °F)	ft-lbs/ins	5.0 min
(-40 °F)	ft-lbs/ins	1.5 min
Flexural strength		
(dry)	psi	7,800 min
(wet)	psi	90% retention of dry strength
Flexural modulus		
(dry)	psi	325,000 min
(wet)	psi	90% retention of dry modulus

3.7 Stakes. The anchor stakes shall conform to the applicable drawings. The color of the anchor stakes for class support systems shall be in accordance with FED-STD-595, color no. 34079 and for class 2 color no. 37875.

3.8 Case. The case shall be as shown on the applicable drawings. The color of the case shall be in accordance with FED-STD-595, color no. 34087 for class 1, and color no. 37875 for class 2 support systems.

3.9 Treatment. The support poles, batten spreaders, and batten spreaders adapter shall be treated during preparation with pigment to provide coloration. Colors shall be in accordance with FED-STD-595, color no. 34079 for class 1 and color no. 37722 to 37875 for class 2 support systems.

3.10 Reliability. When specified (see 6.2), the reliability for completing a mission of 672 test cycles shall be 0.94 when the camouflage screening support system is tested as specified in 4.5.3.

3.11 Identification marking. The support assembly case shall be identified in accordance wiht MIL-STD-130 as indicated on the drawings and labelled for a "TWO SOLDIER CARRY" in accordance wiht MIL-STD-1472, 5.9.11.3.9.

3.12 Workmanship. The finished items shall be clean, free of burrs and sharp edges, smoothly finished shall not be broken or malformed, and shall conform to the standards specified in the appendix.

4. QUALITY ASSURANCE PROVISION

4.1 Responsibility for inspection. unless otherwise specified in the contract or purchase order, the contractor is responsible for the perfor4mance of alll inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

Government reserves the right to perform any of the inspections set forth in the specifications where such inspectionS are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specifiecation shall become a part of the contractors overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the resonsibility of ensuring that all products or supplies submittee to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to asertain conformance to requireements however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. The contractor is responsible for ensuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifictions and standards.

4.2 Classification of inspections. the inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c.Inspection of packaging (see 4.6).

4.3 First article inspection and testing.

4.3.1 Examination. The camouflage screening sypport systems shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The comouflage screening sypport systems shall be tested as specified in 4.5.2. Failure of any tst shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Unit of product. A unit of product for purpose of sampling shall bex an assembly of the support system, or an individual component, as applicable.

4.4.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105, tablE I and table II-A, inspection level II. Sampling for tests shall be in accordance with MIL-STD-105, table I and table II-A, inspection level S-2 .

4.4.3 Examination. Samples selected in accordance with 4.4.2 shall be examined for the defects specified in 4.5.1. Accept if zero defects are found, reject if one or more defects are found.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T21:32Z
Check the source to verify that this is the currentversion before use.

4.4.4 Tests. Samples selected in accordance with 4.4.2 shall be tested as specified in 4.5.2 through 4.5.2.l.3 and 4.5.2.2 through 4.5.2.2.2. Failure of any test shall be cause for rejection.

4.5 Inspection Procedure.

4.5.1 Examination. The camouflage screening support components shall be examined as hereing for the following defects:

Major

101. Dmensions not as specified (see 3.1.1).
102. Weight of support system not as specified (see 3.1.2).
103. Components missing, not as specifid, or damaged (see 3.1.2).
104. Material not as specified (see 3.3).
105. Materials are not resistant to corrosion or deterioration or not treated to be made resistant to corrosion or deterioration for the applicable storage and operating environment (see 3.3.1).
106. Contractor does not have documentation available for identification of material, material finishes, or treatment (see 3.3.1.1) .
107 l Used, rebuilt, or remanufactured comonents, pieces and parts incorporated in the camouflage screening suport system (see 3.3.2).
108. Construction of support poles not as specified (see 3.4.1).
109. Connector and end reinforcements, when applicable, not as specified (see 3.4.2.2).
110. FRP batten spreaders with blisters or delminations latger than 0.50-inch diameter, wrinkles, ripples, cracks, or loose fibers, or any other visible malformation which exceeds government-approved visual acceptance standards for batten spreaders (see 3.5).
111. Colors not as specified (see 3.7, 3.8, and 3.9).
112. Stakes not as specified (see 3.7).
113. Case not as specified (see 3.8).
114. Treatment not as specified (see 3.9).
115. Support poles do not fit together or disassemble as specified.
116. Spreader adapter nut and spreader adapter body are not compatible.
117. Spreader adapter nut does nut lock batten spreaders in position.
118. Spreader adapter nut does not unlock by hand.
119. Thermopastic batten spreaders with blisters or pores larger than 0.125-inch diameter, wrinkles, ripples, or cracks.
120. Any malformation which exceeds the standard specified in the appendix.

Minor

201. Identification marking missing, incorrect, or illegible (see 3.11).
202. Workmanship not as specifid (see 3.12).

4.5.2 Tests. Unless otherwise specified herein, test results for 4.5.2.1.1.1, 4.5.2.1.2.1, and 4.5.2.3 shall be the average of five specimens.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

4.5.2.1 Support Pole. The tests specified in 4.5.2.l.3.l and 4.5.2.l.3.2 may be conducted in any order.

4.5.2.1.1 Aluminum pole.

4.5.2.1.1 Pole body and sleeve. This test shall be conducted only on every fifth sample. The pole body and sleeve shall be tested as specified in table IV. Nonconformance to 3.4.1 shall constitute failure of this test.

TABLE Iv. Test for physical requirements of aluminum pole.

Property	ASTM test method	Requirement paragraph
Tensile strength	B 557	3.4.1
Yield strength	B 557	3.4.1
Elongation	B 557	3.4.1
Hardness	E 10	3.4.1

4.5.2.1.1.2 Adhesion of paint. The pole shall be tested for adhesion of paint in accordance with FED-STD-141, method 6301.1. Nonconformance to 3.4.1.1 Shall constitute failure of test.

4.5.2.1.2 Plastic pole.

4.5.2.1.2.1 Pole body. This test shall be conducted only on every fifth sample. The pole body shall be tested as specified in table V. Nonconformance to 3.4.2.1 constitute failure of this test.

TABLE V. Test for physical requirements of plastic support pole body.

Property	ASTM test method	Requirement paragraph
Flexural strength*	D 790	3.4.2.1
Flexural modulus*	D 790	3.4.2.1
Crush strength	D 2412	3.4.2.1
Glass content	D 2584	3.4.2.1

*Note: Pole body, tested concave side up. Width measures as chord of arc. Measure wet Strength within 12 hours after 3-hour boil,and after cooling for not less than 1 hour.

4.5.2.1.3 Support pole, type I and type II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

4.5.2.1.3.1 Column load. A 4-section pole shall be loaded as specified in figures 1 and 2. Once the load has been started the pole shall not be moved or adjusted. Nonconformance to 3.4.3.1 shall constitute failure of this test.

4.5.2.1.3.2 Drop.

4.5.2.1.3.2.1 Vertical single pole drop. The support pole shall be dropped vertically 10 times on each end onto a 0.75-inch thick steel plate laid flat from a height of 10 feet. The support pole shall be fuided to square impact with the steel plateby a steel rod or pipe with OD selected to provide a 0.125-inch diametral clearance on the ID of the connector sleeve. Nonconformance to 3.4.3.2 shall constitute failure of this test.

4.5.2.1.3.2.2 Single pole slant drop. The support pole shall be dropped so that the end strikes a 0.75-inch steel plate at approximately a 45-degree angle. The pole shall be dropped at a height so the striking end falls at least 4 feet. The pole shall not be guided in that the pole shall be unrestricted when it strikes the steel plate. The pole shall be droped three times on each end. After the first drop, the pole shall be rotated 120 degrees prior to each additional drop. Nonconformance to 3.4.3.2 shall constitute failure of this test.

4.5.2.2 Batten spreaders.

4.5.2.2.1 Stiffness and strenght. The batten spreader shall be loaded to 20 pounds and the amount of deflection meassured as shown in figure 3. After deflection is recorded, the batten spreader shall be loaded to 80 pounds for not less than 60 pounds. Nonconformance to 3.5.3.1 for either stiffness or strength shall constitute failure of this test.

4.5.2.2.2 Batten spreader impact test. The batten spreader shall be attached to a free falling weight by means of the spreader adapter body and nut. The test fixture shall be similar to figure 4, so that it will fall 6 feet and have an impact energy of not less than 120 foot pounds. The batten spreader shall be dropped on to a steel plate which allows the batten spreader to slide out and away from the test fixture. The cartaridge nut allow the bottom ofthe batten spreader hole to a come within 7 inches of the steel plate. After being dropped, the batten spreader shall be removed and inspected. Nonconformance to 3.5.3.2 shall constitute failure of this test.

4.5.2.2.3 Residual deflection. The batten spreader shall be bowed not less than 10inches, in a fixture similar to figure 5. The bowed batten spreader shall be conditioned at 140 ± 5 °F (60 ±3 °C) for not less than six hours, and then allowed to cool at room temperature for not less than two hours while Still bing bowed. After the two—hour cooling period, the batten spreader shall be removed from the fixture and placed on a flat surface with the extreme ends of the batten spreader resting on the flat surface. Nonconformance to 3.5.3.3 Shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

4.5.2.2.4 Conditioned impact. Condition the batten spreaders at -40 ±5 °F (-40 ±3 °C) and at that temperature subject the spreaders to the test spcified in 4.5.2.2.2. Nonconformance to 3.5.3.4 shall constitute failure of this test.

4.5.2.2.5 orders of testing. The batten Spreader impact test (see 4.5.2.2.2) shall be performed first. The stiffness and strength test (see 4.5.2.2.1) will then be performed on the same sample. The conditioned impact test (see 4.5.2.2.4) shall be performed on a separate sample and the residual deflection test (see 4.5.2.2.3) shall be performed on a separate sample.

4.5.2.3 Batten spreader adapter. Specimens of the material from which the batten spreader adapters are to be manufactured shall be tested as specified in table VI. Nonconformance to 3.6 shall constitute failure of this test.

4.5.3 Reliablility. Using the reliability specified in 3.10, the camouflage screening support system shall be tested as specified herein.

TABLE VI. Test for physical requirements of batten spreader adapter material.

Property	Condition	ASTM test method	Requirement paragraph
IZOD impact	73 °F -40 °F	D 256	3.6
Flexural strength		D 790	3.6
(dry)	73 °F		
(wet)	10 day soak at 150 °F in distilled water		
Flexural modulus		D 790	3.6
(dry)	73 °F		
(wet)	10 day soak at 150 °F in distilled water		

4.5.3.1 Failure definition. A failure is defined as any malfunction of the support system which the operator or crew cannot correct by repair or replacement action using maintenance tools, available spares, or the repair kit within 15 minutes and which cause or may cause:

a. Failure to commence operation, cessation of operation, or degradation of performance capability of system/subsystem below designated level.
b. Serious damage to system/subsystem by continued operation.
c. Serious personnel safety hazards.

4.5.3.2 Test procedure. For reliability purposes a test cycle is defined as unpacking, erecting, utilizing a camouflage screen module, disassembly and repacking a single suport system. A sample size of 6 support systems will be

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

employed for 2 test cycles/day each for 56 days resulting in a total of 672 test cycles for each type of support system specified (see 1.2 and 6.2).

4.5.3.3 Failure criteria. Nonconformance to 3.10 shall constitute failure of this test.

4.6 Inspection of packaging.

4.6.1 First article pack inscection.

4.6.1.1 Examination. The first article pack shall be examined for the applicable defects in 4.6.2.3.1 and 4.6.2.3.2. The presence of one or more defects shall be cause for rejecting the first article pack.

4.6.2 Quality conformance inspection of packaging.

4.6.2.1 Unit of product.

4.6.2.1.1 Camouflage support system assembly. For the purpose of inspection onlY, a completed unitized load of camouflage support system assemblies, that have been prepared for shipment, shall be considered an assembly unit of product.

4.6.2.1.2 Camouflaqe support system individual component. For the purpose of ispection only, a completed pack for a quantity of a single component, that has been prepared for shipment, Shall be considered an individual component unit of product for that component. A completed pack for a quantity of any other single component that has been prepared for shipment, shall be similarly considered.

4.6.2.2 Sampling. Sampling for examination shall be in acordance with MIL-STD-105, table I and table II-A.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the applicable defects listed in 4.6.2.3.1 and 4.6.2.3.2. Accept if zero defects are found and reject if one or more arefound. Special note: Acceptance criteria for workmanship standards in packaging shall conform to 30.6 of the aappendix and as referenced herein.

4.6.2.3.1 Camouflage support system assembly. Camouflage support system assemblies shall be examined for the following defects as specified for the dif ferent levels of packaging:

No.	Defect	A	B	C
119.	Components not positioned and contained with the furnished carrying case.	5.2.1.1	5.2.1.2	5.2.1.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

120.	Filled carrying case not placed inside polyethylene bag as specified.	5.2.1.1	5.2.1.2	
121.	polyethylene bag not as specified.	5.2.1.1	5.2.1.2	
122.	Bag not compressed around carrying case by vacuum as specified.	5.2.1.1	5.2.1.2	
123.	bag not properly heat sealed to retain vacuum (see 30.6.2).	5.2.1.1	5.2.1.2	
124.	Sealed bag containing the support system not placed in specified close-fitting box.	5.2.1.1	5.2.1.2	
125.	Close-fitting box not assembled and closed as specified (see 30.6.1 and 30.6.3).	5.2.1.1	5.2.1.2	
126.	Preserved camouflage support system assemblies not unitized in the quantity specfiied.	5.3.1.1		
127.	pallet deckboards not as specified	5.3.1.1.1.1		
128.	Pallet deckboard not positioned on top and bottom decks as specifid.	5.3.1.1.1.1		
129.	Pallet strdingers not as specified.	5.3.1.1.1.2		
130.	Stringer fork entry notches not the size specified.	5.3.1.1.1.2		
131.	Stringer fork entry notches not positioned as specified.	5.3.1.1.1.2		
132.	Pallet size not within specified tolerance.	5.3.1.1.1.3		
133.	Cartons not strapped to pallet as specified (see 30.6.4).	5.3.1.1.2		
134.	Commercial packing not as specified.	5.3.1.2		
135.	Marking not as specified	5.4	5.4	5.4

4.6.2.3.2 Camouflage support system individual component. Camouflage support system individual components shall be examined for the following defects as specified for the different levels of paCkaging:

No.	Defect	A	B	C
136.	Individual components not preserved as specified.	5.2.2.1	5.2.2.1	5.2.2.2
137.	Unlike components placed in same container.	5.2.2.1	5.2.2.1	5.2.2.2
138.	Gross weight of unit container nut as specified.	5.2.2.1	5.2.2.1	
139.	Preserved componentds not packed as specified.	5.3.2.1		5.3.2.2
140.	Shipping container not as specified.	5.3.2.1		5.3.2.2
141.	Box closure and strapping not as specified.	5.3.2.1		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

142.	Unlike components packed in a shipping container	5.3.2.1		5.3.2.2
143.	Marking not as specified	5.4	5.4	5.4

5. PACKAGING

5.1 First article pack. The contractor shall furnish a first article pack for examination within the time frame specified (see 6.2) to prove prior to starting productuon packaging that the appplied preservation, packing, and marking comply with the packaging requirements of this specification. Examination shall be as specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.4). The first article pack may be prepared utilizing either the first article model or a production camoouflage screening support system. When the first article model is utilized, any preservationand packing shall be removed by the contractor at no expense to the Government, when requested by the Government, to facilitate comparison between the first article model and production camouflage screening support systems.

5.2 Preservation. Preservation shall be level A, B or C as specified (see 6.2).

5.2.1 Camouflage support system assembly.

5.2.1.1 Level A. The components comprising a complete camouflage support system assembly (see 3.1.2), shall be properly positioned and contained within the furnished carrying case and then placed in a polyethylene bag fabricated from material conforming to L-P-378, type I, class 1, grade C, finish I, film thickness 0.006 inches. The bag shall be tightly compressed around the carrying case by vacuum, and the bag closed by heat sealing (see 6.5). The bag containing the support system, shall then be placed in a close-fitting box conforming to PPP-B-636, V3s, style FTC-L. The boxes shall be assembled and closed as specified in the appendix to the box specification.

5.2.1.2 Level B. The component comprising a complete camouflage support system assembly, contained within the furnished carrying case, shall be preserved as specified for levelA in 5.2.1.1, except the box shall conform to PPP-B-636, type CF, class domestic, variety SW, grade3 as applicable to the weight or the contents, style FTC-L. Box assembly and closure shall be in accordance with the appendix to the box specification.

5.2.1.3 Level C. The components comprising a complete camouflage support system assembly, contained within the furnished carrying case, shall be preserved to afford protection against damage and deterioration during shipment and handling fromthe contractor to the initial destination.

5.2.2 Camouflage support system individual component.

5.2.2.1 Levels A and B. Individual support system components, when required (see 6.2), shall be placed in unit containers. The unit containers

Source: https://assist.dla.mil -- Downloaded: 20260-22T21:32Z
Check the source to verify that this is the current version before use.

shall & closefitting boxes conforming to PPP-B-636, type CF, class domestic, variety SW, grade 200, style optional. Bos closure shall be as specified in the appendix to the box specification. Like components only shall be placed in a unit container. Unlike components shall not be mixed within a unit container. Unless otherwise specified (see 6.2), the quantity of a component within a unit container shall be sufficient to result in a gross weight of not less than 45 pounds but not more than 50 pounds.

5.2.2.2 Level C. Individual support system components, shen required (see 6.2), shall be preserved as specified in 5.2.1.3.

5.3 Packing. Packing shall be level A or C as specified (see 6.2).

5.3.1 Camouflage support system assemblies.

5.3.1.1 Level A. Ten support system assemblies, preserved as specified in 5.2, shall be unitized in two stacks side by side, five cartons high, on a partial four-way entry, flush, stringer type, hardwood pallet.

5.3.1.1.1 Pallet. The quality of the lumber and assembly workmanship shall be in accordance with commercially acceptable practices.

5.3.1.1.1.1 Deckboards. The shall have a minimum thickness of 0.5625-inches and a minimum width of3.50-inches and 5.50-inches, as applicable. The 5.50-inch width boards shallbe utilized as end deckboards on both the top and bottom decks. Three 3.50-inch width boards shall be evenly spaced between the top end decboards to complete the thop deck. The bottom deck shall be completed by the placement of two 3.50-inch width boards, one each at 4 inches on either side of the centerline of the pallet length as shown in figure 6.

5.3.1.1.1.2 Stringers. The lumber used for the stringers shall have a minimum thickness of 1.50 inches and a minimum width of 3.50 inches. Each pallet shall require three stringers and they shall be positioned asshown in figure 6. Each stringer shall have two fork notches aproximately 9 inches long by approsimately 1.25 inches deep. The notches shall be positioned at approximately 9 inches on each side of th ecenterline of the stringer length. The size of the notch and the positioning of the notches shall be the same for all stringes.

5.3.1.1.1.3 Size. the length of the pallet (the stringer length) shall be equal to the outside dimension (+0 inches, -0.50inch) of the support carton length. The width of the pallet (the deckboard length shall be equal to the outside dimension (+0 inches, -.050 inch) of the two, side by side support cartons.

5.3.1.1.2 Strappin. The cartons shall be secured to the pallet with five strps conforming to QQ-S-781, type I or IV, regular duty, size 0.50-inch, finish B, with a minimum thickness of 0.015 inchy, or with nonmetallic strapping conforming to PPP-S-760, type II or III, with a minimum thickness of

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

0.020-inch. Two straps shall be applied lengthwise to the pallet and three straps shall be applied girthwise to the pallet (see figure 6). Fiberboard or plastic edge protectors of adequate design and size shall be placd between the carton edges and the strap to prevent excessive tearing and crushing of the carton.

5.3.1.2 Level C. Camouflage support system assemblies, preserved as specified in 5.2, shall be packed to assure carrier acceptaance and safe delivery to destination at lowest ratings in compliance with Uniform Freight Classification Rules or National Motor Freight Classification Rules.

5.3.2 Camouflage support system individual comonents.

5.3.2.1 Level A. Camouflage support system individual components, preserced as specified in 5.2, shall be packed in close-fitting boxes conorming to PPP-B-601, overseas thpe, style optional. Box closure and strapping shall be as specified in the box specification and the appendix therto except the strapping shall be fleat and the finish B. Like only shall be packed in each box.

5.3.2.2 Level C. Camouflage support system individual components, presewed as specified in 5.2, shall be packed as specified in 5.3.1.2. Like components only shall be packed in each container.

5.4 Marking. In addition to any special or other identification marking required by the contract or purchase order (see 6.2), each unit pack, exterior container and unitized load, shall be marked in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Interded use. The support assembly is intended for support of a lightweight synthetic camouflage screen system.

6.2 Acquisition requirements. Acquisition documents shall specify the following:

a. Title, number, and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required the specific issue of individual documents referenced (see 2.1.1 and2.2).
c. Type, subtype, and class required (see 1.2 and 4.5.3.2).
d. When individual components are required, and number of units required (see 1.2.1 and 4.5.3.2).
e. When a first article is required for inspection and approval, and number of units required (see 3.2).
f. When reliability testing is required (see 3.10).
g. Time frame for submission of first article pack (see 5.1).
h. Level of preservation and packing required (see 5.2 and 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

i. When preservation, packaging, and packing of individial components are required (see 5.2.2 and 5.3.2).
j. When gross weight of unit container for individual components, when required, shall be other than as specified (see 5.2.2.1).
k. Any Special marking (see 5.4).

6.3 First article. When a first article inspection is required, the item(s) should be a preproduction model. The first article should consist of one or more units.The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Governement, and that bidders offering such products, who wish to rely, on such production or test, must furnish evidence withthe bid that priorl Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 First article pack. Any changes or deviations of production packs from the approved first article pack will be subject to the approval of the contracting officer. Approval of the first article pack will not relieve the contractor of his obligation to preserve, package, pack,and mark the camouflage screening systems in accordance with this specification.

6.5 Levels A and B preservation. The intent of the polyethylene bag is to provide the means for compressing the filled carring case, thus reducing the cube. The moisture barrier characteristic of the bag's application is secondary.

6.6 Subject term (key word) listing.

Pole
Batten spreader

6.7 Changes from privious issue. Marginal notations are not used in this revision to identify changes with respect to the previous due to the extensiveness of the changes.

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 1080-A081

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

NOTES:

1. JACK AND TOP HOLDING DEVICE SHALL BE PERMANENTLY FIXED. THE CENTER OF THE TOP HOLDING FIXTURE WILL BE IN LINE WITH THE CENTER OF THE RAM OF THE JACK. THE JACK WILL HAVE A STROKE OF AT LEAST 12 INCHES.

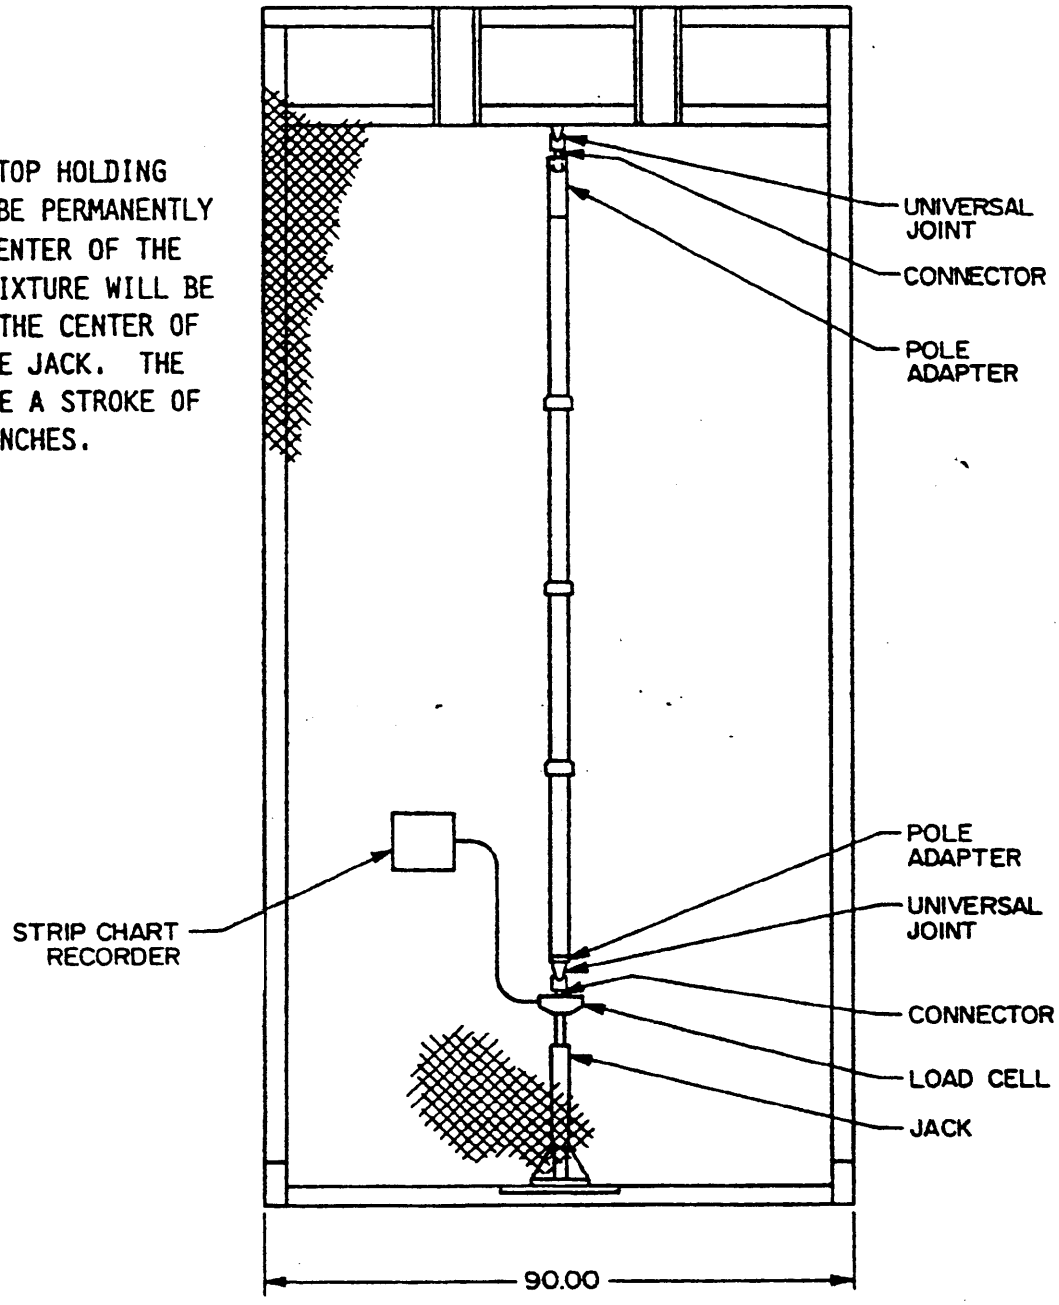


FIGURE I. Column load test fixture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

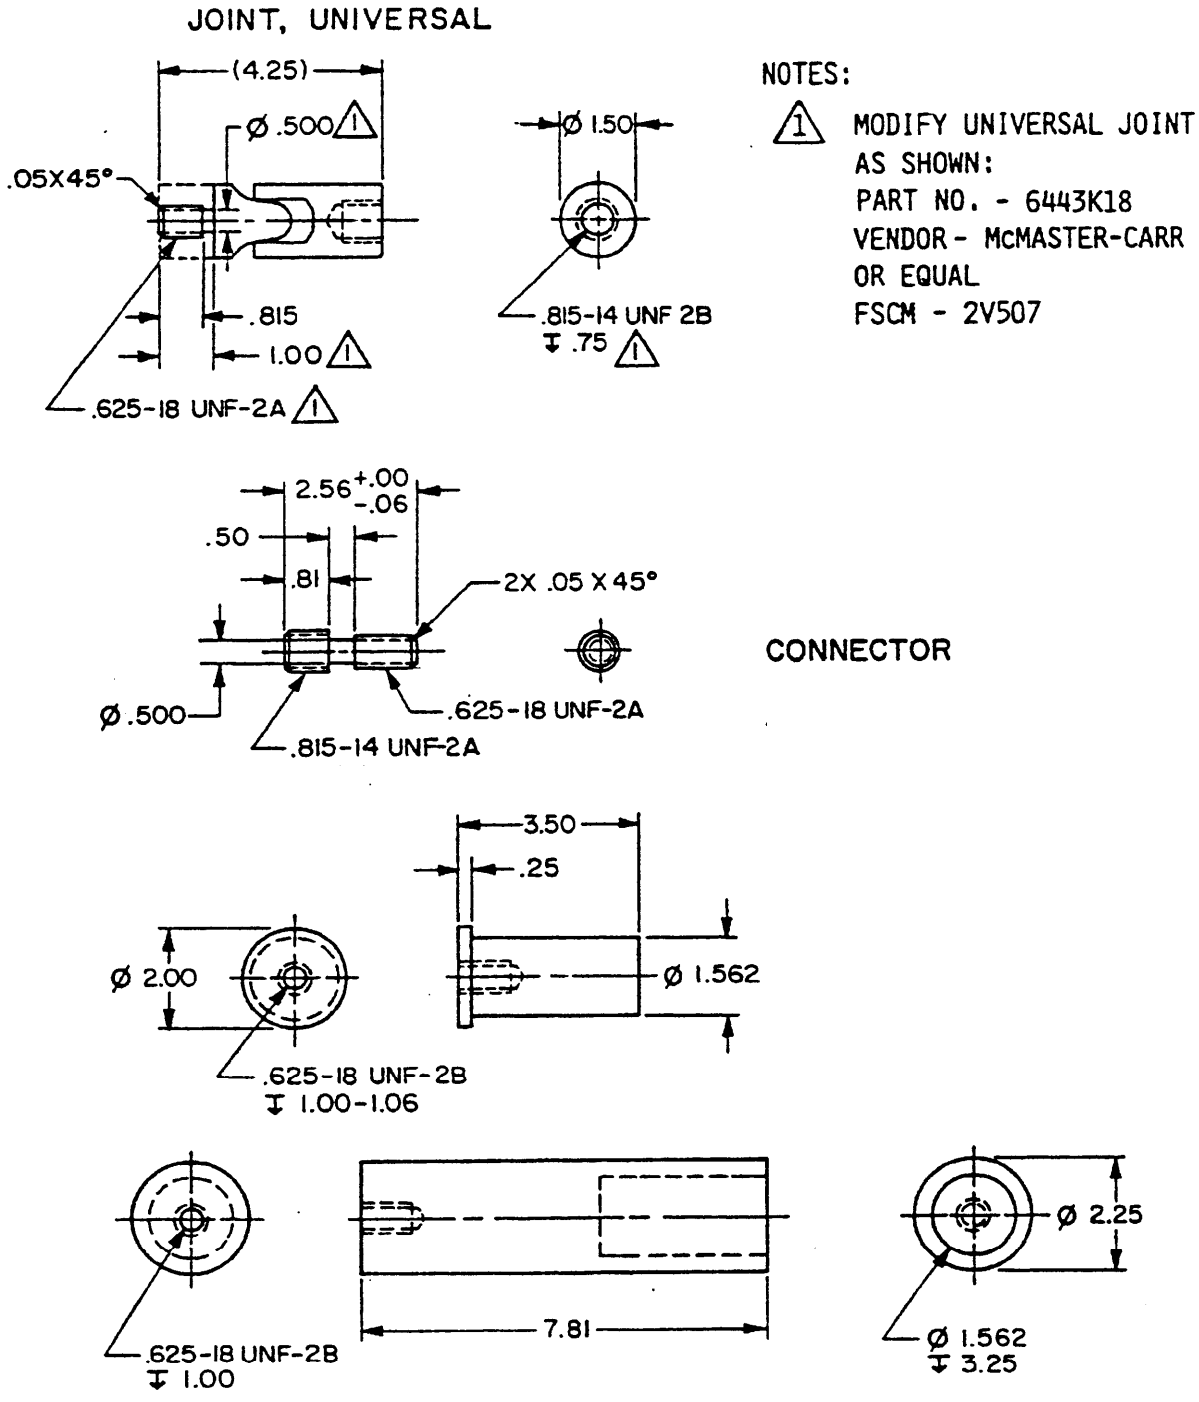


FIGURE 2. Test fixture components.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:32Z
Check the source to verify that this is the current version before use.

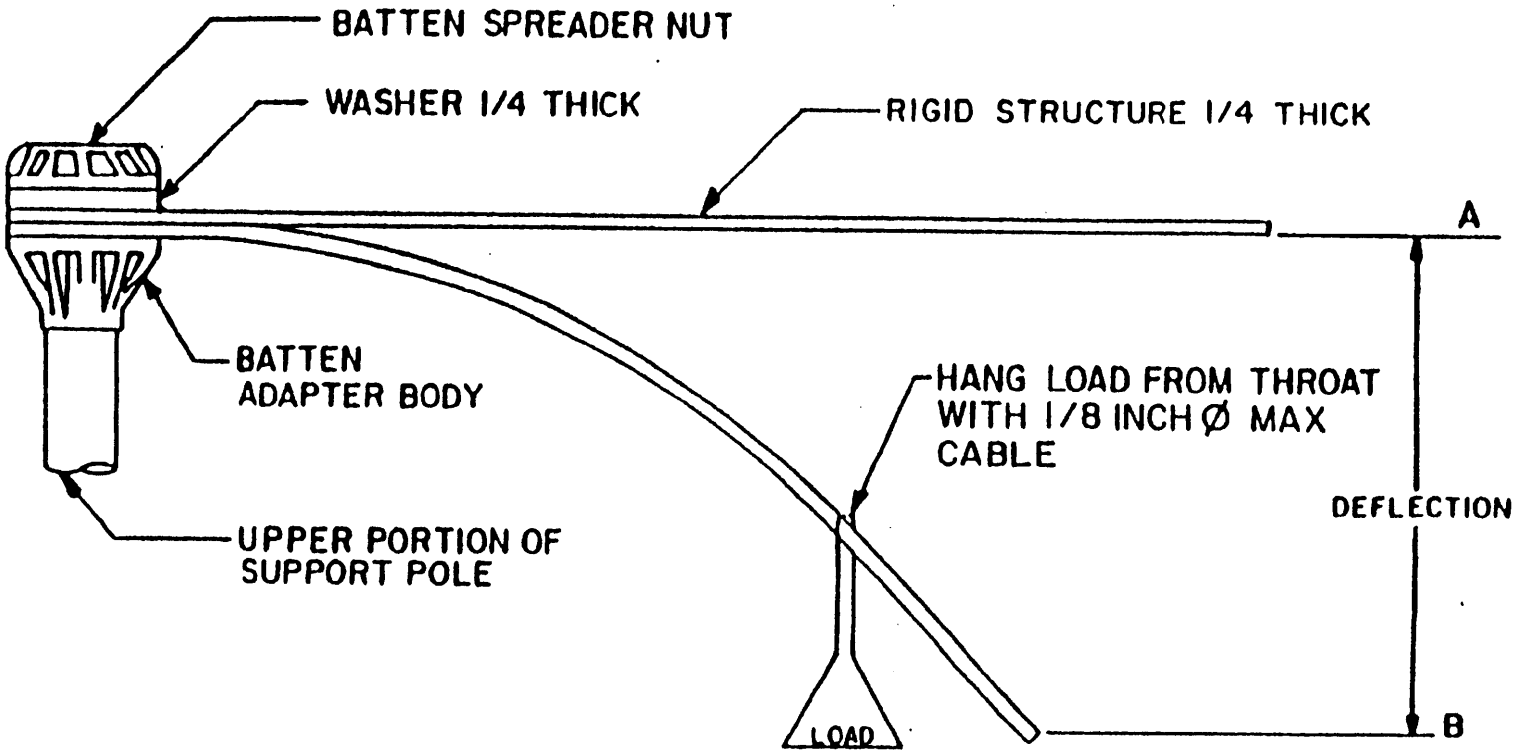


FIGURE 3. Load deflection fixture for batten spreaders.

X-3724C

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:32Z
Check the source to verify that this is the current version before use.


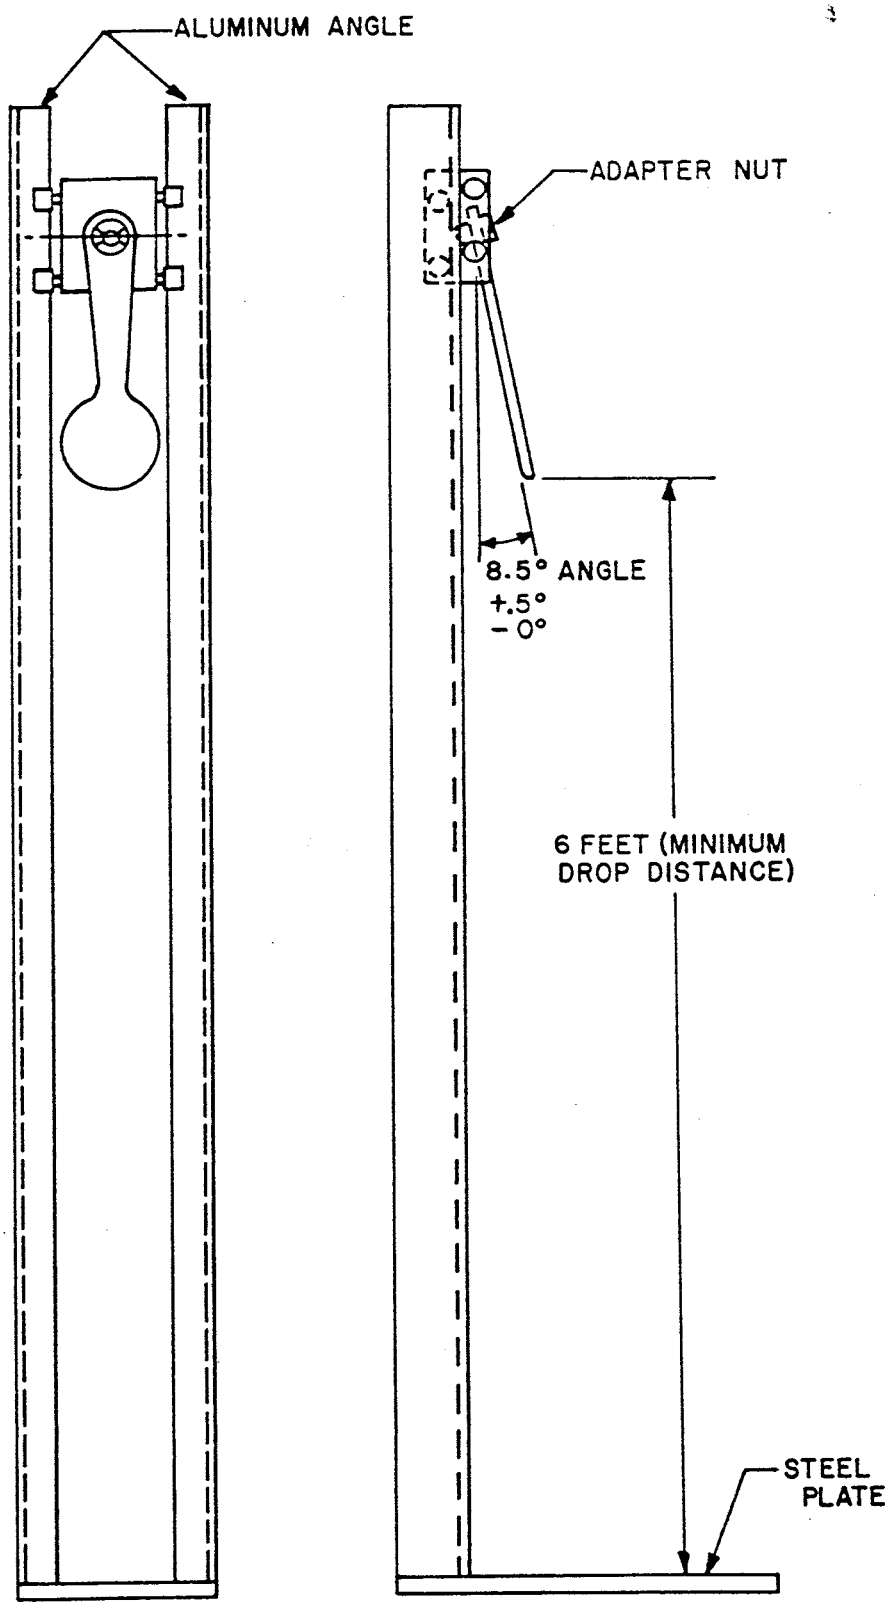


FIGURE 4. Batten spreader impact test fixture.

X-4432A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

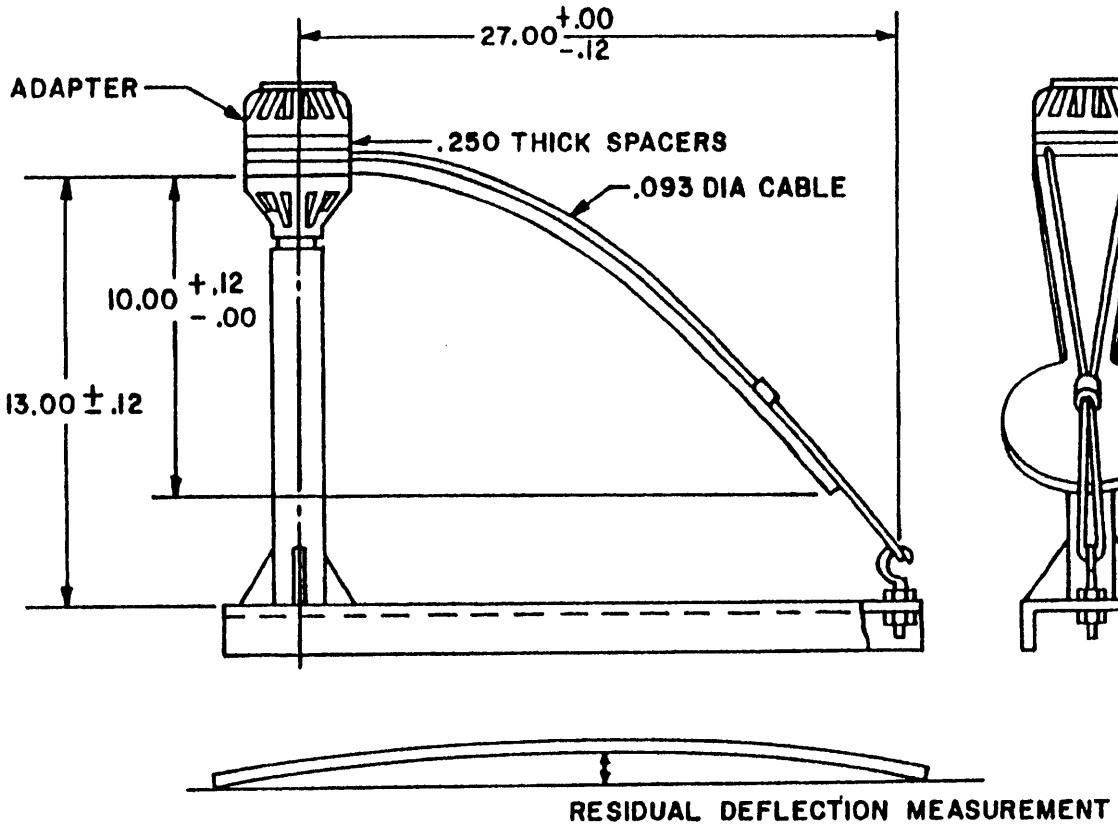

NOTE: ALL DIMENSIONS ARE IN INCHES.

FIGURE 5. Batten spreader residual deflection test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

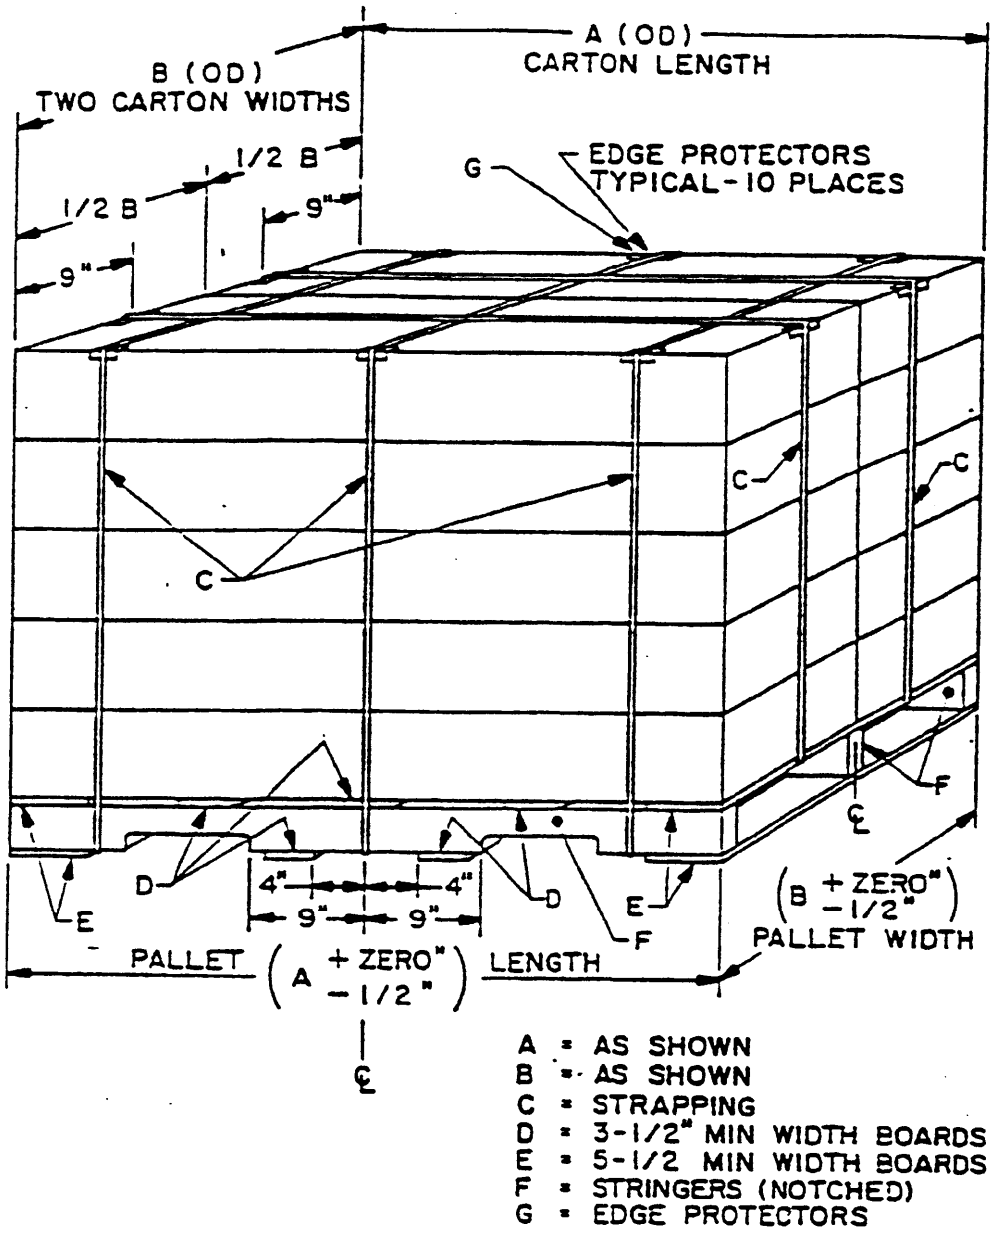


FIGURE 6. Unitization of support systems.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

WORKMANSHIP STANDARDS FOR CAMOUFLAGE SCREEN SUPPORT SYSTEM

10. SCOPE

10.1 Scope. This appendix covers accepthacn criteria in the manufacture of camouflage screen support systems to achieve uniformity in appearance and quality. This appendix is a mandatoru part of the specification. The information contained herein is intended for compliance.

20. APPLICABLE DOCUMENTS

This section is not applicable to this appendix.


30. REQUIREMENTS

30.1 Batten spreader.

30.1.1 Batten spreader subtype A and subtype B.

30.1.1.1 Questionable parts. Battenspreaders foung to be of questionable quality when inspected to the criteria of this standard shall be subjected to an 80-pound load test (strength test). Successful completion of this test shall establish their conformance.

30.1.1.2 Critical area. This section of the batten spreder has been determinecd to be the area most susceptabl4e to failure under load conditions. Special attention should be givetn to this area whenb parts are examined for conformance.

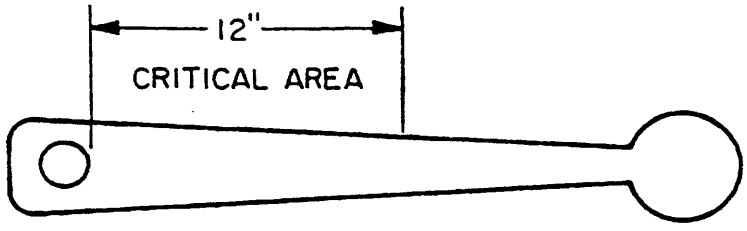


Source: https://assist.dla.mil -- Downloaded: 2026t0-22T21:32Z
Check the source to verify that this is the currentversion before use.

30.1.1.3 Sharp corners and edges.


Sharp corners

Unacceptable

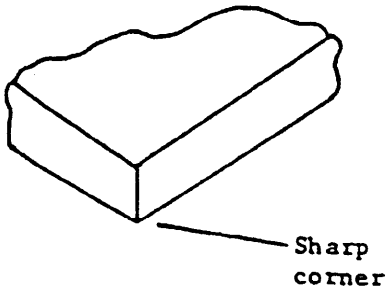


Part with sharp corner(s).

Acceptable

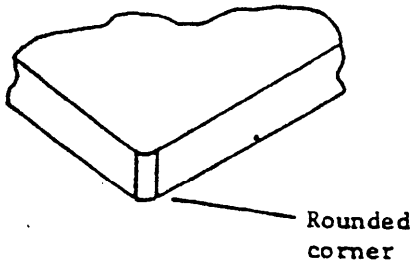


Corner on part has been rounded.

Sharp edges

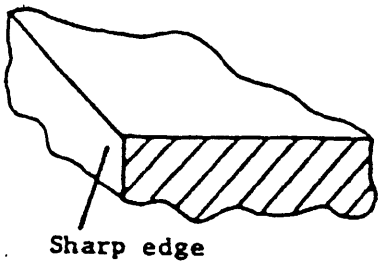

Part with sharp edge(s).

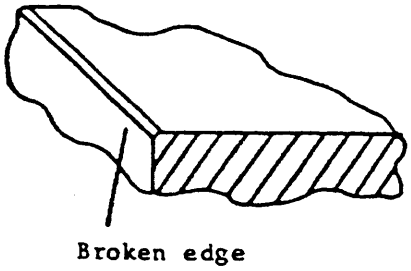


All edges on part broken.

Note: Refer to the approved visual aids when making conformance decisions for rough edges. Consider units with borderline conditions to be acceptable so as to eliminate grey areas.

X-4002A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

30.1.1.4 Mounting hole location (1.88 dimension). Check for conformance to the 1.88 ± .03 dimension (lateral location of mounting hole) as follows:




$$\text{Offset} = \frac{A-B}{2}$$

If the quotient does not exceed ± .03-inch consider the unit under inspection to be acceptable.

30.1.2 Batten spreader subtype A (FRP batten spreader).

30.1.2.1 Thickness measurement. The thickness measurement shall be made with a micrometer and shall be applicable to all areas except for ejection pin depressions. Acceptance (or rejection) for this characteristic shall be based on the average of 5 readings taken at random.

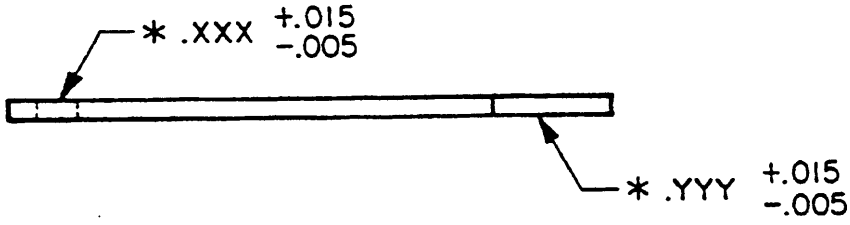


* Manufacturer shall specify a fixed value between the allowable thickness range in accordance with applicable drawing and remain within the allowable tolerances.

X-4006B


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

30.1.2.2 Cracks and blisters.

UNACCEPTABLE

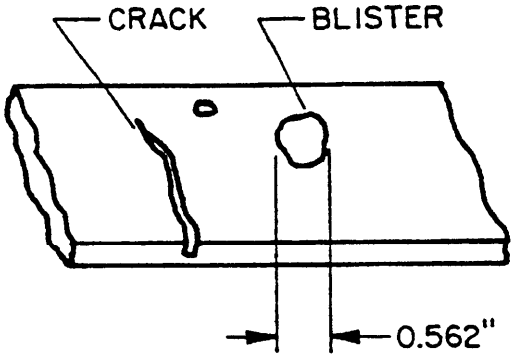

ACCEPTABLE

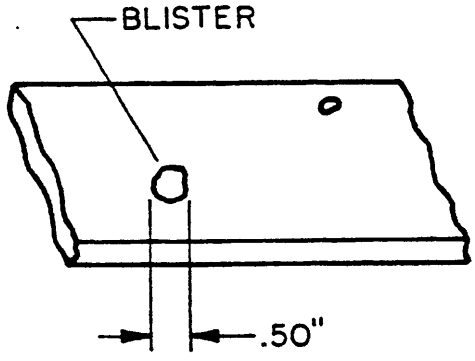

Cracks

Any crack visible to naked eye.	No cracks visible to naked eye.

Blisters


Blister which exceeds .50-inch diameter or total blisters per side in excess of 1 square inch of area.	Blister which does not exceed .50-inch diameter or total blisters per side not in excess of 1 square inch in area.

Note: Crazing is a surface condition which has little bearing on the effective use of the batten spreader. It is not cause for rejection.

X-4000B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

30.1.2.3 White areas and foreign material.

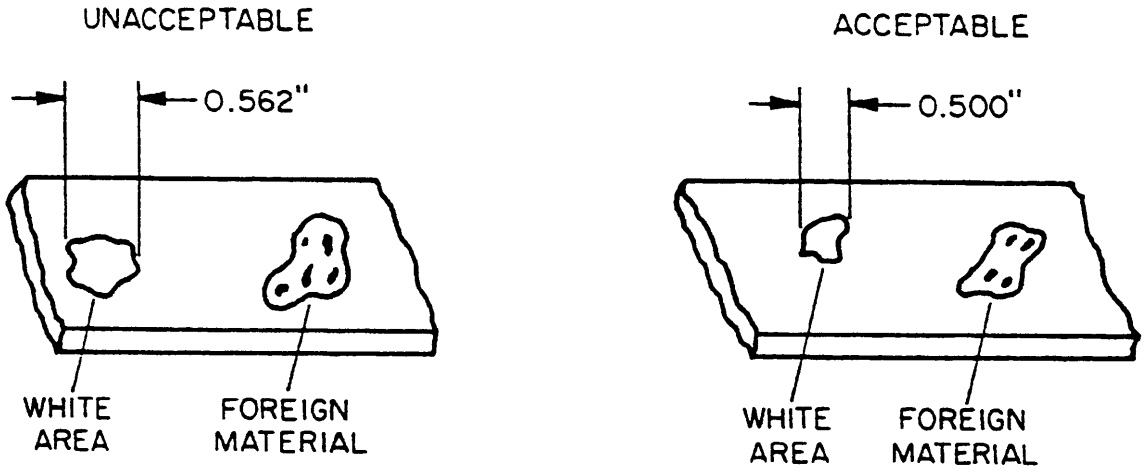

White areas

Part contains white area which exceeds 0.50-inch diameter or total white area per side in excess of 1 square inch.	White area no part which does not exceed 0.50-inch in diameter or total white area per side not in excess of 1 square inch.

Foreign material


Part contains foreign material in excess of 1 square inch per side.	Foreign material on part does not exceed 1 square inch per side.

Note: The areas at which edges are broken shall not be included when making conformance decisions for white areas.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.


30.1.2.4 Porosity.

UNACCEPTABLE

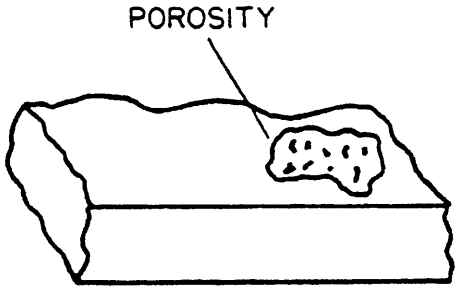


Porosity exceeds 2 square inches per side.

ACCEPTABLE

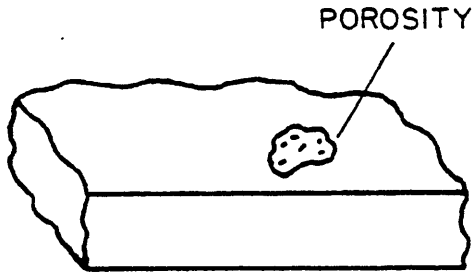


Porosity per side does not exceed 2 square inches.

30.1.2.5 Removed fibers.

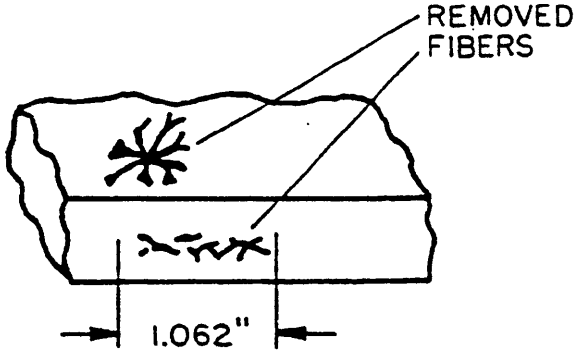

Removed fibers in excess of 1 square inch per side or more than 1 inch on end.

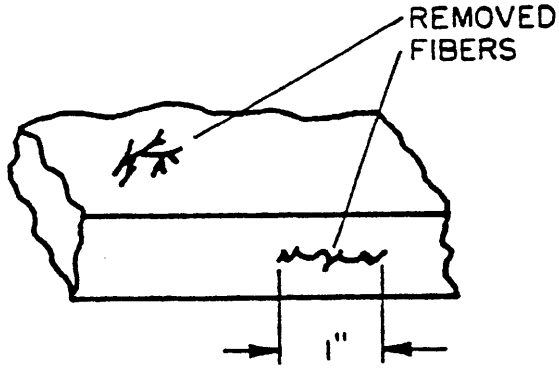


Removed fibers per side do not exceed 1 square inch and are no more than 1 inch in length on end.

X-4003B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.


30.1.2.6 Loose fibers.

UNACCEPTABLE

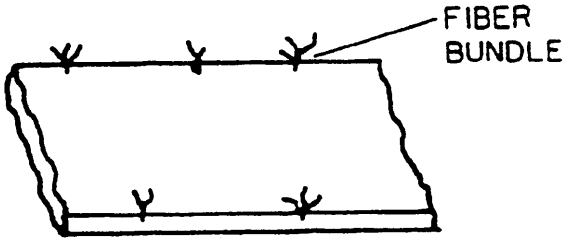

Part contains more than 4 fiber bundles.

ACCEPTABLE

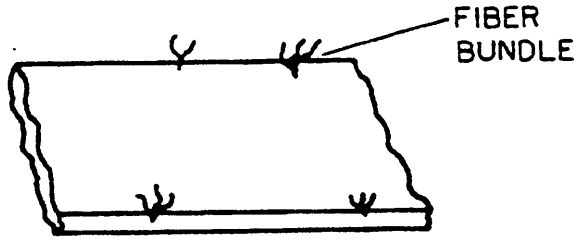


Maximum of 4 fiber bundles on part.

Note: A fiber bundle consists of 2 or more glass fibers which are localized and which extend freely above the surface of the batten spreader.

30.1.27 Edge separation.


UNACCEPTABLE

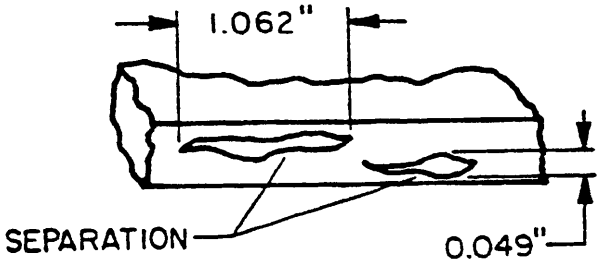

Part contains separation which exceeds 1 inch in length.

Part contains separation with an opening in excess of 0.03125-inch.

ACCEPTABLE

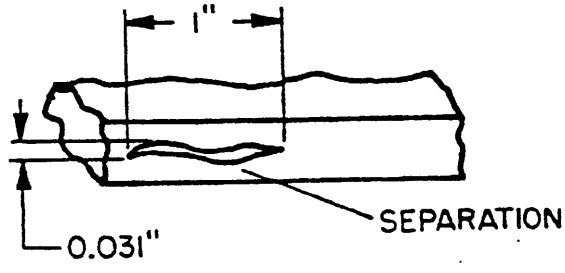

Length of separation on part does not exceed 1 inch.


Opening of separation on parts does not exceed 0.03125-inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

30.1.2.8 Defect accumulations. Any combination of porosity, removd fibers, blisters, blisters, shite areas, and foreign material in excess of 3 square omcjes per side shall be cause for rejection. This criteria shall apply only when the individual requirement specified for each of the defect areas is first satisfied.


30.1.2.9 Breaking strength test.

Unacceptable

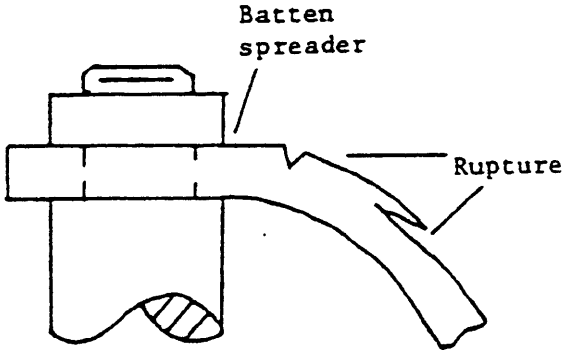

Rupture which results in abrupt change in specimen configuration.

Acceptable

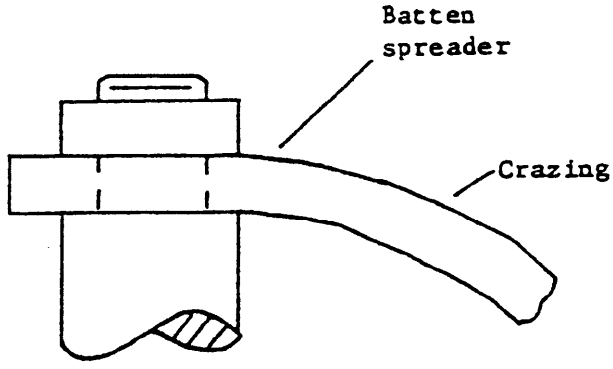

No evidence of rupture.

Crazing is allowable.

Notes: Specimen failure shall be defined as specimen rupture i.e. break typified by an abrupt change in specimen configuration.

Crazing may appear while the batten spreader is under load. Crazing shall not be cause for rejection.


Failure shall be recorded at the level (weight) at which rupture occurs.

30.1.2.10 Warped parts. Batten spreaders shall not be warped in excess of the limit provieded by the approved visual standard (regerence max. std. warp no. 1).


X-4004B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

30.1.2.11 Watercuts. Batten spreader can be reworked to blend in and deburr watercuts or blemishes which are not greater than 0.250-inch deep.

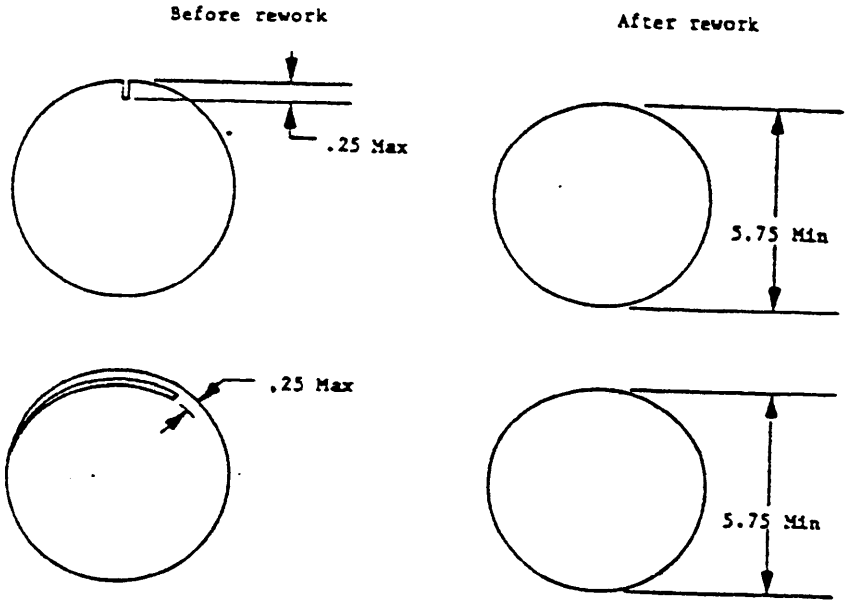

Watercuts or edge blemishes not greater than 0.0125-inch deep and not located in critical areass or on both sides are acceptable. Transverse water cuts shall be acceptable without rework. Longitudinal watercuts shall be blended in and deburred.

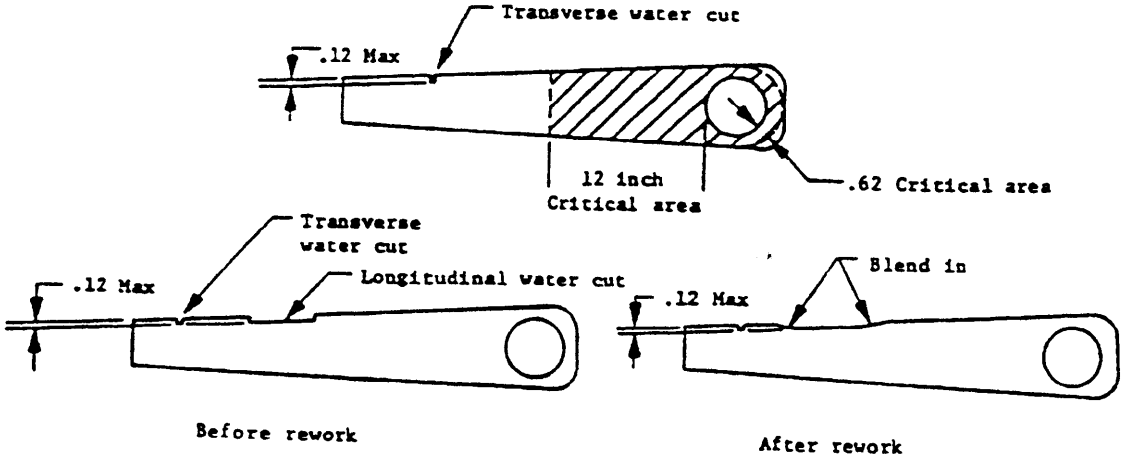


Note: Hole location dimensions shall be maintained regardless of watercuts.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

30.1.3 Batten spreader subtype B (theremoplastic batten spreader).

30.1.3.1 Thickness measurement. The thickness measurement shall be made with a micrometer and shall be applicable to all areas except for ejection pin depressions. Acceptance (or rejection) for this characteristic shall be based on the average of 5 readings taken at random on each of the components.

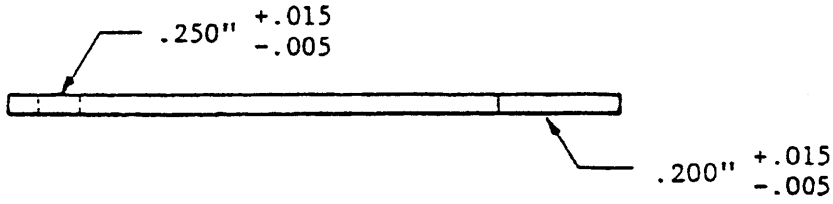

30.1.3.2 Cracks.

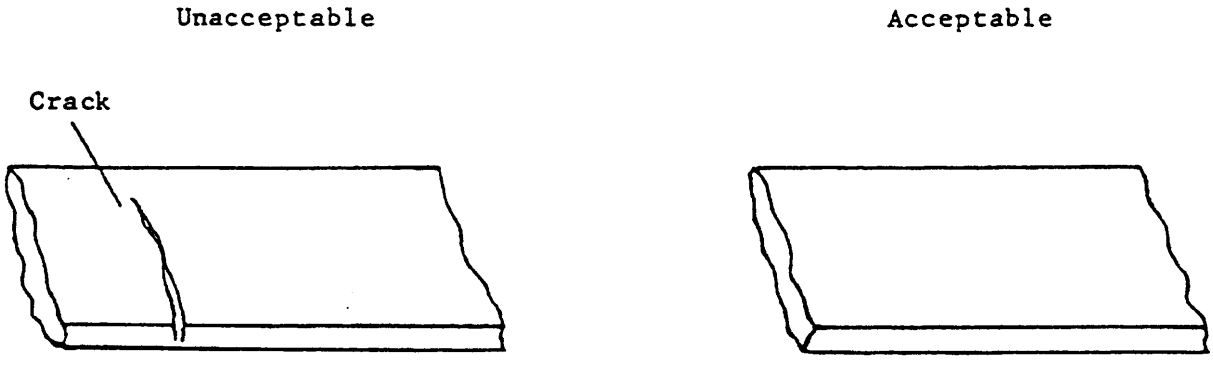

Cracks

Any crack visible to naked eye.


No cracks visible to naked eye.

X-4443A


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

30.1.3.3 Foreign material.

Unacceptable

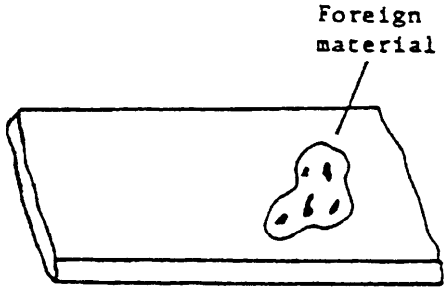

Acceptable

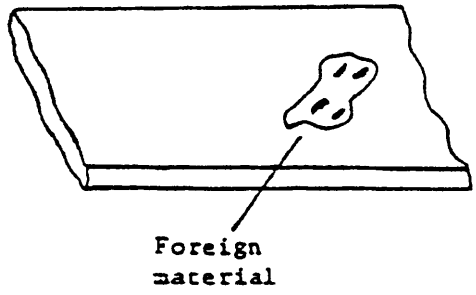

Foreign material


Part contains foreign material in excess of 1 square inch per 1 square inch per side.

Foreign material on part does not exceed 1 square inch per side.


X-4444A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

30.1.3.4 Porosity and blisters.

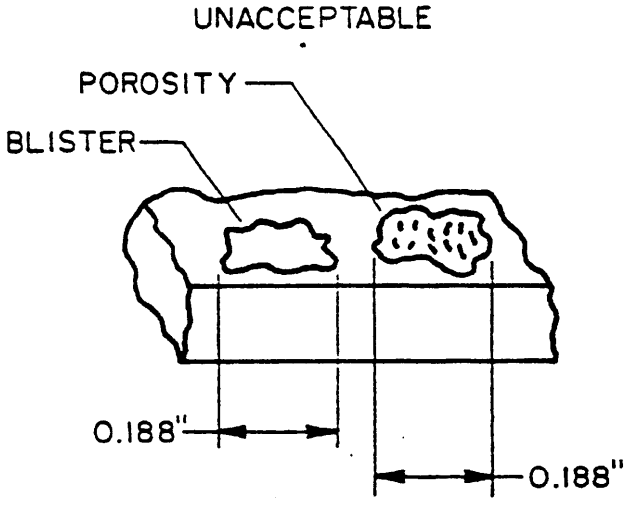

Any porosity or blisher later than than .125-inch or total porosities or blisters shall not exceed 1 square inch per side.

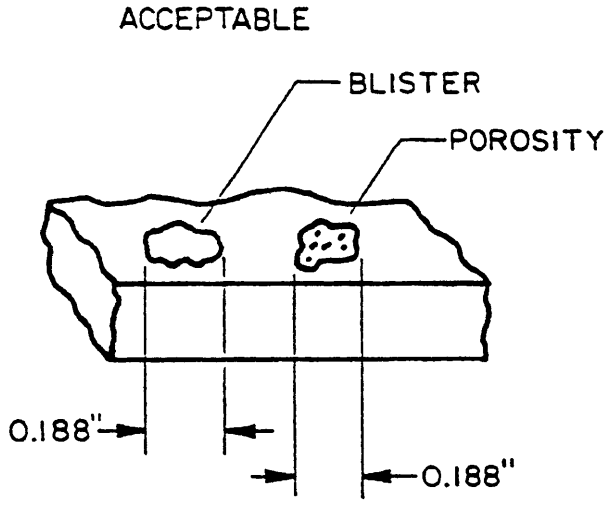

No porosity or blister larger than .125-inch or total porosities or blisters does not exceed 1 square inch per side.


30.1.3.5 Defect accumulations. Any combination of porosity, blisters, and foreign material in excess of 1.500-square inches per side shall be cause for rejection. This criteria shall apply only when the individual requirment specified for each of the defect areas is first satisfied.

X-4445A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

30.2 Batten spreader adapter.

30.2.1 Discoloration. Discoloration will be allowed on the end opposite the threads if it does not extend along the side wall of the batten adapter body beyond the webs (approximately 0.125-inch).

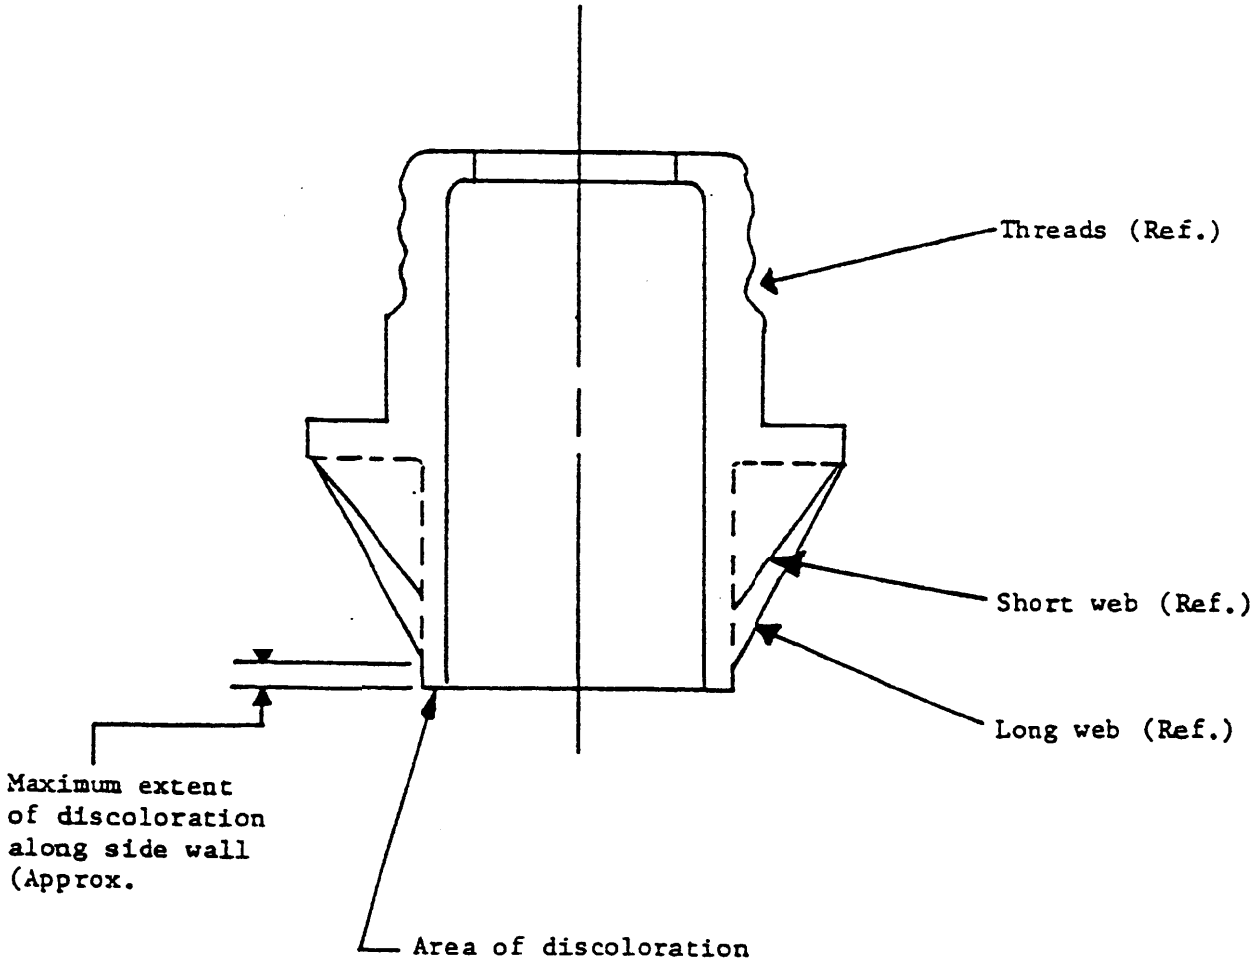


X-4007A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

30.3 Magnaformed poles, alumimum.

30.3.1 Pole assembly.

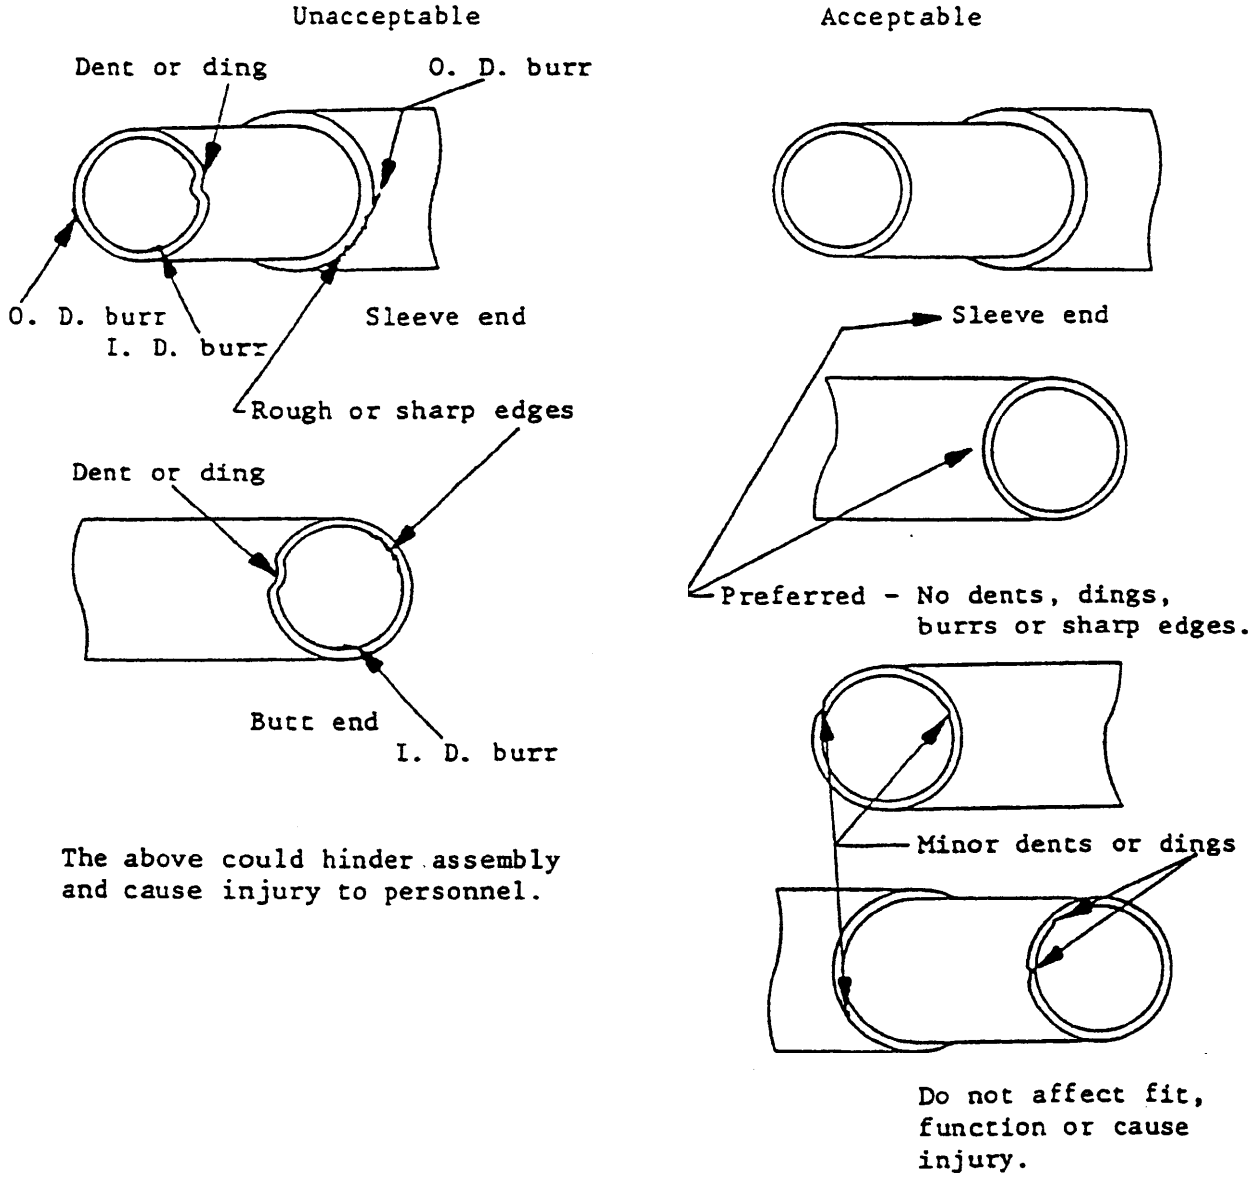

30.4 Color. Class 1 support poles shall be comparable to FED-STD-595, color 34079, or to an approved sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

APPENDIX

30.5 Grommets (rolled Settings).

30.5.1 Grommet assembly.


Unacceptable	Acceptable
a. More than one crack in a grommet	a. One crack maximum in a grommet.
b. Grommet loose on material to Which it is attached.	b. Grommet firmly attached to its mating materal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

30.6 Packaging.

30.6.1 Box assembly.


UNACCEPTABLE

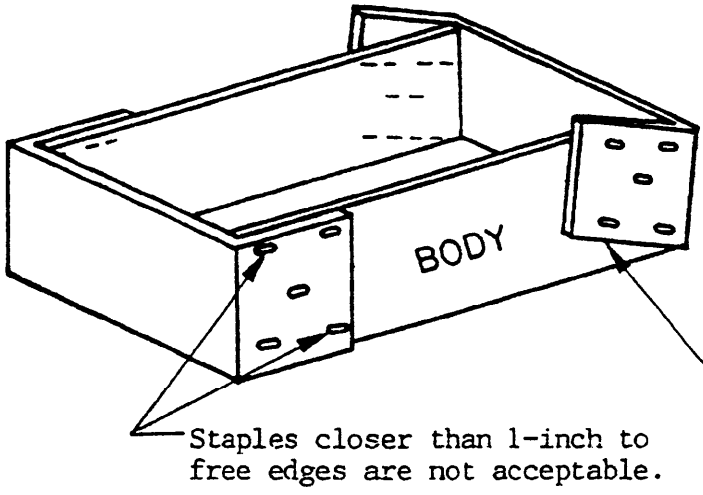

Staples closer than 1-inch to free edges are not acceptable.


Flaps more than .250-inch above edge of side wall are not acceptable.

ACCEPTABLE

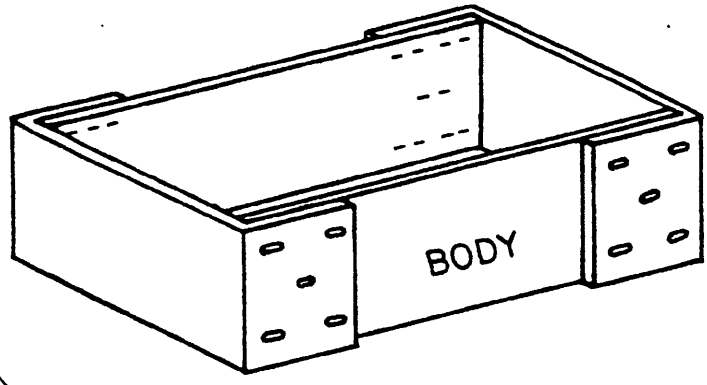

Typically preferred


Folding, staple location and pattern.

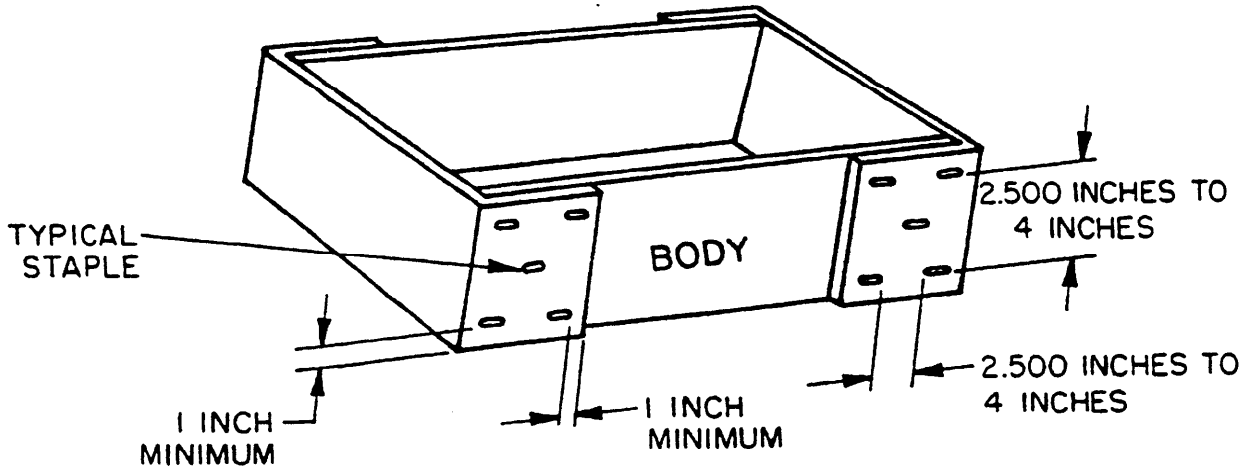

Acceptable dimensions for assembly

X-4048B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

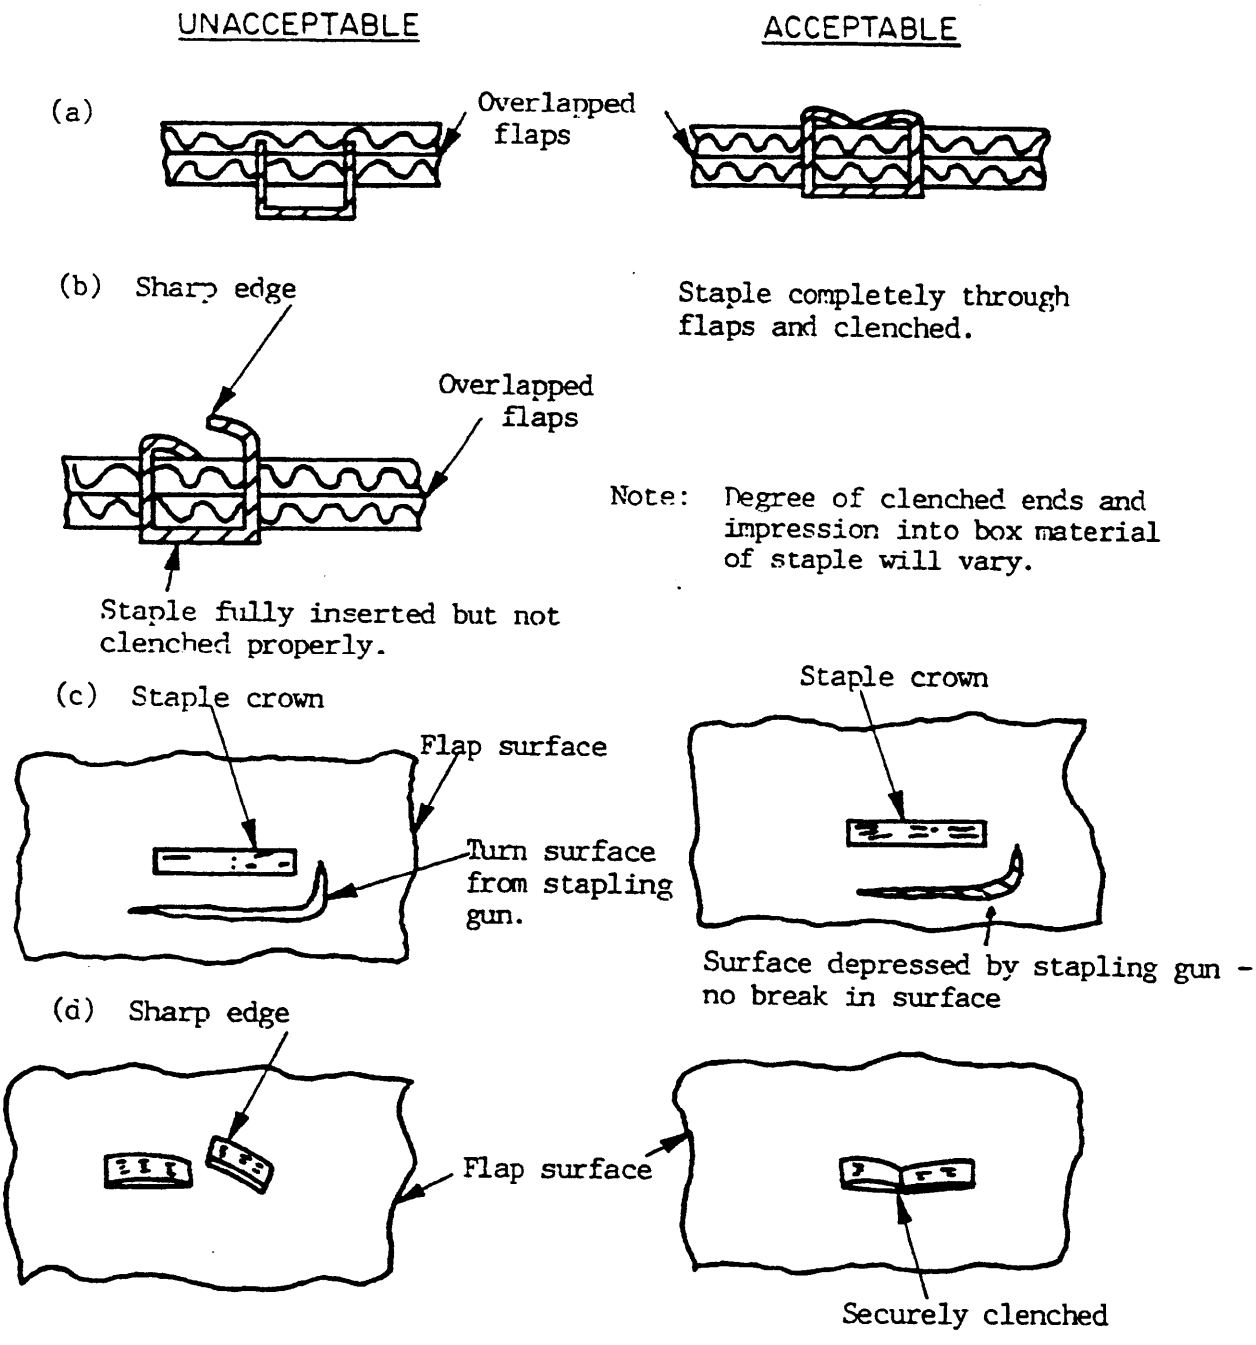


X-4049A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

Top of body of a container which exhibits punctures through the wall which exceed 0.50-inch square or which exhibits tears or separations of fiberboard material in excess of 1 inch in length.	Completed container which contains not more than 2 punctures which are 0.50-inch or less, or which contains not more than 2 tears or separations which are 1 inch in length or less.

Note: If not more than 10 percent of unacceptable conditions (a) and (c) are present on a completed box assembly, it shall be considered acceptable.


30.6.2 Ploybag, heat seal.

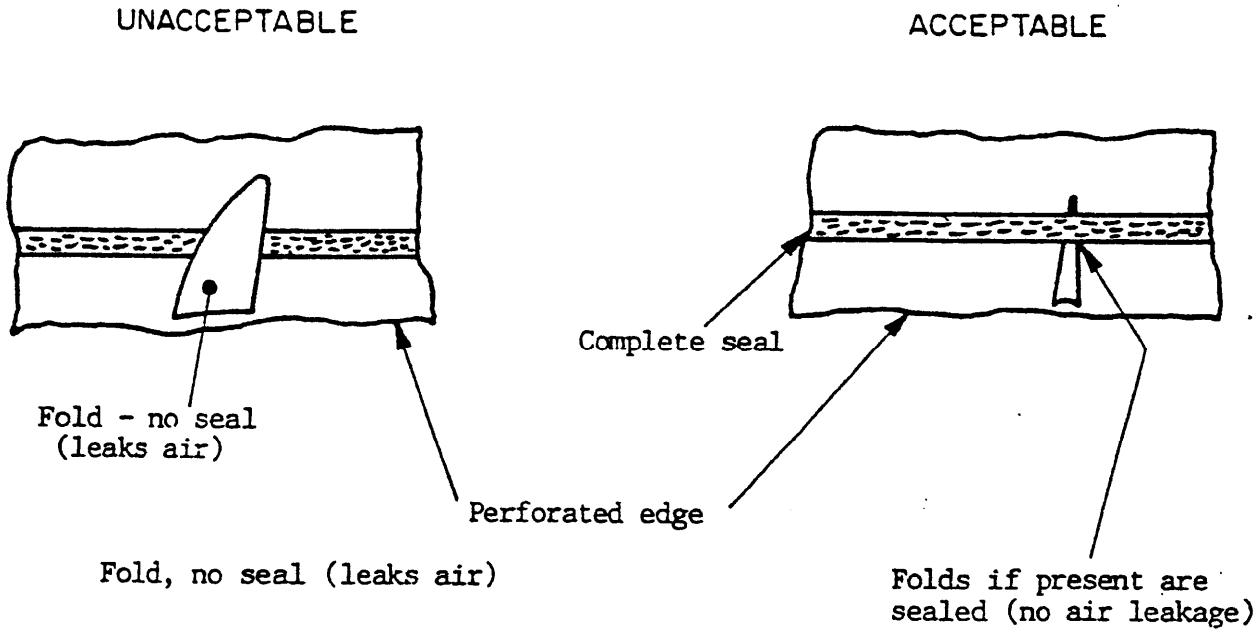

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.


30.6.3 Box closure.

UNACCEPTABLE

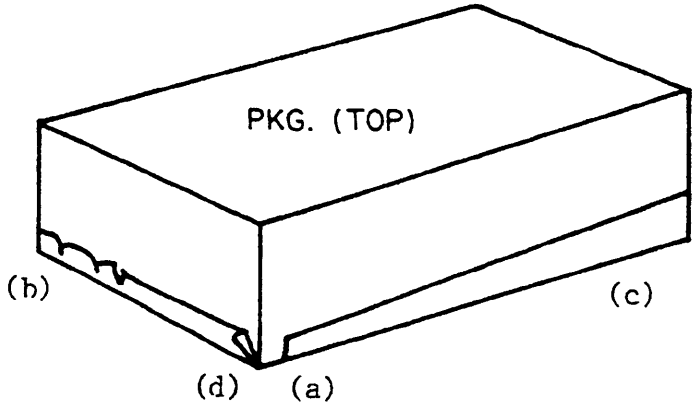


(a) Tape incomplete application
(b) Excessive wrinkles
(c) Tape unevenly applied
(d) Tape not sticking

ACCEPTABLE

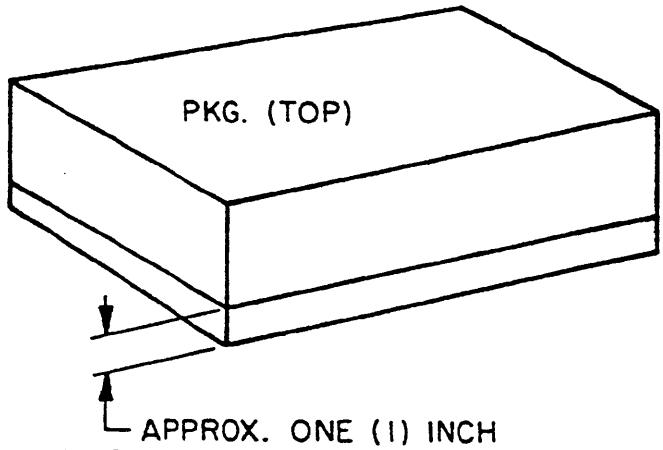


Preferred condition, complete application, no wrinkles, not unevenly applied and well stuck to carton all over.

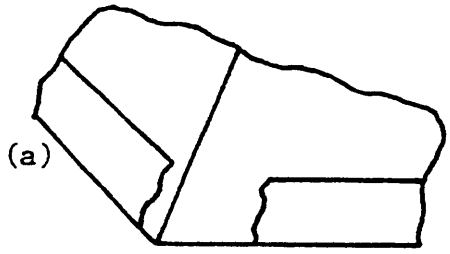

Incomplete application

(a) Tape must meet or overlap to be acceptable. (Length of overlap may vary.)

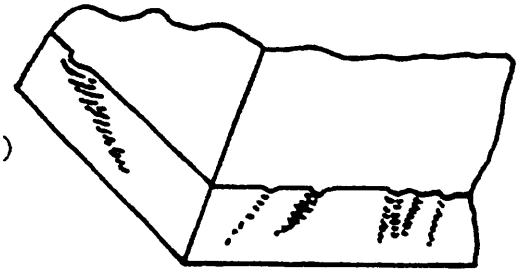

Excessive amount of wrinkles on more than 10 % of a side and significant in size.

(b) Note: Folding of tape is necessary at the corner proper, and acceptable.

Amount of wrinkles on not more than 10 % of a side of significant size and/or not more than 20 % which are superficial in nature.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

UNACCEPTABLE

ACCEPTABLE


(c) Taping acceptable when it varies in width less than 0.50-inch on a side.

(c)

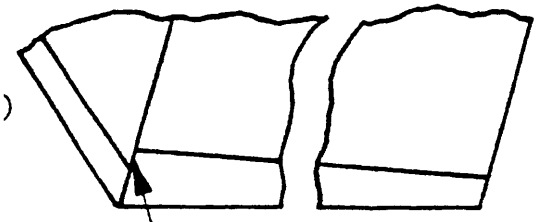

Tape not evenly applied on sides. (Varies over 0.50-inch in width)

(d)

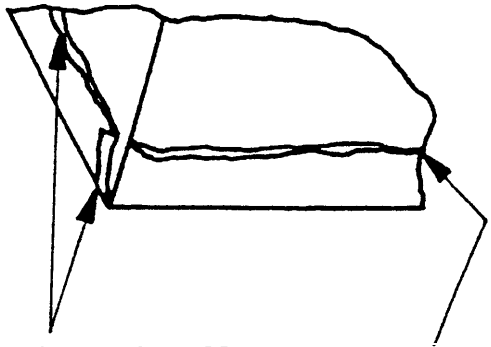

More than 25 % of tape edge curls or does not adhere to box over 0.50-inch from edge of tape.

(d) Conditions where 25 % or less of tape edge curls do not adhere to box over 0.50-inch from edge of tape.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:32Z
Check the source to verify that this is the current version before use.

30.6.4 Strapping application and pallet quality.

Unacceptable	Acceptable
a. Tension so great that strapping tears and cuts completely through carton edges	a. Strapping tension firm but does not tear or cut completely through carton edges.
b. Strapping not whithin 2 inches of being parallel to the carton edges.	b. Strapping parallel to Carton edges within 2 inches.
c. Strapping loose to the point that it can be easily moved sideways at the box or pallet edges where it had been applied.	c. Strapping which is applied firmly and Cannot be easily moved sideways to the box or pallet edges.
d. Major damage to pallet such as broken stringers or deckboards.	d. Minor deparatures in pallet quality such as checks, shakes or splits, any of which are no longer thjan the width of the member.

X-4447

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-52765E(ME)	13 September 1990

3. DOCUMENT TITLE
Camouflage Screening Support Systems

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)
	e. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial: (703) 664-5717 (2) AUTOVON: 354-5717
c. ADDRESS (Include Zip Code) US Army Belvoir RDE Center ATTN: STRBE-TSE Ft. Belvoir, VA 22060-5606	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 202640-22121:322
Check the source to verify that this is the current version before use.