MILITARY SPECIFICATION

CARRYING CASE ASSEMBLIES, INFLATABLE LIFE RAFT

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for seven types of inflatable life raft carrying case assemblies.

1.2 Classification. Inflatable life raft carrying case assemblies shall be of the following types, as specified (see 6.2(b)):

Type I - Carrying Case Assembly, LRU-12/A Life Raft

Type II - Carrying Case Assembly, LRU-1/P Life Raft

Type III - Carrying Case Assembly, LRU-13/A Life Raft

Type IV - Carrying Case Assembly, LRU-14/A Life Raft

Type V - Carrying Case Assembly, For Droppable LRU-15/A and F-2B Life Rafts

Type VI - Carrying Case Assembly, For Wing Installation of Twenty Man Life Rafts LRU-15/A

Type VII - Cover/Carrying Case Assembly, Twenty Man Life Raft (C-130 Aircraft) LRU-15/A

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Air Engineering Center, ESSD, Lakehurst, New Jersey 08733 by using the self-addressed Standard Document Improvment Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 4220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

UU-P-268	-Paper, Kraft, Untreated, Wrapping
PPP-B-636	-Box, Fiberboard
PPP-C-795	-Cushioning Material, Flexible, Cellular, Plastic Film for Packaging Applications
PPP-C-843	-Cushioning Material, Cellulosic
PPP-C-1752	-Cushioning Material, Packaging, Unicellular Polyethylene Foam, Flexible
PPP-C-1797	-Cushioning Material, Resilient, Low Density, Unicellular, Polypropylene Foam
PPP-C-1842	-Cushioning Material, Plastic, Open Cell (For Packaging Applications)
PPP-T-45	-Tape, Gummed, Paper, Reinforced and Plain, for sealing and Securing

MILITARY

MIL-B-117	-Bag, Sleeve and Tubing - Interior Packaging
MIL-B-121	-Barrier Material, Greaseproofed, Waterproofed, Flexible

STANDARDS

FEDERAL

FED-STD-751	-Stitches, Seams, and Stitching

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105	-Sampling, Procedures and Tables for Inspection by Attributes
MIL-STD-129	-Marking for Shipment and Storage
MIL-STD-130	-Identification Markings of U.S. Military Property
MIL-STD-889	-Dissimilar Metals

DRAWINGS

NAVAL AIR SYSTEMS COMMAND

62A82H5	-Carrying Case Assembly, LRU-12/A Life Raft
62A82H6	-Carrying Case Assembly, LRU-1/P Life Raft
62A82H601	-Carrying Case Assembly, LRU-13/A Life Raft
62A96H4	-Carrying Case Assembly, LRU-14/A Life Raft
63A80H6	-Carrying Case Assembly, For Droppable LRU-15/A and F-2B Life Rafts
63A80H13	-Carrying Case Assembly, For Wing Installation of Twenty Man Life Rafts LRU-15/A

NAVAL AIR DEVELOPMENT CENTER

CL214D2	-Cover/Carrying Case Assembly, Twenty Man Life Raft (C-130 Aircraft) LRU-15/A

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. Unless otherwise specified, the carrying case assemblies furnished under this specification shall be products which have been inspected and passed the first article inspection specified in 4.3.

3.2 Material and components. The material and components shall conform to applicable specifications, standards, and drawings as listed or required herein (see 6.2(i)(1)). Materials and components which are not covered by applicable specifications, standards, or drawings, or are not specifically described herein, shall be of the lightest practicable weight and entirely suitable for the purpose intended. Unless otherwise specified, the material and components, except for the metallic parts used in the fabrication of the carrying cases, shall have been manufactured not more than eighteen months prior to the date of delivery of the carrying case (see 6.2 (i)(2)).

3.2.1 Metal parts. All metal parts shall be of a corrosion resistant material or treated in a manner to render them adequately resistant to corrosion.

3.2.2 Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MIL-STD-889.

3.3 Design.

3.3.1 Carrying case assemblies. The carrying case assemblies furnished under this specification shall conform to Drawings 62A82H5, 62A82H6, 62A82H601, 62A96H4, 63A80H6, 63A80H13, or CL214D2, as applicable (see 6.2 (c)).

3.3.2 Pull cable assemblies. Unless otherwise specified, the carrying cases conforming to Drawings 62A82H5, 62A82H6, 62A82H601, 62A96H4, and 63A80H6, shall be provided with a pull cable assembly conforming to applicable drawing requirements.

3.4 Construction.

3.4.1 Cut edges. All the cut edges of the uncoated nylon fibrous materials, except for the base cloths which are to be coated, shall be seared prior to fabrication to prevent fraying. No sharp edges shall be formed by the searing process.

3.4.2 Use of the adhesive. In all the cementing operations, the surface to which the adhesive is applied shall be thoroughly cleaned with a suitable solvent in such a manner that the dusting material (talc) and any other surface contaminant is removed. The surface shall be clean

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

prior to cementing. Care should be exercised to insure that the coating and the base undercloth are not damaged, and the adhesion between both is not impaired in any way, or by prolonged exposure to the solvent. The solvent used shall evaporate completely prior to the application of the adhesive, and shall leave no residue. Cemented areas shall not contain trapped air, channels, or excessive wrinkling. The adhesive shall be controlled to insure that old adhesive, or adhesive that has partly or completely polymerized is not used. A fresh batch of the adhesive shall be used at least every eight hours during the course of manufacturing (see 4.4.1.1.3). Containers for the adhesive shall be free from congealed adhesive before being refilled.

3.4.3 Cementing of the seams, seam tapes, patches, and attachments. Seam construction and seam tape, patch, and attachment applications shall be in accordance with applicable drawing requirements. The techniques and precautions outlined in 3.4.2 shall be used in order to effect optimum bonding properties, and to ensure compliance with the requirements of this specification. The adhesive shall not be applied in a straight line parallel to the edges of the seam, seam tape, patch, or attachment; and shall extend from just being visible to a maximum of one inch beyond the applicable edge. The adhesive shall not be allowed to remain in clots or permitted to extend in such a manner as to result in localized stiffness. There shall be no spots or stains resulting from the cementing operation. The cemented areas shall not contain any trapped air, channels, edge lifts, or excessive wrinkling.

3.4.4 Seams and stitching. Unless otherwise specified, all the seams and stitching used in fabrication shall conform to applicable drawing requirements; and shall be accomplished with Stitch Type 301 conforming to FED-STD-751, with 6 to 10 stitches per inch. All the seam edges shall be properly forced out and shall not contain any folds. No seam shall be twisted, puckered, or pleated, and no part of the container shall be caught in an unrelated operation or seam. All the thread ends shall be trimmed to a length of 1/4 to 3/8 inch. Each row of stitching shall be straight and parallel to the seam edge. The straightness of the stitching, in any row, shall be maintained within a tolerance of 1/32 inch. The ends of the stitching that are not caught in other seams or stitching shall be securely backstitched, by overlapping on itself for at least 1/2 inch. Thread breaks, skips, and run-offs shall be overstitched not less than one inch. The thread tension shall be maintained so that there shall not be any loose or overly tight stitching, and the lock shall be imbedded in the materials sewn together. There shall be no spots or stains resulting from the sewing operation.

3.4.4.1 Bartacking. Unless otherwise specified, the number of stitches per bartack shall be based proportionally upon 7/8 inch long bartacking containing a minimum of 49 stitches. The length and location of each bartack shall be as specified in applicable drawings.

Source: https://assist.dla.mil Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

3.5 Color. The color of the carrying case and components shall be as specified in applicable drawings.

3.6 Markings. Markings shall be in accordance with MIL-STD-130. Ink, color, size, and location of markings shall be as specified in applicable drawings. Letters and numerals 1/4 inch or less in height shall not be stencilled. Serial numbers for the carrying cases shall be assigned by the procuring activity (see 6.2(h)). All markings shall be thoroughly dry prior to packing or packaging. Markings may be applied directly to the specified area, or to a patch securely adhered to the specified area. Material and color of the patch, if used, shall be the same as the carrying case to which applied.

3.7 Visual. When inspected as specified in 4.5.1, the carrying case assemblies, including components, shall conform to the requirements of Paragraphs 3.2 through 3.6. The Classification of Defects for the Visual Examination of the Carrying Case Assemblies, Table II, shall be used to classify and enumerate the defects found.

3.8 Dimensional. When inspected as specified in 4.5.2, the dimensions of the carrying cases, including components, shall conform to applicable drawing requirements. The List of Defects for Finished Dimensions of the Carrying Case Assemblies, Table III, shall be used to classify and enumerate the defects found.

3.9 Preparation for delivery. When inspected as specified in 4.5.3, each of the fully prepared shipping containers, containing carrying case assemblies, selected as a sample unit from the lot, shall conform to the requirements of Section 5. The List of Defects for Preparation for Delivery, Table IV, shall be used to enumerate the defects found.

3.10 Performance inspections.

3.10.1 Strength of attachment of the pull cable assembly. When inspected as specified in 4.6.1, each locking pin, ball, swage, and loop shall withstand a pull of 100 pounds without slippage or deformation.

3.10.1.1 Permanent set of the locking pins. When inspected as specified in 4.6.1.1, each locking pin shall withstand a load of 8 pounds, without taking a permanent set.

3.10.2 Strength of attachment of the carrying case handles. When inspected as specified in 4.6.2, each handle shall withstand a pull of 250 pounds without tearing or separation.

3.11 Workmanship. After completion of the final assembly, the carrying cases shall be thoroughly cleaned and all loose thread, lint, and foreign matter shall be removed. The grommets and snap fasteners

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

shall be clinched without distortion, damage, splitting, or cutting of the cloth, webbing, or tape, as applicable. The metal components shall not be misaligned, nor shall they contain any sharp edge, crack, dent, burr, nick, or sliver. The carrying cases shall not contain any nonspecified hole, abraded area, tear, cut, mend, needle chew, spot, or stain. The carrying cases and components, furnished under this specification, shall conform to the quality and grade of the product as set forth in the specification. The occurence of defects shall not exceed the acceptance criteria established herein.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The examination and testing of the assemblies shall be classified as follows:

(a) First article inspection. First article inspection consists of examinations and tests performed on samples which are representative of the production item after award of a contract to determine that the production item conforms to the requirement of this specification (see 3.1, 4.3, 4.3.1, and 4.3.1.1).

(b) Quality conformance inspection. Quality conformance inspection consists of examinations and tests performed on individual products or lots to determine conformance of the products or lots with the requirements set forth in this specification (see 4.4 through 4.4.1.2).

4.3 First article inspection. The first article inspection of the carrying case assemblies shall consist of all the examination and tests for all the requirements of this specification.

4.3.1 First article samples. Unless otherwise specified, as soon as practicable after the award of the contract or order, the manufacturer shall submit two carrying case assemblies of the type specified in the contract or order. The samples shall be representative of the construction, workmanship, components, and materials to be used during pro-

Source: https://assist.dla.mil - Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

duction. When a contractor is in continuous production of the type specified, from contract to contract, submission of additional first article samples on the new contract may be waived at the discretion of the procuring activity (see 6.2 (d)). Approval of the first article inspection samples or the waiving of the first article inspection does not preclude the requirements for performing the quality conformance inspection. The first article inspection samples shall be furnished to the Government as directed by the contracting officer (see 6.2(e)).

4.3.1.1 First article sample disposition. Upon completion of the first article inspection, recommendations and comments pertinent for use in monitoring production will be forwarded by the Government activity responsible for the inspection program (see 6.2 (e)) to the contracting officer. One of the approved first article samples will be returned to the manufacturer for reference in monitoring production. The other sample will be consumed or destroyed in the inspection program, and shall not be considered as part of the quantity to be delivered under the contract.

4.4 Quality conformance inspection. The sampling and inspection levels shall conform to MIL-STD-105. The quality conformance inspection shall consist of the following:

Pull Cable Assembly Strength of Attachment and Permanent Set

Visual Examination of the Carrying Case Assemblies

Dimensional Examination of the Carrying Case Assemblies

Packaging

4.4.1 Sampling.

4.4.1.1 Inspection lot.

4.4.1.1.1 Carrying case assembly. An inspection lot size shall be expressed in units of one carrying case assembly and components of one type made essentially under the same conditions and from the same materials. The sample unit shall be one carrying case assembly and components of one specific type.

4.4.1.1.2 Packaging. An inspection lot size shall be expressed in units of one fully prepared shipping container, containing assemblies of one type, fully prepared for delivery from essentially the same materials and components. The sample unit shall be one shipping container, containing assemblies of one type, fully prepared for delivery, with the exception that it need not be sealed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

4.4.1.1.3 Adhesive. An inspection lot shall be expressed in units of one batch of adhesive. An inspection lot shall consist of all the batches of the adhesive used by the manufacturer during one day's production of the carrying case assemblies (see 3.4.2). The sample unit shall be one batch of the adhesive used during one day's production of the carrying case assemblies.

4.4.1.2 Sampling for examinations and tests of the carrying case assemblies and components. The sample size, acceptance criteria, examinations, and tests required for the carrying case assemblies and components shall be as specified in Table I.

4.5 Inspection methods.

4.5.1 Visual examination. Each carrying case assembly, including components, shall be visually examined for conformance to the requirements of paragraph 3.7.

4.5.2 Dimensional examination. Each carrying case assembly, including components, shall be dimensionally checked for conformance to the requirements of paragraph 3.8.

4.5.3 Preparation for delivery. Each of the fully prepared shipping containers, containing carrying case assemblies, selected as a sample unit from the lot, shall be visually examined for conformance to the requirements of paragraph 3.9.

4.6 Performance.

4.6.1 Strength of attachment of the pull cable assembly. The strength of attachment of each locking pin, ball, swage, and loop to the cable shall be determined by means of a suitable testing apparatus containing a fixed and movable jaw. The speed of the movable jaw, under no load, shall be 12 $\pm$1/2 inches per minute. To determine the strength of attachment of the locking pins, ball, and swage, insert the cable in the fixed jaw and the item being tested in the movable jaw and apply a load of 100 pounds. When testing the loop, insert a metal rod through the loop prior to attachment to the movable jaw. The items tested shall conform to the requirements of paragraph 3.10.1.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

TABLE I. Sample size, acceptance criteria, examinations, and tests of the carrying case assemblies and packaging.

Inspection	Paragraph		Sample 1/ size	Acceptance criteria
	Requirement	Method		
Pull Cable Assembly, Strength of Attachments and Permanent Set	3.10.1 and 3.10.1.1	4.6.1 and 4.6.1.1	Inspection Level S-1	Acceptance Number, Zero Rejection Number, One
Visual examination	3.2 through 3.7 and applicable drawings	4.5.1	Inspection Level II	An acceptable quality level of 2.5 defects per 100 units for major defects and 6.5 defects per 100 units for total (major and minor combined) defects
Dimensional check	3.8 and applicable drawings	4.5.2	Inspection Level S-3	An acceptable quality level of 4.0 defects per 100 units
Packaging	3.9 and section 5	4.5.3	Inspection Level S-2	An acceptable quality level of 2.5 defects per 100 units

1/ This inspection may be performed either at the contractor's or subcontractor's plant.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects for the visual examination of the carrying case assemblies.

Defects	Major	Minor
General		
a. Any weakening defect such as smash, multiple float, loose slub, needle chew, or abraded area:		
(1) Seriously affecting serviceability or appearance	X	
(2) Not seriously affecting serviceability or appearance		X
b. Color of any component not as specified or contains one or more shade bars		X
c. Any thread end not trimmed to a length of 1/4 to 3/8 inch or loose thread ends		X
d. Any spot or stain:		
(1) Seriously affecting serviceability or appearance	X	
(2) Not seriously affecting serviceability or appearance		X
e. Any non-specified hole, cut, tear, mend or burn.	X	X
f. Any cut edge of the uncoated nylon fibrous materials not seared or contains sharp edges	X	
Metallic components		
a. Any surface rough, misaligned, or contains any crack, nick, burr, sharp edge, dent, or sliver	X	
b. Any surface unclean or contains embedded foreign matter		X
c. Any loose, detached, or otherwise not securely retained	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

TABLE II (Continued)

Defects	Major	Minor
Metallic components (cont'd)		
d. Any malformed, corroded, fractured, broken, chipped, bent, or distorted	X	
e. Any improperly finished:		
(1) Affecting serviceability or appearance	X	
(2) Not affecting serviceability or appearance		X
f. Any snap fastener or grommet misplaced or improperly clinched resulting in cutting of the cloth, tape, or webbing, as applicable	X	
g. Any snap fastener mismated or failing to function properly when snapped closed and unsnapping each of the snap fasteners at least three times	X	
h. Any part of the slide fastener assembly bent, broken, or the movement of the slider interfered with when checked for proper function by opening and closing the slide fastener at least three times, along its entire length	X	
Components and assembly		
a. Any component not as specified or any defect of a component or defect of assembly not herein classified:		
(1) Affecting serviceability or appearance	X	
(2) Not affecting serviceability or appearance		X
b. Any component, component part, or required operation omitted or any operation improperly performed not herein classified:		
(1) Affecting serviceability or appearance	X	
(2) Not affecting serviceability or appearance		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

TABLE II (Continued)

Defects	Major	Minor
Seams and stitching		
a. Accuracy of seaming:		
(1) Any seam, hem, or attachment of any component twisted, puckered, pleated, or caught in an unrelated operation or stitching; any seam edge not properly forced out or contains any fold		X
(2) Ends of stitching that are not caught in other seams or stitching:		
(a) Not securely backstitched	X	
(b) Secure but backstitched for a distance less than 1/2 inch or the backstitching is not overlapped on itself		X
(3) Thread breaks:		
(a) Not securely overstitched	X	
(b) Secure but overstitched for a distance less than one inch		X
b. Gage of stitching:		
(1) Any stitching irregular, unevenly gaged, or various stitchings not uniform, when observed on major portion of the seam		X
c. Open seams 1/:		
(1) 1/2 inch or less		X
(2) More than 1/2 inch	X	
d. Raw edges 2/:		
(1) More than 1/4 inch but not more than one inch		X
(2) More than one inch	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

TABLE II (Continued)

Defects	Major	Minor
Seams and stitching (cont'd)		
e. Seam and stitch type:		
(1) Not specified seam or stitch type	X	
f. Stitch tension 3/:		
(1) Loose tension, resulting in a loose seam or tight tension resulting in breaking of stitches, when normal pull is applied	X	
g. Stitches per inch (only when condition exists on the major portion of the seam):		
(1) Stitches more or less than specified:		
(a) One or two stitches		X
(b) More than two stitches	X	
Cementing operations		
a. Any cementing operation not in accordance with requirements:		
(1) Seriously affecting serviceability or appearance.	X	
(2) Not seriously affecting serviceability or appearance		X
b. Any void or channel in any cementing operation:		
(1) Seriously affecting serviceability or appearance	X	
(2) Not seriously affecting serviceability or appearance		X
c. Excessive wrinkling in any cementing operation		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

TABLE II (Continued)

Defects	Major	Minor
Markings		
a. Missing, incomplete, incorrect, illegible, or improperly located		X

1/ A seam shall be classified as open, when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or runoffs occur. On double stitched seams, a seam is considered open, when either one or both sides of the seam is open.

2/ Any edge that should be turned under and is not, but is securely caught in the stitching, shall be classified as a raw edge. Any raw edge not securely caught in the stitching shall be classified as an open seam.

3/ Puckering is evidence of tight tension or gathering of the material. When puckering is evident, other than the gathering of the material, the seam or hem, as applicable shall be tested by exerting normal pull in the lengthwise direction of the seam, hem, or stitching. Gathering of the material shall be recorded as a puckered seam or hem, as applicable.

TABLE III. List of defects for finished dimensions of the carrying case assemblies

Examine	Defect
Measure the container, and all the visible components, as applicable.	Any measurement deviating from the dimensions and tolerances as specified in 3.8, 4.5.2, and applicable drawings shall be enumerated as a dimensional defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

TABLE IV. List of defects for packaging

Item	Defect
Exterior and interior marking	Missing, incomplete, incorrect, illegible; of improper size, location, sequence, or method of application; information on the label in the polyethylene bag not readable through the film, or no label in the polyethylene bag.
Materials	Any non-conforming component: any component missing, damaged, or otherwise defective.
Workmanship	Inadequate application of the components such as incomplete closure of the unit package, container flaps, loose strappings, etc.: bulging or distortion of the containers: exterior containers contain metal fastenings or stitches; polyethylene bag vent hole missing, open or non-continuous heat sealed seams, or tuck or reverse flap closure missing, when applicable; any portion of the container caught in a heat sealed seam.
Exterior and interior weight	Gross or net weight exceeds the requirement; number per container is more or less than specified; more than one type of container in the same shipping container; not individually packaged within the polyethylene bag; manner of folding damages the container assembly: any metal component not covered as specified.

4.6.1.1 Permanent set of the locking pins. The permanent set of the locking pins shall be determined in accordance with Figure 1. Under a load of 8 pounds, the locking pins shall be observed for conformance to the requirements of paragraph 3.10.1.1.

4.6.2 Strength of attachment of the carrying case handles. The attachment of the handles to the carrying case shall be inspected for strength of attachment in a suitable testing apparatus having a fixed jaw and a movable jaw. The speed of the movable jaw, under no load, shall be 12 ±1/2 inches per minute. The direction of pull shall be perpendicular to the point of attachment. The handle being tested shall be subjected to a load of 250 pounds and observed for conformance to the requirements of paragraph 3.10.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. Packaging shall be Level A or commercial as specified (see 6.2 (f)).

5.1.1 Level A. Each carrying case assembly shall be fully zippered and the snap fasteners, snap hook, "D" ring, and snap assembly, as applicable, shall be properly engaged. The snap hook, "D" ring, loop, slide, and snap assembly, as applicable, shall be individually wrapped with MIL-B-121 Grade A barrier and taped with natural cushioning material conforming to PPP-C-843, Type II, Class B or C, PPP-C-1752 or PPP-C-1797 or PPP-C-795 or PPP-C-1842 to prevent damage to the components of the carrying cases or to the carrying case assemblies by puncture or abrasion. Each of the carrying case assemblies shall be neatly folded in half, in a manner that shall prevent blocking or damage to the container assembly or the components. Each folded container assembly shall be inserted into a snug fitting bag conforming to MIL-B-117 Type I, Class b, Style 2. A white paper label containing MIL-STD-129 markings shall be inserted in the bag prior to heat sealing. One corner of each bag shall contain a 1/4-inch-diameter hole to allow the excess air to escape. As an alternate, the final closure of the bag may be accomplished by the use of a tuck or reverse flaps. No part of the container assembly shall be caught in a heat sealed seam. Each bagged container assembly shall be placed within a snug-fitting corrugated fiberboard container conforming to PPP-B-636, Type CF class weather resistant, which shall be tape sealed as specified in the appendix thereto.

5.1.2 Commercial. The containers shall be packaged in accordance with the contractors commercial practice in containers to afford the degree of protection necessary to prevent deterioration or damage during shipment and short tenure storage under the normal hazards of environmental conditions and commercial mode of transportation utilized.

5.2 Packing. Packing shall be Level A, B, or Commercial as specified (see 6.2 (f)). Each shipping container shall contain carrying case assemblies of only one type.

5.2.1 Level A. Carrying case assemblies unit packed as specified in 5.1.1 or 5.1.2, shall be packed in a fiberboard container conforming to PPP-B-636 Class Weather-Resistant, Grade V3c or V3s. In addition, the container shall be strapped in accordance with the appendix to PPP-B-636.

5.2.2 Level B. Carrying case assemblies unit packed as specified in 5.1.1, shall be packed within fiberboard boxes conforming to PPP-B-636, Type CF or SF, Domestic Class.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

5.2.3 Commercial. The carrying case assemblies unit packed as specified 5.1.1 or 5.1.2, shall be packed within exterior type shipping containers in a manner that will insure safe transportation at the lowest rate to the point of delivery. The shipping containers shall conform to the uniform classification rules and regulations applicable to the mode of transportation selected.

5.3 Marking. In addition to any special markings required by the contract or order (see 6.2 (g)), the unit intermediate and shipping containers shall be marked in accordance with MIL-STD-129 and shall include the date of manufacture (month and year).

6. NOTES AND CONCLUDING MATERIAL

6.1 Intended use. The carrying case assemblies covered by this specification are intended to be used as a convenient means of protecting and carrying multi-place inflatable life rafts that are used by aircrewmen to enhance their chances of survival in the event of ditching at sea.

6.2 Ordering data. Procurement documents shall specify:

(a) Title, number, and date of this specification, including any revisions or amendments.

(b) Type, Government part number, and quantity desired.

(c) Applicable drawings, including revisions (see 3.3).

(d) Whether First Article Inspection is waived (see 4.3.1).

(e) Name and address of First Article Inspection Laboratory (see 4.3.1), and the name of the Government activity responsible for conducting the First Article Inspection Program (see 4.3.1.1).

(f) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

(g) Whether any special markings are required (see 5.3).

(h) Issuance of a block of serial numbers to cover the individual serialization of the carrying case assemblies, for the quantity to be purchased (see 3.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

(i) Certificate of compliance for:

(1) Material and components conforming to applicable specifications, standards, and drawings (see 3.2).

(2) The age of the materials and components (see 3.2).

6.3 Data. For the information of Contractors and Contracting Officers, any of the data specified in applicable documents listed in Section 2 of this specification, or referenced lower-tier documents need not be prepared for the Government, and shall not be furnished to the Government unless specified in the contract or order. The data to be furnished shall be listed on DD Form 1423 (Contractor Data Requirements List), which shall be attached to, and made a part of, the contract or order. NAVAIR Form 4200/30 (Drawings, Lists, and Specifications Required) shall be attached where applicable.

6.4 First article. When a first article is required, it shall be tested under the appropriate provision of 7-104.55 of the Defense Acquisition Regulations. The first article should be a preproduction sample. The contracting officer should include specific instructions for examinations, tests and approval of the first article.

Preparing Activity:
Navy -AS
(Proj. No. 4220-0259)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

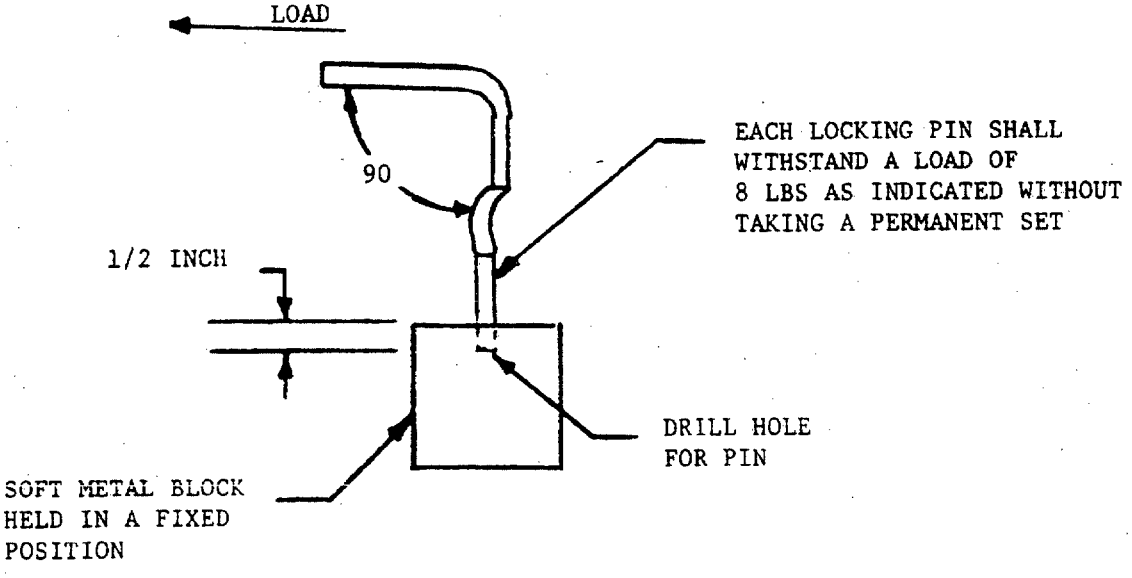


FIGURE 1. Inspection procedure for permanent set of locking pins

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, New Jersey 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316



Engineering Specifications and Standards Department (Code 93)
Naval Air Engineering Center
Lakehurst, New Jersey 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-85361

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.