MILITARY SPECIFICATION

SHIRTS, UTILITY, MEN'S, CHAMBRAY

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for chambray work shirts.

1.2 Classification. The shirt shall be in the following types and sizes (see 6.2).

* 1.2.1 Types.

Type I - Short Sleeve, Polyester/Cotton
Type II - Long Sleeve, Polyester/Cotton
Type III - Long Sleeve, Cotton, Flame Resistant

1.2.2 Sizes.

Extra Small	(13 - 13 1/2)
Small	(14 - 14 1/2)
Medium	(15 - 15 1/2)
Large	(16 - 16 1/2)
X-Large	(17 - 17 1/2)

1.2.3 Schedule of sleeve lengths (Type II and III shirts). The Type II and III shirts shall be furnished in sleeve lengths of 32, 34 and 36 (see 3.8).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to. Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
NN-P-71	- Pallets, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
DDD-L-20	- Label; for Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-P-15011	- Pallet, Material Handling, Wood Post Construction, 4-Way Entry
MIL-B-17757	- Box, Shipping Fiberboard (Modular Sizes)
MIL-C-24916	- Cloth, Chambray, Cotton (Flame Retardant Treated)
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-87065	- Cloth, Chambray, Polyester and Cotton

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-1492	- Provisions for Evaluating Quality of Shirts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent OF Documents, U.S. Government Printing Office, Washington, D.C. 20402-0001.)

* 2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808.)

THE COLOR ASSOCIATION OF THE UNITED STATES

Standard Shades for Buttons

Standard Shades for Threads

(Applications for copies of color cards should be addressed to The Color Association of the U.S., 343 Lexington Ave., New York, NY 10016.)

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material.

3.3.1.1 Type I and II. The basic material for the Type I and Type II shirt shall be a 50%/polyester/50%/cotton chambray material conforming to MIL-C-87065. The color shall be shade Blue 3372.

3.3.1.2 Type III. The basic material for the Type III shirt shall be a flame retardant treated cotton chambray conforming to MIL-C-24916. The color shall be shade Blue 3372.

3.3.2 Thread.

* 3.3.2.1 Thread, polyester core. The thread for all shirts shall be a polyester core thread, shade Blue, C.A. 66091, in accordance with the Standard Shades for Threads, conforming to MIL-T-43548, except that the polyester covering shall not be used. Two or 3 ply thread may be used for all ticket numbers.

* 3.3.2.2 Thread size. The following thread sizes shall be used with the appropriate stitch type:

Stitch type	Thread size	
	Needle	Bobbin/looper
301	50	50
401	50	70
503, 504, 602	70	70
515, 516, 519	50	70 (chain)
	70	70 (overedging)
Button sewing	50	-
Bartack	50	50

* 3.3.2.3 Colorfastness. The dyed thread of 3.3.2.1 shall show colorfastness to light and laundering equal to or better than the standard sample when tested as specified in MIL-T-43548. As a limit of acceptability or when no standard sample is available, the dyed thread of 3.3.2.1 shall show a minimum of "good" colorfastness to light and laundering when tested as specified in MIL-T-43548.

3.3.3 Buttons. The buttons shall be 20-line, conforming to Type II, Class D, style 29 of V-B-871. The color of the button shall be Blue, C.A. 62037, in accordance with the Standard Shades for Buttons.

3.3.4 Label.

* 3.3.4.1 Combination label. Each shirt shall have a combination identification, instruction and personal label conforming to Type III, IV, or Type VI, Classes 10 and 15 of DDD-L-20. The marking shall show colorfastness to laundering. The inscription and format shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

* Type I and II Shirt Label

NAME:
SERVICE NO:
SHIRTS, UTILITY, MEN'S CHAMBRAY - TYPE II (Example)
FIBER CONTENT: 50% Cotton/50% Polyester
CONTRACT NO. DLA-100-00-0-0000 (Example)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (If other than contractor)

LAUNDERING INSTRUCTIONS

Machine Wash, Hot Water, No Bleach
Tumble Dry, Medium Heat
Remove Promptly
or
Follow NAVEDTRA Manual 414-01-45-81, Formula II

* Type III Shirt Label

NAME:
SERVICE NO:
SHIRTS, UTILITY, MEN'S CHAMBRAY - TYPE III
FIBER CONTENT: 100% Cotton (Flame retardant treated)
CONTRACT NO. DLA-100-00-0-0000 (Example)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (If other than contractor)

LAUNDERING INSTRUCTIONS

Machine Wash, Hot Water
NO STARCH, NO BLEACH
Tumble Dry, Medium Heat
Remove Promptly
or
Follow NAVEDTRA Manual 414-01-45-81, Formula II

The printed label should use uppercase letters, bold print and underlining as indicated above.

3.3.4.2 Size label. Each shirt shall have a size label conforming to Type III, IV or VI, Class 2 of DDD-L-20. The inscription shall be as follows:

Type I Shirt
M - (Example)
STOCK NO. 8405-00-000-0000 (Example)

Type II or III shirts
M - 34SL (Example)
STOCK NO. 8405-00-000-0000 (Example)

Abbreviations for the applicable size shall be XS for Extra Small; S for Small; M for Medium; L for Large; XL for Extra Large; and SL for Sleeve Length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

3.4 Design. The Type II and III long sleeve shirts shall be made with a convertible collar and have a seven button front (Extra Small and Small shall have a six button front), shirt tails and two outside breast patch pockets with buttoned down flaps. The collar, pocket flaps and cuffs shall be interlined with basic material. The squared-off sleeve cuffs shall have two buttons on each cuff and the sleeve openings shall have a continuous binding (see Figure 2).

The Type I shirt shall be similar in design and construction features except that it shall have short sleeves (see Figure 1).

3.4.1 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the specification and the figures, the specification shall govern.

* 3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are allowed on the working patterns. The patterns provide an allowance of 3/8 inch for safety stitched seams and 5/16 inch for collar assembly and joining to neck. Unless otherwise indicated in Table I, seams shall be in accordance with these seam allowances.

* 3.5.1 Pattern parts. The component parts shall be cut from the material as specified and in accordance with the following list of pattern parts:

Material	Pattern Parts	Cut Parts	
Basic material	Back	1	
	Front (left and right)	2	
	Sleeves		
	Type I (short)	2	
	Type II and III (long)	2	
	Collar (top and under)	2	
	Cuff (Type II and III)	4	1/
	Sleeve binding (Type II and III)	2	2/
	Pocket (patch)	2	
	Pocket (patch) alternate	2	
	Pocket flap	4	
	Cuff interlining	2	
	Pocket flap interlining	2	
	Collar interlining	1	
Templates	Template finished pocket	-	
	Template finished flap	-	

1/ When one piece cuff is utilized, delete seam allowance to meet requirements.

2/ See operation 9e when sleeve binding pattern is not used and sleeve binding is rolled.

3.6 Construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

3.6.1 Stitches, seams and stitchings. Stitch, seam and stitching types, as specified in Table I shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitchings are given for the same operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the shirt. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitchings. The width of the safety stitch shall be 3/8 inch and the guides and knives on the safety stitch machine shall be set to trim only the raveled ends of the fabric.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

* 3.6.3 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks may be repaired by using 301 stitch type. The ends of type 401 stitching not caught in other stitching or seams shall have a 1/2 to 3/4 inch chain extending from it. When ends of overedge stitching are not caught in other seams or stitching, the ends shall be tacked.

3.6.4 Buttonholes. The buttonholes shall be straight style with both ends securely barred. The finished cut length shall be 5/8 (± 1/16) inch.

3.7 Manufacturing operations requirements. The shirts shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished shirts are identical to that produced by following the sequence listed in Table I.

3.7.1 All pressing operations referenced in Table I shall be performed by using a heated pressing iron or steam pressing machine.

3.7.2 Abbreviations in table of operations. The abbreviations used in Table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
1.	Cutting					
*	a. All components of the basic cloth shall be cut in strict accordance with patterns furnished, which show size, shape, placement of pockets and flaps, directional lines for cutting and notches for proper assembly of all parts. The fronts may be cut to include the selvage with the grown-on facing. Note the directional line for cutting must be maintained, resulting in a straight facing.					
*	b. All component parts shall be cut from one piece of material except for undercollar, underply of pocket flaps, underply of cuffs, all interlinings and sleeve binding, which may be cut from ends. When parts are cut from ends, they must approximate the shade of the main assembly.					
	c. The sleeve binding may be cut in strips and placed on rolls. There shall be no visible mends or seams on the finished shirt and the shade of the binding must approximate the shade of the shirt.					
	d. The cuffs may be cut in the warp or filling direction.					
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified in MIL-STD-1492 shall be removed from production and replaced with non-defective and properly matched material.					
3.	Shade and size markings a. All parts shall be bundled, marked, or ticketed to insure proper shade and size identification, except parts cut from ends.					
	b. The use of corrosive metal fastening devices or machine sewn-on tickets shall be prohibited.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	c. The use of ink pad numbering machine, rubber stamp, or pencil will be permitted provided the numbers do not show through the outside of the garment and the numbers are covered by the seam allowance.					
4.	Make patch pockets					
	a. Overedge stitch top raw edge of pockets. Fold the top edge of pocket as indicated by pattern marks forming the hem.	503 504 or 602	Efd-1	8-12		
	b. The pockets may be creased on an edge creasing machine to insure uniformity of size and shape before stitching to the shirt.					
5.	Attach pockets					
	a. Set pockets to shirt, according to marks on pattern, edgestitching 1/16 inch from folded edge along the bottom and sides.	301	LSd-1	8-12		
	b. Backstitch 3/4 inch each end of pocket opening with the backstitch superimposed upon pocket stitching.	301	smlr to LSd-2	8-12		
	or					
	c. The top corners of the pocket may be tacked with a triangle stitching. The base of the triangle (1/8 to 3/16 inches long) shall be at the top of the pocket with the apex 1/2 to 3/4 inches below the top of the pocket.	301	smlr to LSd-2	8-12		
	d. The finished pocket for all sizes shall measure 5 (+ 1/8) inches wide and 5-1/2 (+ 1/8) inches deep at center of pocket.					
	Note: The finished pocket shall be checked for size and uniformity against the finished pocket template.					
6.	Make pocket flaps					
	a. Join the plies of the pocket flaps and interlining along sides and pointed edge, 1/4 inch from raw edges.	301 or 401	SSe-2(a)	8-12		
	b. Turn to finished position, working corners and seams out smooth and flat to edges.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	c. Topstitch sides and pointed edge 1/16 inch from turned edge.	301	SSe-2(b)	8-12		
7.	Attach pocket flaps					
*	a. Position flaps on shirt as indicated by marks on pattern and stitch 1/8 inch from raw edge.	301	LSbl-2(a)	8-12		
*	b. Turn flaps down and topstitch 1/4 inch from folded edge. Backstitch ends of topstitching.	301	LSbl-2(b)	8-12		
	c. The finished flap shall measure 5-1/4 (± 1/8) inches wide, 1 3/4 (± 1/8) inches deep at the sides and 2 1/2 (± 1/8) inches deep at the center for all sizes.					
	Note: The finished flap shall be checked for size and uniformity against the finished flap template.					
8.	Join shoulder seams.					
	a. Stitch the back and fronts at shoulder seams.	301 or 401	SSa-1	8-12		
	b. Overedge stitch the edges together.	503, 504 or 602	SSa-1	8-12		
	or					
	c. Operations 8a and 8b may be performed in one operation by simultaneously stitching and overedging.	515, 516 or 519	SSa-2	8-12		
*	d. The seam allowance shall be turned towards the back.					
9.	Make sleeve openings (Type II or III)					
	a. Bind sleeve openings with a continuous 2 inch wide strip of basic fabric. Fold strip in half, turn raw edges of bindings inside 1/4 to 5/16 inch and insert edges of sleeve opening, aligning raw edges of binding and sleeve opening. Stitch through all plies of material, according to marks on pattern, 1/16 inch from folded edge of binding.	301 or 401	BSc-1	8-12		
	or					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	A folder may be used to perform this operation.					
	b. Fold and turn opening to finished position with the top binding forming a facing. Stitch or tack 1/8 to 1/4 inch below top of opening, through top binding and sleeve, the full width of facing. An automatic tack may be used.	301 or hand or Brtck	SSv-1	8-12 6-8 per tack 24-28 per Brtck		
	c. The finished facing shall measure 5/8 to 3/4 inch in width.					
	d. The finished sleeve opening shall measure 5 to 5 1/4 inches long, exclusive of cuffs.					
	or					
	e. As an alternate, the sleeve bindings may be furnished on rolls. When this option is exercised, the binding shall be cut in the warp direction approximately 2 inches wide. The finished sleeve facing shall measure 5/8 to 3/4 inch wide.					
10.	Set sleeves to armholes.					
	a. Stitch the sleeves to the armholes.	301 or 401	SSa-1	8-12		
	b. Overedge stitch the raw edges together.	503 504 or 602	SSa-1	8-12		
	or					
	c. Operations 10a and 10b may be performed in one operation by simultaneously stitching and overedging.	515 516 or 519	SSa-2	8-12		
*	d. Seam allowance shall be turned towards body of shirt or sleeves. Both armhole seams shall be turned in the same direction.					
11.	Join side seams and underarm seams.					
	a. Stitch the side seams and underarm seams in one operation, face to face.	301 or 401	SSa-1	8-12		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	b. Overedge stitch the raw edges together.	503 504 or 602	SSa-1	8-12		
	or					
	c. Operations 11a and 11b may be performed in one operation by simultaneously stitching and overedging.	515 516 or 519	SSa-2	8-12		
	d. Turn side and underarm seam flat, with seam allowance toward back. (See operation 16c).					
12.	Make and set cuff - Type II or III shirt.					
*	a. Align evenly the bottom and side edges of the outer cuff ply and interlining. Align the bottom edge of the inner cuff ply with the bottom edges of the outer cuff ply and interlining. Fold top edge of the outer cuff ply over and even with the top edge of interlining and stitch 1/4 to 5/16 inch from folded edge catching interlining in the stitching.	301 or 401	SSbc-1	8-12		
	b. Stitch plies of cuff and interlining 1/4 inch from edge, along bottom and sides. Turn to finished position and stitch 3/16 inch from folded edge. The topstitching shall finish 1/2 (+ 1/8) inch from top edge of finished cuff or may taper to edge of cuff at end of stitching and need not be back stitched.	301 or 401 and 301	SSe-2(a) and SSe-2(b)	8-12 8-12		
	or					
	c. As an alternate when cuff is cut as one piece: Fold cuff in half lengthwise, superimpose interlining and stitch sides together 1/4 inch from raw edge. Turn to finished position and top stitch bottom and side edges of cuff 3/16 inch from folded edge. The top stitching on the side of the cuff shall finish 1/2 (+ 1/8) inch from top edge of finished cuff. The top stitching may taper to edge of cuff at ends of stitching and need not be backstitched.	301 or 401 and 301	SSe-2	8-12		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	d. Stitch the top edge of the inner ply of cuff to the bottom edge of sleeve 1/4 inch from edge, putting pleat in sleeve according to marks on pattern, with folded edge facing the sleeve opening.	301	SSa-1	8-12		
	e. Turn cuff to finished position and stitch to bottom of sleeve, 1/16 inch from the folded top edge on the outside.	301	LSb-1	8-12		
13.	Hem sleeve (Type I shirts)					
	a. Form a hem on the bottom of the sleeve with edge turned under.	301	EFb-1	8-12		
	Note: The hemming of sleeve may be performed before or after joining of underarm seam.					
	b. The finished hem shall measure 7/8 to 1 inch in width.					
	c. When sleeve is hemmed prior to joining underarm seams, end of seam shall be backtacked not less than 3/8 inch, or a horizontal bartack shall be placed across seam allowance, at the end of the underarm seam 3/16 to 1/4 inch from bottom of sleeve.	301 or Brtck	SSa-1	10-12 21-28 Brtck		stchs/
*14.	Make collar.					
	a. Join the three plies of collar together along outside edges with the top and bottom collar face to face.	301 or 401	SSe-2(a)	8-12		
	b. Trim corners, turn, work out edges and press points on a collar pointing machine.					
	c. Topstitch collar 3/16 inch from folded edge.	301	SSe-2(b)	8-12		
	d. (Optional) Stay stitch bottom of interlining to topcollar.	301	SSa-1	8-10		
15.	Attach collar to body of shirt.					
	a. Turn and fold under back of inner raw edge of each facing, 3/16 to 1/4 inch and stitch (through facing only) 1/16 inch from folded turned edge. When the fronts are cut to include the selvage, this operation is not applicable.	301	EFb-1	8-12		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	b. Fold back left and right fronts, face to face at notch to form facing.					
	c. Stitch collar between the front and facing from the notch for a distance of 1-5/8 (± 1/8) inches. At these points, notches shall be made through all plies by the operator.	301	SSa-1	8-12		
	d. Stitch the undercollar to back at neckline between the notches made by the operator.	301	BSg-2(a)	8-12		
	e. Turn facings to finished position.					
*	f. Turn under raw edges of top collar and interlining and topstitch 1/16 inch from folded edge simultaneously catching the ends of facing in the stitching. The Type VI size label shall be stitched in the center of the collar.	301	BSg-2(b)	8-12		
	NOTE: Any fullness in topcollar, undercollar or interlining is not permitted.					
16.	Hem fronts and backs.					
	a. Fold under the bottom of the fronts and backs with the raw edge turned under 3/16 to 1/4 inch; and stitch through all plies of material 1/16 inch from inner folded edge of hem.	301	EFb-1	8-12		
	b. The finished hem shall measure 1/4 to 5/16 inch wide.					
*	c. The side seams shall be turned in the same direction as turned at the cuff (see operation 11d).					
17.	Make buttonholes (see 3.6.4)					
	All shirts shall have seven buttonholes in the left front (except extra small and small which shall have six), one buttonhole in each pocket flap, and one buttonhole in each cuff (Types II and III).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
	a. Make one horizontal buttonhole at top of left front with nearest end of buttonhole 1/2 (+ 1/8) inch from front edge and 3/8 (+ 1/8) inch below neckline.	Button-hole		42-46 per button-hole not includ-ing tacks.	
	b. Make one vertical buttonhole, centered in each pocket flap 3/4 inch from the lower edge. The measurement shall be taken from center of buttonhole.				
	c. Make a buttonhole centered and parallel to the long edge of each cuff 3/8 to 1/2 inch from edge. (Type II and III). The measurement shall be taken from closest end of buttonhole.				
	d. Make six vertical buttonholes in the left front (except extra small and small which shall have five) 3/4 (+ 1/8) inch from edge of front and spaced as follows:				
	(1) The second buttonhole shall be placed in direct line with the pocket flap buttonholes.				
	(2) The first buttonhole shall be placed midway between the second buttonhole and the collar buttonhole (operation 17a).				
	(3) The four or three other buttonholes shall be spaced the same distance apart as the first and second buttonholes.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
18.	Sew on buttons a. All buttons shall be in line with corresponding buttonholes.					
	b. Sew seven buttons securely by machine (except Extra Small and Small which shall have six) on right front with center of button 3/4 (± 1/8) inch from front folded edge of facing, corresponding to respective buttonholes.	301 or 101		14-16 per button 20-22 per button		
	c. Sew a button on each pocket to correspond with buttonhole in pocket flap. NOTE: The button shall be sewn through all plies of the pocket hem.	301 or 101		14-16 per button 20-22 per button		
	d. Sew two buttons on each cuff aligned and centered to correspond with buttonholes in cuffs; with center of first button 1/2 (± 1/8) inch from edge and center of second button placed one inch from the center of first (Type II and III).	301 or 101		14-16 per button 20-22 per button		
19.	Marking. a. The combination identification, instruction and personal marking shall be legibly stamped on the face side of the left shirt tail with the bottom of the label 1/2 to 3/4 inch from the hemmed bottom and the side of the label 1 to 1-1/2 inches from the front folded edge.					
*	b. The applicable shirt size and sleeve length, when applicable, shall be legibly marked and centered (3/8 inch tolerance) on the top collar with the top of the marking not more than 3/4 inch above the bottom edge of top collar.					
	c. The printing shall be legible without smears. or					
	d. A printed label shall be sewn to front located as specified in 19a.	301	LSbj-1	8-12		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
20.	Clean shirts a. Trim all thread ends inside and out. b. Remove all loose threads inside and out. c. Remove all spots, stains, and shade tickets. NOTE: Caution shall be made so not to harm the material when trimming.					
21.	Press shirts a. The entire shirt shall be neatly pressed with a heated iron or pressing machine. NOTE: The use of steam inflated bag type machine is prohibited for pressing. b. Button shirt except for top button.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Sizes and measurements of the finished shirts shall be as shown in Table II (see Figure 1 and 2). All measurements are expressed in inches.

Table II - Sizes and finished measurements

Size	A Chest	B Back Length	C Sleeve lengths		D Collar
			Type I	Type II and III	
Extra small	36-1/2	31-3/8	6	32	13
Small	40-1/2	31-1/2	6	32,34	14
Medium	44-1/2	31-3/4	6	32,34,36	15
Large	48-1/2	32	6	34,36	16
Extra Large	52-1/2	32	6	34,36	17
Tolerances	+ 1, - 1/2	+ 1, - 1/2	± 1/2	+ 1, -1/2	+1/2, -1/4

NOTE: A, B, C, and D refer to Figures 1 and 2. A, B, and C measurements shall be taken with the shirt buttoned, laid flat, and smooth.

A. Chest. Twice the measurement taken across the front at the base of the armhole from folded edge to folded edge.

B. Back length. Back length shall be taken along the center of the back from undercollar seam to bottom edge of shirt.

C. Sleeve length. (Type I) Measure from base of armhole (junction of seams) along inseam to bottom of sleeve.

(Type II and III) Measurement shall be taken from center of back at undercollar seam, diagonally across back along sleeve to top fold at bottom edge of cuff.

D. Collar. Measurement shall be taken along base of collar, from collar edge to collar edge.

3.9 Workmanship. The finished shirts shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article submitted in accordance with 3.2 and 6.2 shall be inspected as specified for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-1492.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents.

* 4.4.2 Examination of the end item. The end item examination provisions for the finished shirts shall be as specified for Utility (U) in MIL-STD-1492 and in accordance with the list below:

DEFECT	"U" POINT VALUE
Pocket(s) or Flap(s)	
a. Not Uniform in size or shape - any measurement, varying from pocket to pocket or flap to flap or pocket or flap to template by:	
1. More than 1/4 inch	2
2. 1/8 inch up to 1/4 inch (inclusive)	1
Collar	
a. Any fullness in undercollar, topcollar or interlining.	2

4.4.3 Packaging inspection. Packaging inspection shall be in accordance with MIL-STD-1492.

4.4.4 Palletization examination. An examination shall be made to determine

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be Level A or C as specified (see 6.2).

5.1.1 Level A. Each fully buttoned shirt shall be neatly folded to measure approximately 14-1/2 inches by 10-1/2 inches. The folded shirt shall be secured with stainless steel (AISI type 304 or 316) pins, aluminum clips or plastic fasteners. Each shirt shall be inserted in a snug-fitting flat style clear polyethylene film bag of 0.00125 inch thickness (± 25 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type in which case a heat seal closure and corner vent hole are not required.

5.1.2 Level C. Shirts shall be packed to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be Level A, B, or C as specified (see 6.2.).

* 5.2.1 Level A. Twenty-four (24) Type I, II or III shirts of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to Type CF, Class Weather-Resistant, Variety DW, Grade V15c, size 2A of MIL-B-17757. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

fiberboard for the box liner shall conform to Type CF, Class Domestic of MIL-B-17757. Level A packages shall be packed flat two in length, one in width, and twelve in depth for Types I, II or III shirts. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of one type only may be packed within the same shipping container.

* 5.2.2 Level B. Twenty-four (24) Type I, II or III shirts of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to Type CF, Class Domestic, variety DW, Grade 200, size 2A of MIL-B-17757. The fiberboard for the box liner shall conform to Type CF, Class Domestic, of MIL-B-17757. Level A packages shall be packed flat two in length, one in width, and twelve in depth for Types I, II and III shirts. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of one type only may be packed within the same shipping container.

5.2.3 Level C. Shirts packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Container shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.2.4 Palletization. When specified (see 6.2) item packed as specified in 5.2 shall be palletized on a 4-way entry pallet in accordance with load Type 1a of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from, wood groups I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified, of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

* 5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 4 by 5 inches with the words "Mixed NSN'S" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and national stock numbers contained therein.

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The shirts are intended to be worn with the utility trousers by Navy enlisted personnel stationed aboard ships (Type III) and at shore bases (Type I and II) in performance of multi-type indoor and outside duties.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Type and sizes required (see 1.2).
c. Selection of applicable levels of packing and packaging (see 5.1 and 5.2).
d. When first article inspection is required (see 3.2), the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval.
e. When palletization is required (see 5.2.4).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.5 Subject term (key word) listing.
Fabric, chambray
Fabric, cotton
Fabric, flame retardant treated
Fabric, poly/ cotton blend
Garment, utility

Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8405-N038

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

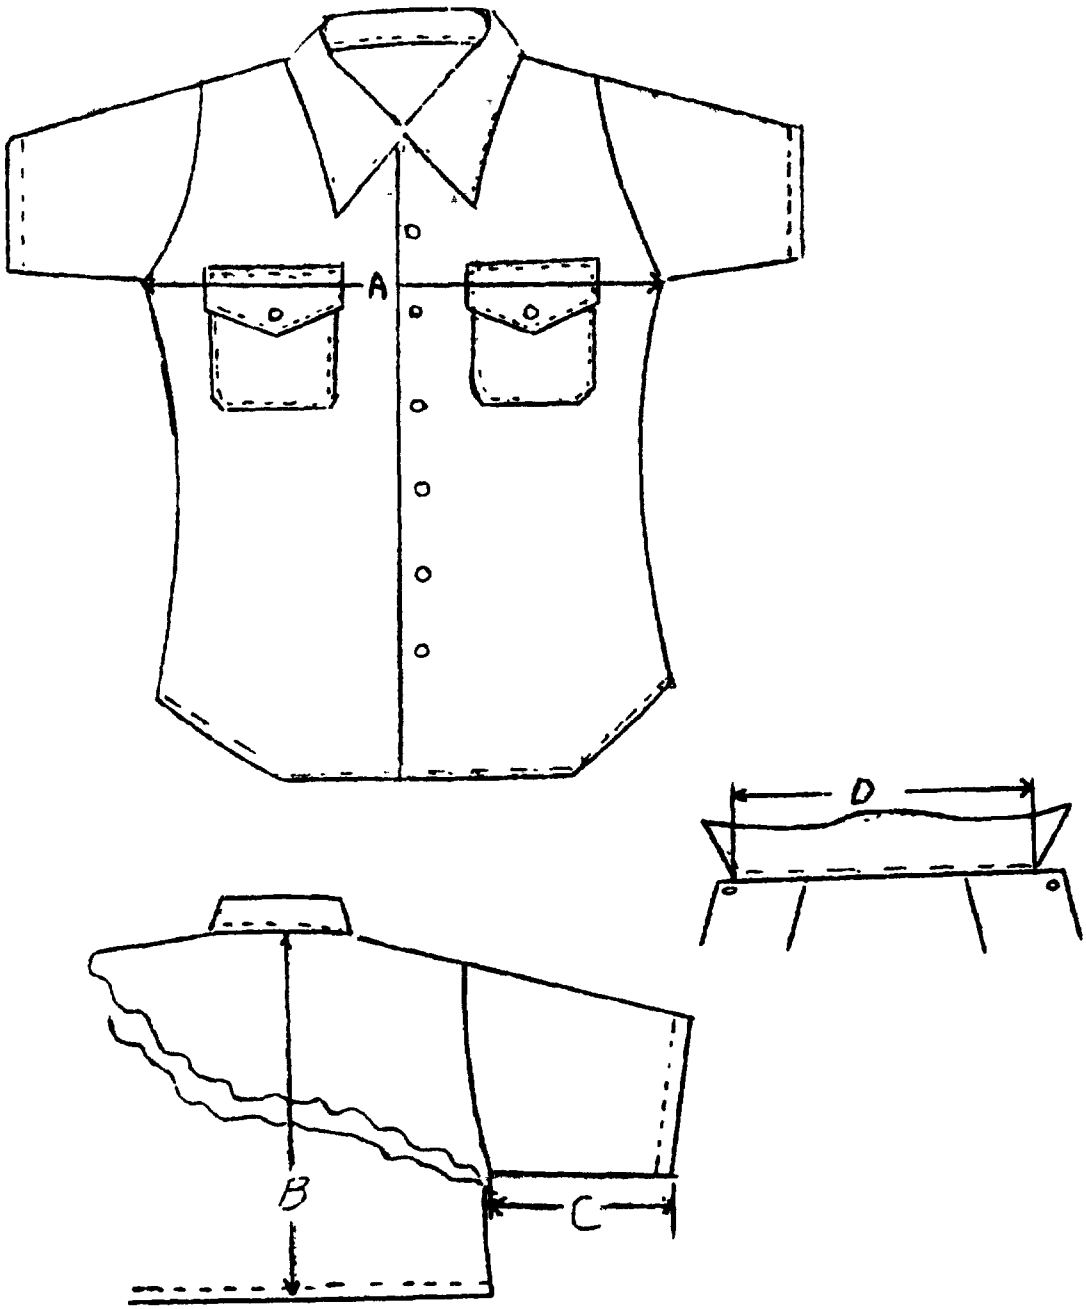


Figure 1 - Shirts, Utility, Men's Chambray Type I

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

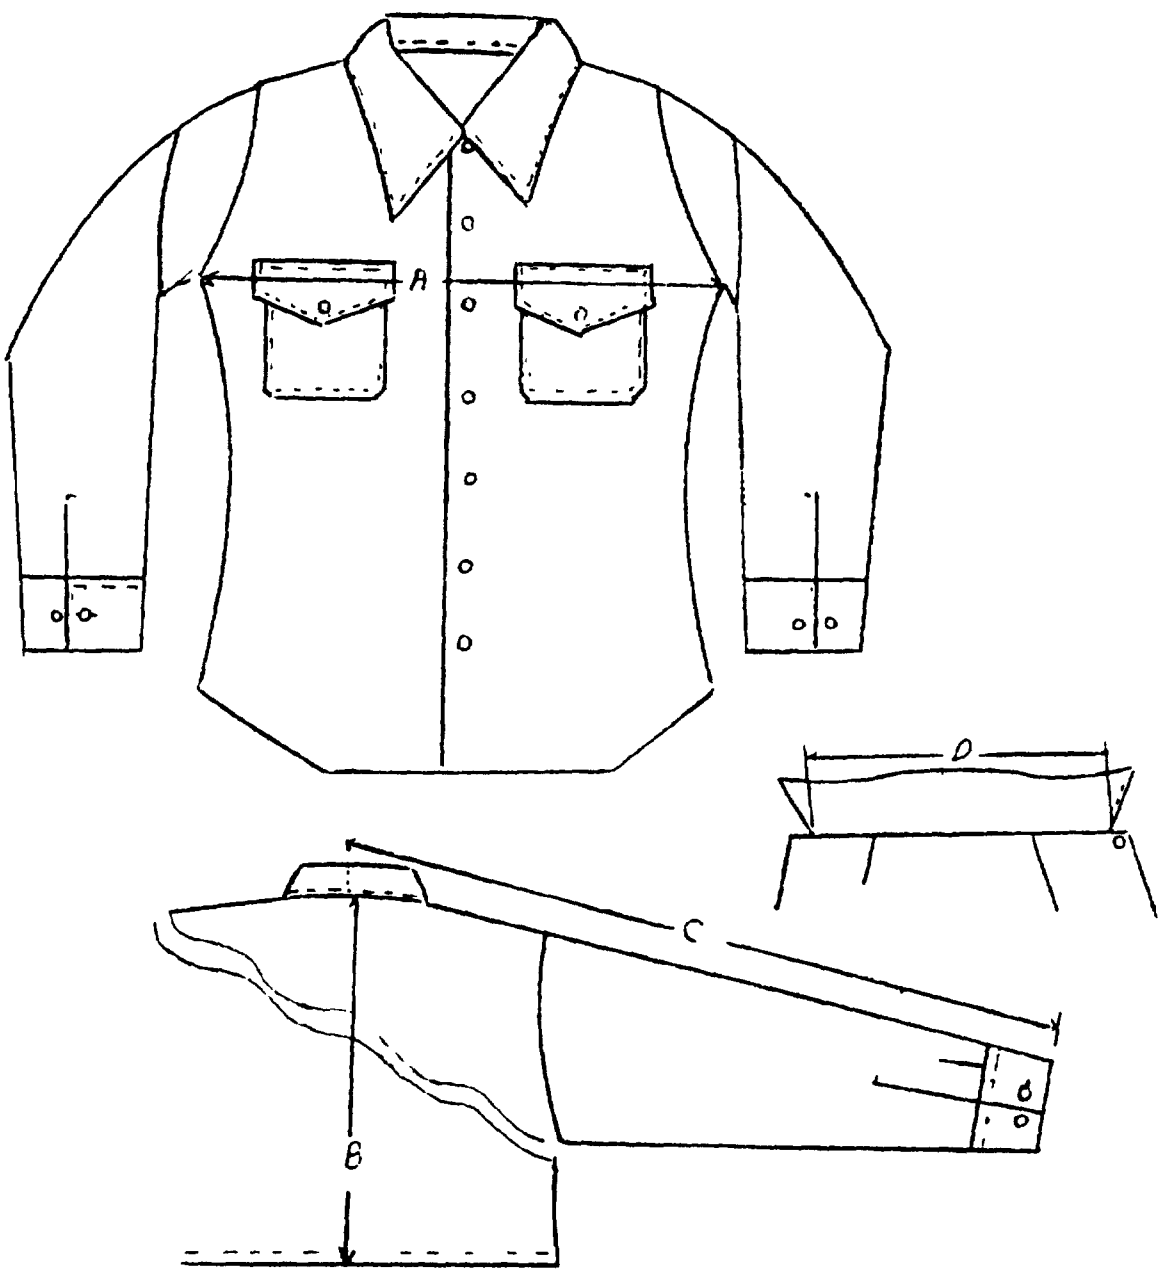


Figure 2 - Shirts, Utility, Men's Chambray Types II and III

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our specifications better, the DoD provides this form for use in submitting comments and suggested changes. Contractors are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
21 Strathmore Road (Code 50)
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-87060B(NU)	SHIRTS, UTILITY, MEN'S, CHAMBRAY

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*. _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b Recommended Wording

c Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:40Z
Check the source to verify that this is the current version before use.