INCH-POUND
A-A-59126/18B
22 March 2021
SUPERSEDING
A-A-59126/18A
31 May 2011

COMMERCIAL ITEM DESCRIPTION SHEET

TERMINALS, STUD (INSULATED)
STYLE SE18

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Style SE18 of MIL-T-55155/18 for all federal agencies.

The requirements for acquiring the product described herein shall consist of this sheet and the latest issue in effect of CID A-A-59126.

REQUIREMENTS:

Dimensions and configuration: see Figure 1.

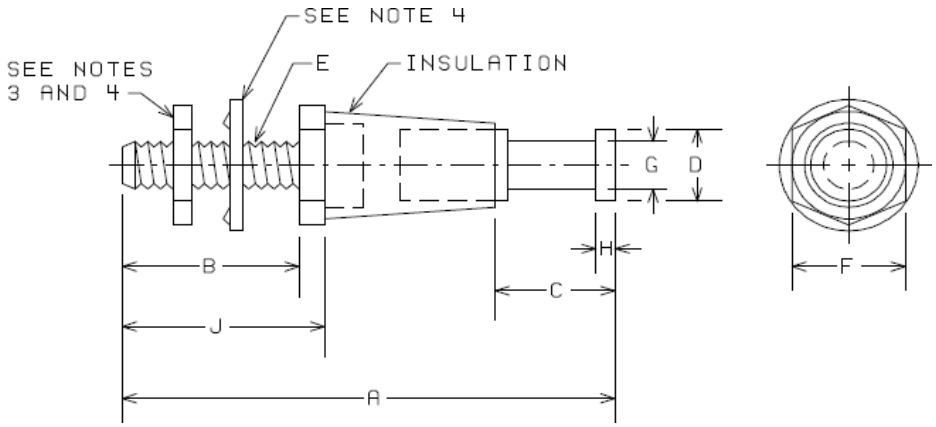


Figure 1. Configuration and Dimensions

Comments, suggestions, or questions on this document should be emailed to usarmy.apg.ccdc-c5isr.mbx.standardization-crx@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

PART NUMBER	DIMENSIONS								
	A	B	C	D	E	F	G	H	J
AA59126/18--01	.593	.218	.156	.093	No. 2-56 UNC-2A	.156	.055	.020	.264
AA59126/18--02	.750								

Figure 1. Configuration and Dimensions (continued)

Figure 1 Notes:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±0.005 inch.
3. Hex nut, brass, No. 2-56 UNC-2B x 0.06 inch thick x 0.19 inch across flats.
4. The washer and hex nut shall be plated with a finish that is electrolytically compatible with the finish on the mounting base so as to avoid dissimilar metal corrosion. Pure tin should not be used to avoid the potential for whiskering.
5. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

Insulation material: diallyl phthalate.

Dielectric withstanding voltage: see Table I

Table I. Dielectric withstanding voltage.

Part Number	Pressure	Volts ac (rms) (min)
AA59126/18--01	Atmospheric Reduced barometric	2,000 650
AA59126/18--02	Atmospheric Reduced barometric	3,000 1,250

Pull: 8 pounds minimum.
Torque: 3 ounce-inches.
Type of mounting: threaded stud.

Table II. Substitutability data.

Part number in A-A-59126/18 1/	Part number in MIL-T-55155/18B 1/
AA59126/18--01	M55155/18--01
AA59126/18--02	M55155/18--02

1/ The complete part number shall include the symbol for the insulation color (first dash) and symbol for the conductor material and finish (second dash).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodian:
Army - CR
Navy – EC
Air Force – 85

Reviewer:
DLA – GS

CIVIL AGENCY COORDINATING ACTIVITY

GSA-7FXE

Preparing activity:
Army – CR

(Project No. 5940-2021-009)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.