INCH-POUND
A-A-59126/20B
22 March 2021
SUPERSEDING
A-A-59126/20A
31 May 2011

COMMERCIAL ITEM DESCRIPTION SHEET

TERMINALS, STUD (INSULATED)
STYLE SE20

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Style SE20 of MIL-T-55155/20 for all federal agencies.

The requirements for acquiring the product described herein shall consist of this sheet and the latest issue in effect of CID A-A-59126.

REQUIREMENTS:

Dimensions and configuration: see Figure 1.

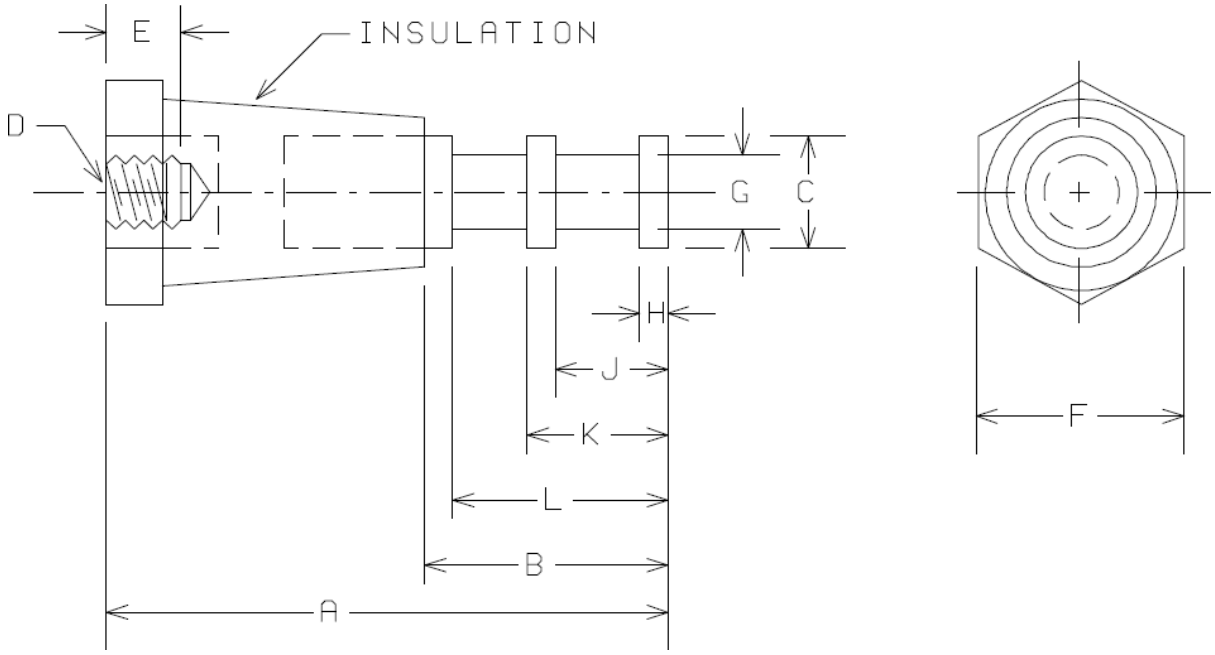


Figure 1. Dimensions and Configuration

Comments, suggestions, or questions on this document should be emailed to usarmy.apg.ccdc-c5isr.mbx.standardization-crx@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T10:13:37Z
Check the source to verify that this is the current version before use.

PART NUMBER	DIMENSIONS										
	A	B	C	D	E (MIN)	F	G	H	J	K	L
AA59126/20--01	.718	.343	.140	4-40 UNC-2B	.156	.250	.062	.031	.125	.156	.304
AA59126/20--02	.937				.218						
AA59126/20--03	.390	.136	.072	2-56 UNC-2B	.078	.156	.047	.020	.068	.088	.116
AA59126/20--04	.937	.343	.140	6-32 UNC-2B	.218	.250	.062	.031	.125	.156	.304

Figure 1. Dimensions and Configuration (continued)

Figure 1 Notes:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±0.015 inch.
3. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

Insulation material: diallyl phthalate

Dielectric withstanding voltage: see Table I.

Table I. Dielectric withstanding voltage.

Part Number	Pressure	Volts ac rms
AA59126/20--01 AA59126/20-03	Atmospheric Reduced barometric	3,000 1,250
AA59126/20--02 AA59126/20-04	Atmospheric Reduced barometric	6,000 2,500

Pull: 8 pounds minimum.
Torque: 3 ounce-inches, minimum.
Type of mounting: tapped hole.

Table II. Substitutability data.

Part number in A-A-59126/20 1/	Part number in MIL-T-55155/20C 1/
AA59126/20--01	M55155/20--01
AA59126/20--02	M55155/20--02
AA59126/20--03	M55155/20--03
AA59126/20--04	M55155/20--04

1/ The complete part number shall include the symbol for the insulation color (first dash) and symbol for the conductor material and finish (second dash).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodian:
Army - CR
Navy – AS
Air Force – 85

Reviewer:
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY

GSA-7FXE

Preparing activity:
Army – CR

(Project No. 5940-2021-011)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.