INCH-POUND
A-A-59126/21B
22 March 2021
SUPERSEDING
A-A-59126/21A
31 May 2011

COMMERCIAL ITEM DESCRIPTION SHEET

TERMINALS, STUD (INSULATED)
STYLE SE21

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Style SE21 of MIL-T-55155/21 for all federal agencies.

The requirements for acquiring the product described herein shall consist of this sheet and the latest issue in effect of CID A-A-59126.

REQUIREMENTS:

Dimensions and configuration: see Figure 1.

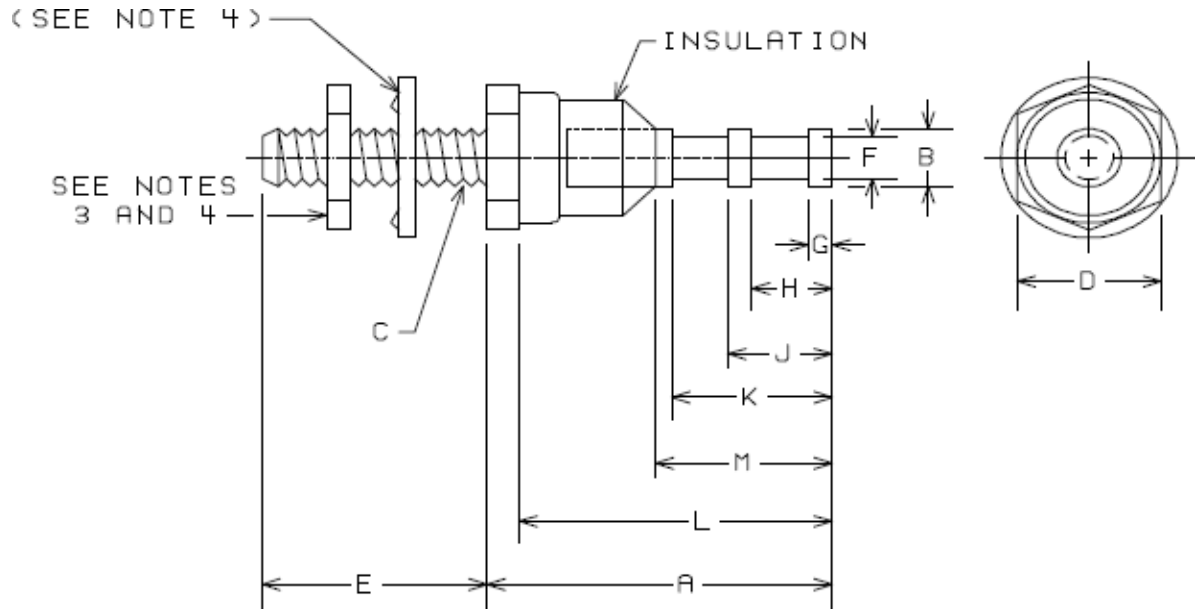


Figure 1. Configuration and Dimensions

Comments, suggestions, or questions on this document should be emailed to usarmy.apg.ccdc-c5isr.mbx.standardization-crx@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

Part Number	DIMENSIONS											
	A	B	C	D	E	F	G	H	J	K	L	M
AA59126/21--01	.531	.093	4-40 UNC-2A	.250	.250	.046	.020	.083	.103	.196	.484	.219
AA59126/21--02					.375							
AA59126/21--03	.545		6-32 UNC-2A	.312	.250						.483	
AA59126/21--04					.375							

Figure 1. Configuration and Dimensions (continued)

Figure 1 Notes:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±0.015 inch.
3. Hex nut, brass, No. 4-40 UNC-2B x 0.09 inch thick x 0.25 inch across flats (AA59126/21--01 and AA59126/21--02); Hex nut, No. 6-32 UNC-2B x 0.11 inch thick x 0.31 inch across flats (AA59126/21--03 and AA59126/21--04)
4. The washer and hex nut shall be plated with the same finish as that on the mounting base.
5. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

Insulation material: ceramic

Dielectric withstanding voltage: see Table I.

Table I. Dielectric withstanding voltage.

Part Number	Pressure	Volts ac rms
AA59126/21--01	Atmospheric	1,500
AA59126/21--02	Reduced barometric	650
AA59126/21--03	Atmospheric	2,000
AA59126/21--04	Reduced barometric	650

Pull: 8 pounds minimum.
Torque: 3 ounce-inches, minimum.
Type of mounting: threaded stud.

Table II. Substitutability data.

Part number in A-A-59126/21 1/	Part number in MIL-T-55155/21B 1/
AA59126/21--01	M55155/21--01
AA59126/21--02	M55155/21--02
AA59126/21--03	M55155/21--03
AA59126/21--04	M55155/21--04

1/ The complete part number shall include the symbol for the insulation color (first dash) and symbol for the conductor material and finish (second dash).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodian:
Army - CR
Navy – EC
Air Force – 85

Reviewer:
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY

GSA-7FXE

Preparing activity:
Army – CR

(Project No. 5940-2021-012)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.