INCH-POUND
A-A-59126 /24B
28 March 2012
SUPERSEDING
A-A-59126 /24A
31 May 2011

COMMERCIAL ITEM DESCRIPTION SHEET

TERMINALS, STUD (NONINSULATED)
STYLE SE24

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Style SE24 of MIL-T-55155/24 for all federal agencies.

The requirements for acquiring the product described herein shall consist of this sheet and CID A-A-59126.

REQUIREMENTS:

Dimensions and configuration: see Figure 1.

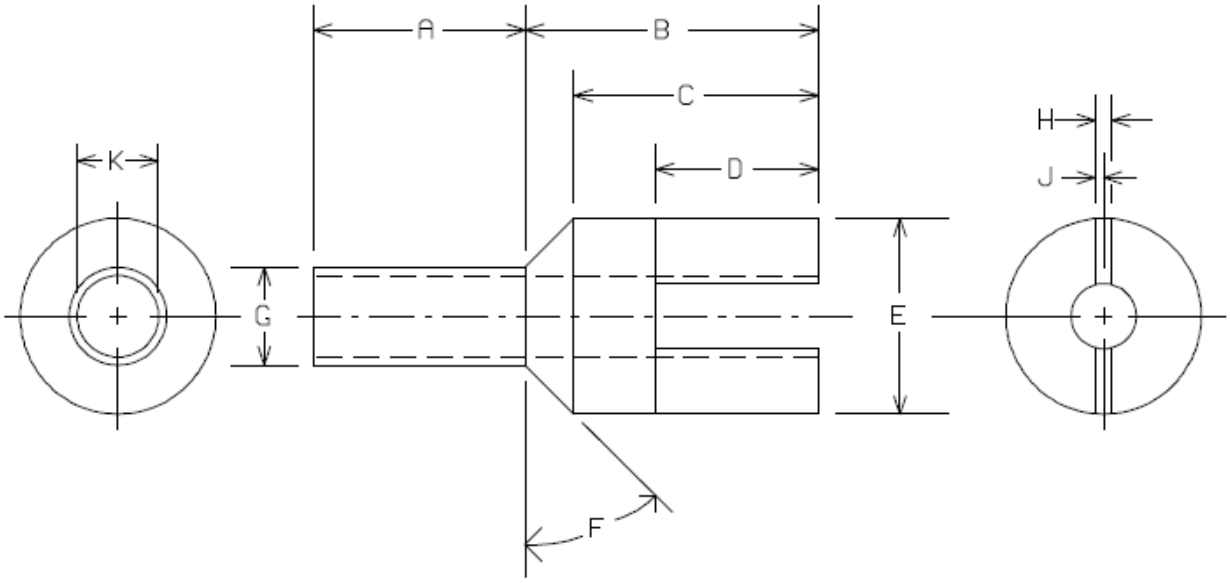

Figure 1. - Configuration and Dimensions

Comments, suggestions, or questions on this document should be emailed to usarmy.APG.cerdec.mbx.standardization-crx@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.daps.dla.mil/

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

PART NUMBER	DIMENSIONS										Mounting Board Thickness (REF)
	A ±.005	B	C	D	E	F	G	H	J	K	
AA59126/24X-01	.062	.188	.156	.093	.125	45°	.060 ±.002	.029	.015	.042 DIA MAX RUNOUT .003 TIR	.031
AA59126/24X-02	.094										.062
AA59126/24X-03	.125										.094
AA59126/24X-04	.156										.125
AA59126/24X-05	.037	.125	---	.094	.094	---	.063 +.000 -.005	.025	---	.043 DIA ±.010	.016
AA59126/24X-06	.053										.031
AA59126/24X-07	.084										.062
AA59126/24X-08	.115										.094
AA59126/24X-09	.147										.125
AA59126/24X-10	.037	.125	---	.031	.062	---	.042 +.000 -.005	.016	.008	.026 DIA ±.010	.016
AA59126/24X-11	.053										.031
AA59126/24X-12	.084										.062
AA59126/24X-13	.115										.094
AA59126/24X-14	.147										.125
AA59126/24X-15	.053	.070	---	.050	.047	---	.032 +.000 -.005	.020	---	.020 ±.010	.031
AA59126/24X-16	.084										.062
AA59126/24X-17	.115										.094

Figure 1 - Configuration and Dimensions (continued)

Figure 1 Notes:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±0.005 inch for item numbers -01 through -04 and ±0.010 inch for items -05 through -17 on decimals and ± 3° on angles.
3. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

Type of mounting: swage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

Table I. Substitutability data.

Part number in A-A-59126/24 1/	Part number in MIL-T-55155/24C 1/
AA59126/24X-01	M55155/24X-01
AA59126/24X-02	M55155/24X-02
AA59126/24X-03	M55155/24X-03
AA59126/24X-04	M55155/24X-04
AA59126/24X-05	M55155/24X-05
AA59126/24X-06	M55155/24X-06
AA59126/24X-07	M55155/24X-07
AA59126/24X-08	M55155/24X-08
AA59126/24X-09	M55155/24X-09
AA59126/24X-10	M55155/24X-10
AA59126/24X-11	M55155/24X-11
AA59126/24X-12	M55155/24X-12
AA59126/24X-13	M55155/24X-13
AA59126/24X-14	M55155/24X-14
AA59126/24X-15	M55155/24X-15
AA59126/24X-16	M55155/24X-16
AA59126/24X-17	M55155/24X-17

1/ The complete part number shall include the symbol for the conductor material and finish.

MILITARY INTERESTS:

Custodian:
Army - CR
Navy – AS
Air Force – 85

Reviewer:
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY

GSA-7FXE

Preparing activity:
Army – CR

(Project No. 5940-2012-013)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.