INCH-POUND
A-A-59126/3B
11 March 2021
SUPERSEDING
A-A-59126/3A
31 May 2011

COMMERCIAL ITEM DESCRIPTION SHEET


TERMINALS, FEEDTHRU (INSULATED)
STYLE FT03

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Style FT03 of MIL-T-55155/3 for all federal agencies.

The requirements for acquiring the product described herein shall consist of this sheet and the latest issue in effect of CID A-A-59126.

REQUIREMENTS:

Dimensions and configuration: see Figure 1.

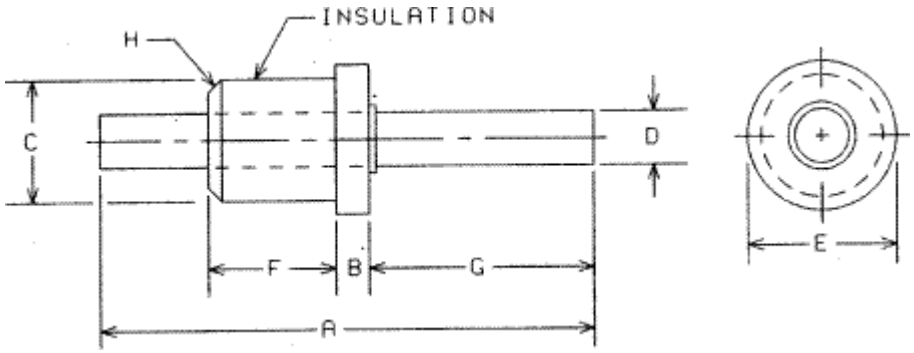

.

Figure 1. Configuration and Dimensions

Comments, suggestions, or questions on this document should be emailed to usarmy.apg.ccdc-c5isr.mbx.standardization-crx@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

Part Number	Dimensions							
	A	B	C +.002 -.000	D	E	F	G	H (REF)
AA59126/03--01	.375	.040	.148	.040	.172	.100	.125	.015 X 45°
AA59126/03--02	.515						.210	
AA59126/03--03	.675	.125	.165		.187	.150	.200	.031 X 45°
AA59126/03--04	.515	.040	.093		.125	.100	.210	.015 X 45°
AA59126/03--05	.343						.125	

Figure 1. Configuration and Dimensions (continued)

Figure 1 Notes:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±0.015 inch and ±3° on angles.
3. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.
4. Terminals shall have no less than 0.040 inch of the insulated portion protruding beyond the mounting panel or board.

Insulation material: Polytetrafluoroethylene

For test mounting hole dimensions, see Figure 2.

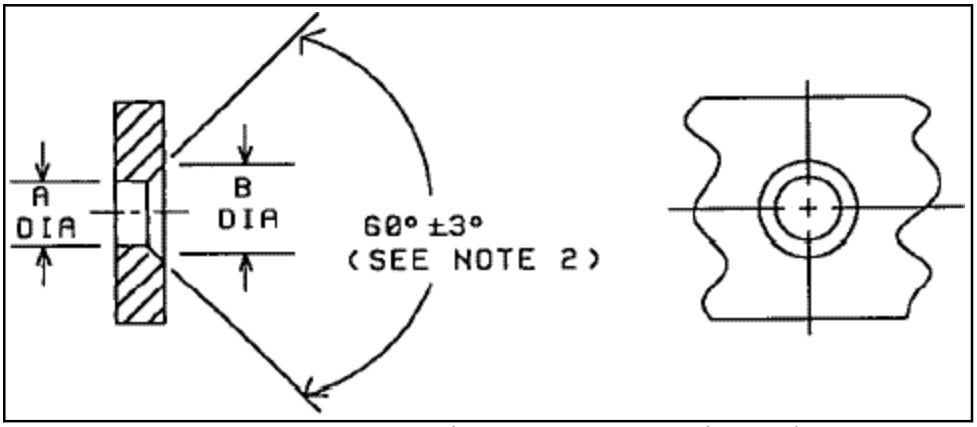


Figure 2. Test Mounting Hole.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

PART NUMBER	DIMENSIONS			
	A		B	
	MAX	MIN	MAX	MIN
AA59126/03--01	0.138	0.134	0.165	0.160
AA59126/03--02				
AA59126/03--03	0.154	0.150	0.180	0.175
AA59126/03--04	0.088	0.081	0.115	0.110
AA59126/03--05				

Figure 2. Test Mounting Hole (continued)

Figure 2 Notes:

1. Dimensions are in inches.
2. For panels that are less than .040 inch thick, the countersink in the hole shall have an 82° included angle.

Table I. Dielectric Withstanding Voltage

Part Number	Pressure	Volts ac rms (min)
AA59126/03-01 and AA59126/03-02	Atmospheric Reduced barometric	2,000 650
AA59126/03-03	Atmospheric Reduced barometric	2,500 650
AA59126/03-04 and AA59126/03-05	Atmospheric Reduced barometric	1,500 450

Pull: 8 pounds minimum.
Torque: 3 ounce-inches, minimum.
Type of mounting: Compression.

Table II. Substitutability data

Part number in A-A-59126/3 1/	Part number in MIL-T-55155/3D 1/
AA59126/03--01	M55155/03--01
AA59126/03--02	M55155/03--02
AA59126/03--03	M55155/03--03
AA59126/03--04	M55155/03--04
AA59126/03--05	M55155/03--05

1/ The complete part number shall include the symbol for the insulation color (first dash) and symbol for the conductor material and finish (second dash).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodian:
Army - CR
Navy – EC
Air Force – 85

Reviewer:
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY

GSA-7FXE

Preparing activity:
Army – CR

(Project No. 5940-2021-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.