MILITARY SPECIFICATION

# CASE, DECORATION, MEDALLION, PRESENTATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers presentation cases to be used with 3 inch medallions.

1.2 Classification. Cases covered by this specification shall be of the following classes, as specified (see 6.2).

Class 1 - For Medallion with Rosette and/or Lapel Button
Class 2 - For Medallion without Rosette and/or Lapel Button

## 2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-S-698 - Steel, Sheet and Strip, Low Carbon
PPP-B-636 - Boxes, Shipping, Fiberboard
PPP-B-676 - Boxes, Set-up

STANDARD

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: Director, The Institute of Heraldry, US Army, Cameron Station, Alexandria, VA 22304-5050, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8455



DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWING

THE INSTITUTE OF HERALDRY

4-4-94 - Cases, Decoration, Medallion, Presentation, Assembly and Details.

(Copies of specifications, standards and drawings required by the contractor in connection with a specific procurement function should be obtained from the procuring activity or as directed by the contracting officer.)
(Figure 1 is a miniature reproduction of Drawing 4-4-94 and is attached for information purposes.)

2.3 Order of precedence. In the event of a conflict between the text of the specification and reference cited herein, the text of this specification shall take precedence.

## 3. REQUIREMENTS

3.1 Standard samples.

3.1.1 Cases. Unless otherwise specified (see 6.2), the contracting officer will furnish a standard sample of the case for matching the color and finish of the coated cover only. If no case is available a sample of the required material may be substituted as a standard (see 1.2 and 6.3).

3.1.2 Plushes and satin cloth. Unless otherwise specified (see 6.2) the contracting officer will furnish a sample of each plush and a sample of the satin cloth, which shall be used for matching color, texture and quality.

3.2. First article. When specified (see 6.2), before production is commenced a sample of the finished case shall be submitted or made available to the contracting officer or his authorized representative for approval. Approval of the first article authorizes the commencement of production but does not relieve the manufacturer of responsibility for compliance with all applicable provisions of this specification. The first article shall be manufactured by the contractor in the same manner and in the same facilities to be used for the production items.

3.3 Materials. Materials shall conform to the referenced specifications and the requirements specified herein.

3.3.1 Paper. Paper for lining the back of the pads and the interior top and bottom of the case shall be 120 pound white chipboard finish No. 4, 1/32 inch in thickness.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

3.3.2 Hinge. The hinge for the case shall be a piano type brass plated steel hinge 2-7/8 inches plus or minus 1/8 inch in length. The overall width of the hinge shall be 5/8 plus or minus 1/64 inch. The thickness of the leaf shall be a minimum of 1/64 inch. The hinge shall be fitted with two spring steel clips insuring closure of the case unless an upward force is exerted on the lid.

3.3.3 Steel. Steel for the case shell shall conform to CRCQ or HRCQ of QQ-S-698.

3.3.4 Cover. At the option of the manufacturer the cover of the case may be fabricated from either a pyroxylin coated cloth or morocco grain vinyl.

3.3.4.1 Pyroxylin coated cloth. The base cloth for the pyroxylin coated cloth shall be dyed dark blue to approximate the shade of the pyroxylin coating. The sheeting shall weigh 2.5 ounces per square yard and the sheeting construction shall have a minimum of 56 ends and 56 picks. The coated side of the cloth will match the standard sample in color and finish.

3.3.5 Lacquer. The lacquer shall be a pale clear, synthetic lacquer. The use of pigmented lacquer shall not be permitted.

3.4 Construction. Cases shall be constructed in accordance with Drawing 4-4-94. All cited dimensions are for finished components and/or cases. The shell of the case shall be formed from steel specified in 3.3.3 having a thickness of 0.018 inch plus or minus .002 inch. The case shall consist of two sections, a lid section and a lower section connected by a hinge specified in 3.3.2. The exterior surfaces and the interior walls of both sections shall be covered with pyroxylin coated cotton sheeting specified in 3.3.4. At the option of the manufacturer, a .010 inch thick navy blue morocco grain vinyl having a minus 10 degrees F. cold crack resistance and good grain retention characteristics at processing temperatures may be used in lieu of the pyroxylin coated cloth. Except for the portion of the edge covered by the hinge, the edges of both sections of the case shall have a steel brass plated. The ends of the striking edge shall be butted flush with the ends of the hinge. The striking edge shall be formed from brass 0.008 plus or minus .002 inch thick, shall have a mirror-like polished finish and shall be coated with lacquer specified in 3.3.5, prior to assembly.

3.4.1 Lid section. The interior of the lid section shall be lined with paper specified in 3.3.1. In addition to the paper, the lid interior shall have a low density polyurethane pad 1/4 inch thick and covered by white satin cloth glued securely to the interior lid. The pad shall completely fill the length and width of the interior of the lid.

3.4.2 Bottom section. At the option of the manufacturer, the dust shield and bottom may be a molded unit, or may consist of boxboard covered with white



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

plush and securely glued to the walls of the case, as shown on Drawing 4-4-94. When the dust shield and bottom are made as a molded unit, the unit shall be molded from .015 inch thick impact quality styrene with a cotton flock face. The flocking shall be white to match the plush dust shield. When the dust shield is made as a separate unit, the boxboard shall be 9/16 inch, plus or minus 1/32 inch high, 13 5/8 inches, plus or minus 1/8 inch long and 1/32 inch plus or minus 1/64 inch thick. When the dust shield is a separate unit the bottom shall be covered with paperboard, as specified in 3.3.1, and glued securely to the bottom of the case. At the hinged end of the case the free ends of the dust shield and the hinge shall be covered with white satin cloth. The satin cloth shall have the sides neatly pinked or fused to prevent raveling.

3.4.3 Pads. The class I and class II pads shall be fabricated from 14 ply bristol board and shall conform to the details and dimensions shown on Drawing 4-4-94 and the Military Specification Sheet covering the applicable medallion (see 6.2). The well shall be constructed to conform to the outside configuration of the medallion to be inserted. The face, edges, and a minimum of 1/2 inch on all sides of the back of the pad, shall be covered with gray plush specified in 3.1.2. Other colors of plush may be required, if directed by the contracting officer. After the lift tabs have been positioned and securely anchored, the reverse side of the pad shall be covered with paper specified in 3.3.1. The lift tabs shall be made from white satin ribbon 3/8 inch wide, doubled over with a selvage along each edge.

3.5 Marking. In addition to any special marking required (see 6.2), each case shall be marked with the manufacturer's name, trade mark or identification mark stamped or printed legibly in the center of the paper covering the interior bottom of the case so as to be visible when the pad of the container is removed. If the molded dust shield, the marking may be molded as an integral part of the molded dust shield. The letters shall not exceed 3/8 inch in height.

3.6 Workmanship. Cases shall be clean, well made, and shall meet the acceptable quality levels established by this specification.

## 4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required, the first article shall be inspected for all provisions of this specification applicable to end item examination and test.

4.4 Quality conformance inspection. Sampling for inspection and acceptance shall be in accordance with MIL-STD-105, except where otherwise indicated.

4.3.1 Certification of compliance. Components listed below may be accepted on the basis of a contractor's certification of compliance for the requirements specified in applicable paragraphs of this specification.

| Component | Characteristic | Rqm't para. |
|---|---|---|
| Paper | Material identification weight, finish and ply | 3.3.1 |
| Hinge | Material identification and plating | 3.3.2 |
| Steel | Material identification | 3.3.3 |
| Cloth, pyroxylin coating | Material identification | 3.3.4.1 |
| Lacquer | Material identification | 3.3.5 |
| Striking edge | Material identification | 3.4 |
| Vinyl material | Material identification thickness, minus 10 degrees F. cold crack resistance, grain retention | 3.4 |
| Polyurethane | Material identification and thickness | 3.4.1 |
| White satin cloth | Material identification and color | 3.4.1 |
| Molded insert | Material identification, thickness and facing | 3.4.2 |
| Pads | Material identification and ply | 3.4.3 |
| Lift tab | Material identification | 3.4.3 |

4.3.2 In-process examination. Examination shall be made during the manufacturing process for the requirements listed below to establish that no deviation is made from indicated requirements. Whenever a nonconformance is noted, correction shall be made to affected items and to the process.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

| Requirements of operation | Rqm't para. |
|---|---|
| Interior of lid and bottom of case lined with paperboard | 3.4.1 |
| Polyurethane pad is glued to the interior of lid shell | 3.4.1 |
| Lift tab positioned and securely anchored to reverse side of pad | 3.4.3 |
| Polyurethane pad is glued to the exterior of lid shell | 3.4 |
| Pad face, edges and a minimum of 1/2 inch on all sides of the back of the pad covered with gray plush | 3.4.3 |

4.3.3 Inspection of the end item.

4.3.3.1 Visual examination of case. The defects found during examination shall be classified in accordance with 4.3.3.1.1 and 4.3.3.1.2. The unit of product for these examinations shall be one completely fabricated case. The inspection level and the acceptable quality level (AQL's) shall be as specified in 4.3.3.1.3.

4.3.3.1.1 Examination for defects in design, material, construction, and workmanship. Defects designated by an asterisk (*) shall be classified as major when affecting appearance or serviceability and minor when affecting appearance or serviceability but not seriously. The containers shall be examined from a distance of 16 to 22 inches under normal daylight or its equivalent.

| Examine | Defect | Classification Major | (*) | Minor |
|---|---|---|---|---|
| Exterior surface | Color and finish does not match the standard or approved sample | x | - | - |
| | Not covered as specified | x | - | - |
| | Covering not taut, i.e., any wrinkle(s), bubble(s) or crease(s) | | | |
| | Visible imperfection in cover, i.e., spotted or stained, cut, torn, abraded or otherwise damaged | x | - | - |
| Interior surfaces | Plush or satin does not match the standard or approved sample for color, finish or texture | x | - | - |
| | Visible imperfection in plush or satin, i.e., stained, discolored, cut, torn, frayed, or otherwise damaged | - | * | - |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

| | | | | |
|---|---|---|---|---|
| Workmanship | Hinge not as specified. . . . . | x | - | - |
| | Lid (when closed) is not aligned with the bottom of the case . . . . . | x | - | - |
| | Lid does not close completely over components . | x | - | - |
| | Lid does not spring closed when released from a 30 degree angle . . . . . | x | - | - |
| | Case is punctured, broken, indented, malformed, or otherwise damaged. . . . . | x | - | - |
| | Metal edge contains sharp edge, burr or is dented, bent or otherwise damaged . . . . . | - | * | - |
| | Ends of striking edge not butted flush with ends of the hinge. . . . . | - | - | x |
| | Hinge not covered on the inside . . . . . | x | - | - |
| | Lift tab missing. . . . . | x | - | - |
| | Lift tab not securely anchored. . . . . | - | * | - |
| | Does not contain metal edge on lid or lower section of case. . . . . | x | - | - |
| | Metal edge is not mirror-like polished or is not lacquered. . . . . | - | - | x |
| | Case not clean. . . . . | - | * | - |
| | Incorrect pad or no pad . . . . . | x | - | - |
| | Molded insert not securely glued to shell . . . | - | * | - |
| | Pad not covered as specified. . . . . | - | * | - |
| | Satin cloth sides not pinked or fused . . . . . | - | - | x |
| Marking | Marking not placed as required. . . . . | - | * | - |
| | Missing, illegible, or incorrect. . . . . | - | - | x |

4.3.3.1.2 Examination of cases for defects in dimension. Any dimension that is not within the specified tolerance shall be classified as a defect.

4.3.3.1.3 Inspection levels and acceptable quality levels (AQL's). The inspection levels and the acceptable quality levels (AQL's) expressed in defects per hundred units shall be as follows:

| | Inspection level | AQL Major | AQL Total |
|---|---|---|---|
| For defects applicable to 4.3.3.1.1 | II | 2.5 | 10.0 |
| For defects applicable to 4.3.3.1.2 | S-2 | (one class) | 2.5 |

4.3.3.1.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing, and marking comply with the requirements of section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2, and the acceptable quality level (AQL) shall be 4.0.

| Examine | Defects |
|---|---|
| Markings (exterior and interior) | Omitted, incorrect, illegible, or improper size, location, sequence, or method of application. |
| Materials | Any component missing, damaged, or affecting serviceability. |
| Workmanship | Inadequate application of components such as incomplete closure of container flaps, or inadequate stapling. Bulged or distorted containers. |
| Weight | Weight exceeds requirements. |

## 5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. A one inch wide paperboard sleeve capable of fitting snugly over the closed case in the width direction (hinge to front) shall be placed within each case. Each case so prepared shall be placed in a snug-fitting ser-up paperboard box conforming to type I, variety 1, class A, style 4 of PPP-B-676.

5.1.2 Level C. Cases shall be preserved and packaged to afford protection against corrosion, deterioration, and physical damage during shipment from the supply source to the first receiving activity. The supplier's commercial practice will be acceptable when it fulfills the above requirements.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Cases of one class only packaged as specified in 5.1 shall be packed in a snug-fitting fiberboard shipping container conforming to Class Weather Resistant V3c or V3s of PPP-B-636. Closure shall be in accordance with the appendix of the container specification. The weight of the contents of each shipping container shall not exceed the weight and size limitations of the container specification.

5.2.2 Level B. Cases of one class only packaged as specified in 5.1 shall be packed in a snug-fitting fiberboard shipping container conforming to class domestic, grade 275 of PPP-B-636. Closure shall be in accordance with the appendix of the container specification. The weight of the contents of each shipping container shall not exceed the weight and size limitations of the container specification.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. Cases, packaged as specified in 5.1, shall be packed in a manner to assure carrier acceptance and safe delivery at destination at the lowest transportation rate for supplies. Shipping containers shall be in accordance with the rules and regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or purchase order (see 6.2), unit packages and shipping containers shall be marked in accordance with MIL-STD-129.

## 6. NOTES

6.1 Intended use. Cases covered by this specification are intended to be used as presentation cases for medallions.

6.2 Ordering date. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Class required (see 1.2).
c. Number and date of Military Specification Sheet covering the applicable medallion, (see 3.4.3).
d. When a first article is required (see 3.2).
e. When special marking is required (see 3.5 and 5.3).
f. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Color. Unless otherwise specified the cases shall be colored dark blue. Tanotex quality 104, Morocco, Two/Tone, Royal Blue #5960 is known to meet the color requirements. When a different color is required a standard of the color should be furnished with the invitation for bid or request for proposal.

6.4 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

6.5 First article. First article samples shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample or initial production item. The contracting officer should specify the appropriate type of first article and the number of units to be furnished.

6.6 Changes from previous issue. Asterisks (*) or vertical lines are not used in this revision to identify major changes with respect to the previous issue due to the extensiveness of changes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Review activities:
Air Force - 82,99
Navy - MC
Other - CT

User activities:
Air Force - 45
Navy - CG

Preparing activity:
Army - IH

(Project No. 8455 - 0022)


FSC 8455



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.



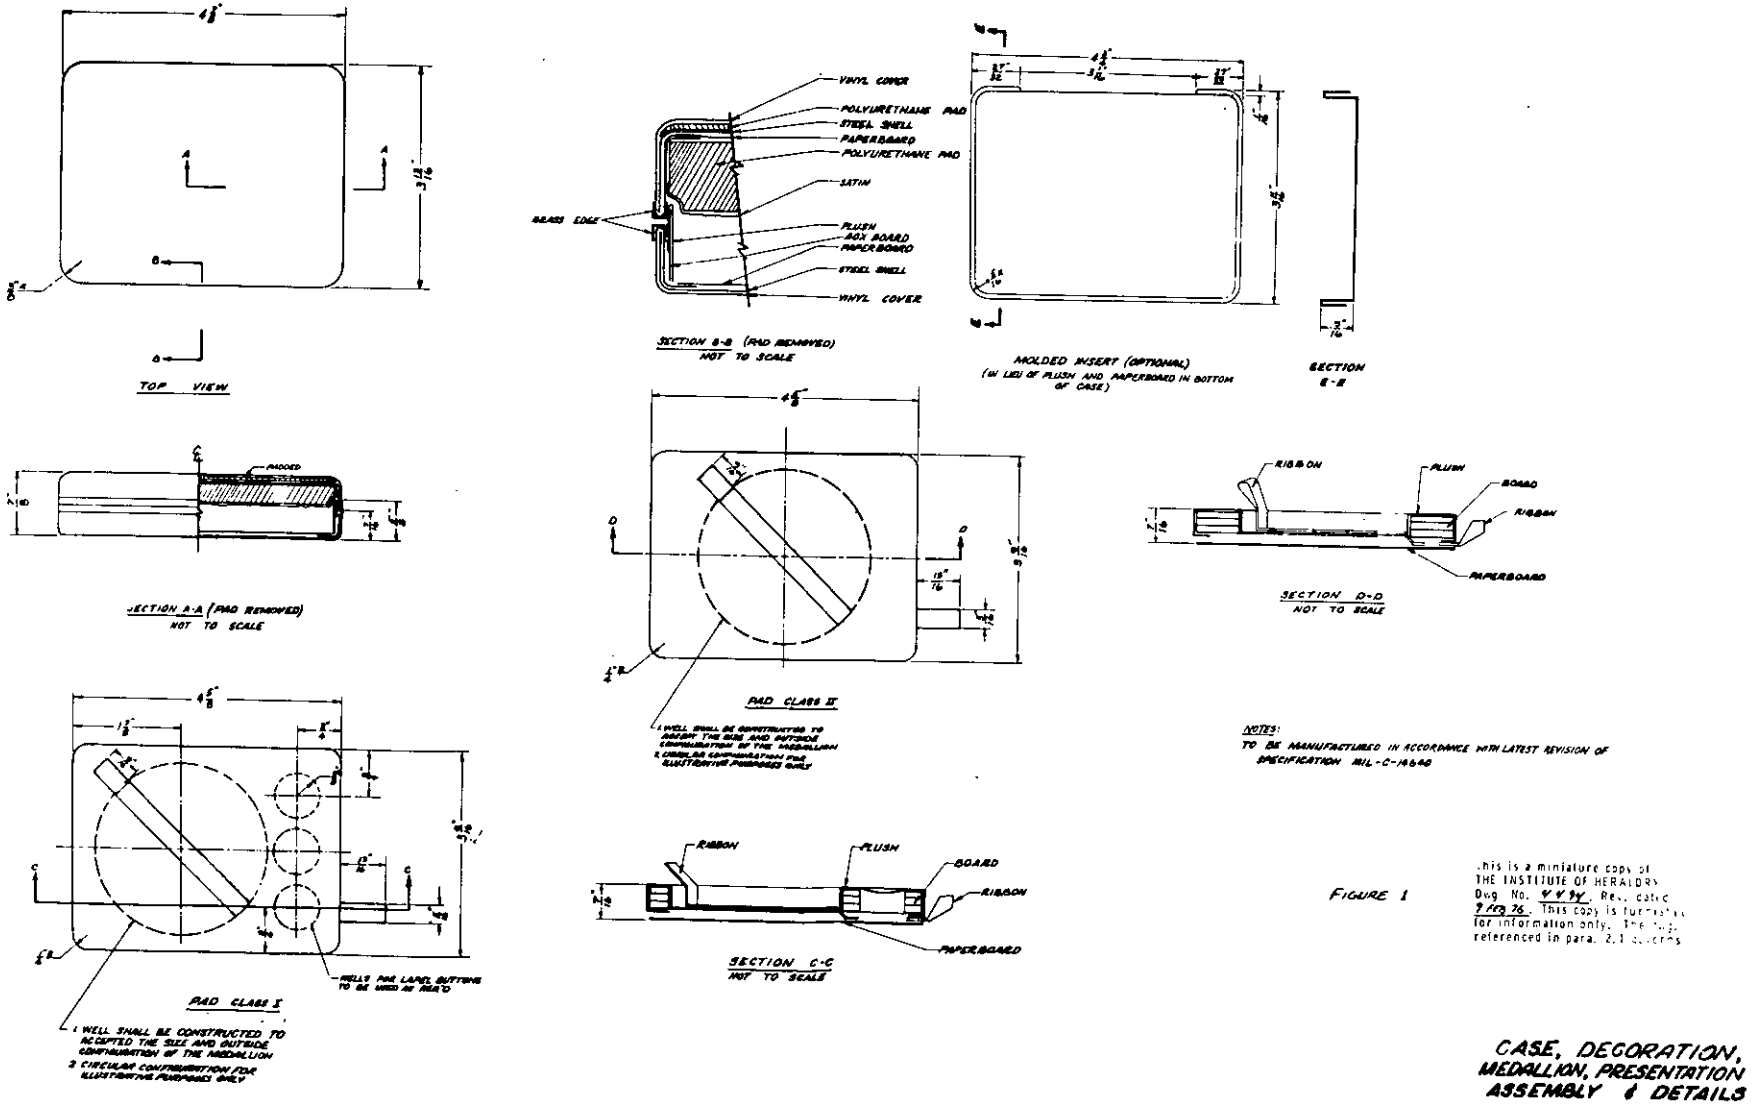


NOTES:
TO BE MANUFACTURED IN ACCORDANCE WITH LATEST REVISION OF SPECIFICATION MIL-C-14640

FIGURE 1

This is a miniature copy of THE INSTITUTE OF HERALDRY Dwg No. 4-4-94, Rev. date 9 FEB 76. This copy is furnished for information only. The dims referenced in para. 2.1 govern.

CASE, DECORATION, MEDALLION, PRESENTATION ASSEMBLY & DETAILS

Figure 1

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-C-14640B | Case, Decoration, Medallion, Presentation |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| | ☐ USER |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)*: _____ |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.