MILITARY SPECIFICATION

DECORATIONS
PRESIDENTIAL MEDAL OF FREEDOM WITH DISTINCTION

AND
PRESIDENTIAL MEDAL OF FREEDOM

This specification is approved for use by all Departments and Agencies of the Department of Defense

1. SCOPE

1.1 Scope.- This specification covers the requirements of the Presidential Medal of Freedom with Distinction and the Presidential Medal of Freedom.

1.2 Classification.- The decorations covered by this specification shall be of the following types, styles, or components (see 6.2).

Type I - Presidential Medal of Freedom with Distinction
Type II - Presidential Medal of Freedom
    Style 1 - Male
    Style 2 - Female

1.2.1 Components.- Components covered by this specification shall be classified in the following components, classes, and styles (see 6.2).

Component A - Shoulder sash with rosette and sash badge.
Component B - Breast badge.
Component C - Lapel ribbon with lapel device.
    Class 1 - Presidential Medal of Freedom with Distinction.
    Class 2 - Presidential Medal of Freedom.
Component D - Lapel bow with lapel device.
    Class 1 - Presidential Medal of Freedom with Distinction.
    Class 2 - Presidential Medal of Freedom.
Component E - Miniature decoration with ribbon device.
    Class 1 - Presidential Medal of Freedom with Distinction.
    Class 2 - Presidential Medal of Freedom.
Component F - Service ribbon with ribbon device.
    Class 1 - Presidential Medal of Freedom with Distinction.
    Class 2 - Presidential Medal of Freedom.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

Component G - Pendant with neck ribbon.
Component H - Pendant with bow.
Component I - Type I container.
Component J - Type II container.
Style 1 - Male
Style 2 - Female

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS
FEDERAL
V-T-276 - Thread, Cotton
UU-P-553 - Paper, Wrapping, Tissue
CCC-C-458 - Cloth, Cotton, Flannel, Canton
MMM-A-100 - Adhesive, Animal-Glue
PPP-B-636 - Box, Shipping, Fiberboard
PPP-B-676 - Boxes, Set-up
MILITARY
MIL-S-3951 - Service Ribbons and Service Ribbon Bars
MIL-W-6110 - Wood, Determination of Moisture Content of
STANDARDS
FEDERAL
FED-STD-151 - Metal, Test Methods
FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitch Seam and Stitching
MILITARY
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
DRAWINGS
THE INSTITUTE OF HERALDRY
B-13-5 - Attaching Devices, Heraldic Pin and Catch Type
B-12-13 - Attaching Device, Heraldic Prong and Clutch Type
4-4-82 - Container; Decorations; Presidential Medal of Freedom with Distinction - Type I
4-4-83 - Container; Decorations; Presidential Medal of Freedom - Type II
4-4-86 - Pendant Ribbon Bars, Regular and Miniature Assembly and Details
5-1-303 - Presidential Medal of Freedom, Ribbon Components

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

(Miniature copy of Drawings 4-4-86, B-12-13, B-13-5, 4-4-82, and 4-4-84 identified as figures 1, 2, 2A, 9 and 10 respectively are attached for information purposes only.)

(Copies of Specifications, Standards, and Drawings required by the contractor in connection with specific procurement functions should be obtained from the procurement activity or as directed by the Contracting Officer.)

2.2 Other publications.- The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

THE COLOR ASSOCIATION OF THE UNITED STATES OF AMERICA, INC.
DOD Standard Shades for Heraldic Yarns for Embroidery and Ribbons

(Application for copies of the above standards should be addressed to The Color Association of the United States, Inc.; 200 Madison Avenue; New York, NY 10016.)

THE INSTITUTE OF HERALDRY
Standard Color Chips Set

(Referenced color chips may be obtained from the procuring activity for Government procurements.)

3. REQUIREMENTS

3.1 Standard samples.- Unless otherwise specified (see 6.2), the Contracting Officer will furnish a standard sample of each component required which unless otherwise specified shall be used for matching color and finish only. Other characteristics may vary in accordance with the requirements of this specification.

3.1.1 Ribbon.- The Contracting Officer shall furnish a sample of one ribbon which shall be used for matching the shade of blue only.

3.1.2 Plush and satin.- The Contracting Officer shall furnish a sample of silver gray plush and a sample of the satin cloth to be used for matching color, texture, and quality. The white plush shall have the same texture and quality as the silver gray plush and the color shall match the color of the satin cloth.

3.2 First Article.- Unless otherwise specified (see 6.2), before production is commenced a sample of each component shall be submitted or made available to the Contracting Officer or his authorized representative for inspection and tests as specified in 4.2. The approval of the first article authorizes the

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

commencement of production but does not relieve the contractor of responsibility for compliance with all applicable provisions of this specification. The first article shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.3 Materials.- Materials shall conform to the referenced specifications and to the requirements specified herein.

3.3.1 Copper base alloys.- Copper base alloys shall be rolled polished, free from pits, scale (including red oxide), dents, nicks, cracks, scratches, segregations, and foreign inclusions that will not be removed in later processing. When tested as specified in 4.4.1, the chemical composition of the applicable copper base alloy shall be as specified in Table I.

TABLE I - Chemical composition of copper base alloys.

Copper base alloy	Copper	Nickel 1/	Lead (max)	Iron (max)	Manganese (max)	Zinc	Others (max)
Yellow brass	64.0 to 68.5		.15	.05		Remainder	.15
Red brass	84.0 to 86.0		.05	.05		Remainder	.15
Gilding metal	94.0 to 96.0		.03	.05		Remainder	.13
Nickel Silver	63.0 to 2/ 66.5	16.5 to 19.5	.10	.25	.50	Remainder	

1/ Cobalt counting as nickel.

2/ Copper content for nickel silver pin only shall be 53.5 - 56.5%.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

3.3.2 Gold for plating.- Gold for plating shall be 24 karat.

3.3.3 Sterling silver.- Sterling silver shall contain not less than 92.5 percent pure silver.

3.3.4 Solder.- Solder shall be hard solder having a melting point of not less than 1075 degrees F.

3.3.5 Enamel.- Enamel shall be a hard glass type vitreous enamel fused with metallic oxides to produce the required color.

3.3.6 Lacquer.- Lacquer shall be a clear, pale, synthetic lacquer. The use of pigmented lacquers shall not be permitted.

3.3.7 Snap fastener.- Snap fasteners for the neck ribbon shall be a commercial sew-on type size 2/0. The snap fastener shall be fabricated from brass and shall be nickel plated.

3.3.8 Cement.- Cement for reinforcing pinked and swallow-tailed ends shall be of a nitrocellulose type which will dry clear. The solvent constituents and the viscosity must be such that when applied to one side of a ribbon and completely air dried there shall be no evidence of discoloration or stain on the opposite side of the ribbon. The dried adhesive shall be waterproof and flexible. When tested as specified in 4.4.8, there shall be no evidence of cracking or peeling.

3.3.9 Thread.- Thread shall conform to type IC2 of Specification V-T-276. The color shall be Freedom Blue and shall match the standard sample furnished.

3.3.10 Wood.- Wood for the containers shall be selected quarter cut seasoned walnut. When tested as specified in 4.4.10, the slope of the grain shall not exceed one inch in twelve inches. When tested as specified in 4.4.8, the wood, at the time of milling, shall have a moisture content of five to nine percent. The wood shall be free from knots, blemishes, cracks, shakes, and torn or raised grain or any other defect which may affect appearance or serviceability.

3.3.11 Hinge.- The hinge for the container shall be a nickel or chrome plated recessed piano type hinge 5 inches plus or minus 1/4 inch in length and shall be fabricated from brass. The total width of the open hinge shall not exceed 5/8 inch. The leafs shall have a minimum thickness of 1/16 inch.

3.3.12 Catch.- The catch or locking mechanism shall be a nickel or chrome plated recessed push button type catch, 1-1/2 inches plus or minus 1/8 inch in overall length and shall be fabricated from brass. The striking plate shall be not more than 5/16 inch in width.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

3.3.13 Paper.- Paper for lining the back of the pads and the interior bottom of the containers shall be 2 ply white bristol board, 1/32 inch in thickness.

3.3.14 Service ribbon.- Service ribbons shall conform to type II, style 1 of MIL-S-3951 except that the hinge joint and catch shall be builtup on a platform or disks so that there is a minimum distance of 1/8 inch between the pin and the bar.

3.3.15 Tape; elastic.- The elastic tape for the type I container shall be any type commercial grade elastic cloth tape 1/8 inch in width and dyed Freedom Blue (see standard sample of ribbon for color match). Cut length of elastic shall be 10 percent less than the specified length.

3.3.16 Seal.- The seal shall be an exact replica of the design on the Government furnished hub. The seal shall be fabricated of sterling silver specified in 3.3.3, and shall be 1/16 inch plus or minus .005 inch in overall thickness. The seal shall have an oxidized, relieved, satin finish matching the finish of the seal on the standard sample.

3.3.17 Adhesive.- Adhesive for wood joints shall conform to type I, grade V1, V2, J1 or J2 of MMM-A-100.

3.3.18 Flannel.- Flannel cloth for the container bag shall conform to Type III of CCC-C-458.

3.4 Design.- The embossed design of the decoration components and the seal shall be exact replicas of the designs of the Government furnished hubs (see 3.10) from which the contractor's working dies shall be extracted. The contractor's dies shall be tooled and polished to remove any dents, nicks, scratches, or other imperfections. Unornamented sections shall be smooth and polished.

3.5 Construction.- Components shall be constructed as shown on the applicable figures or drawings and as specified herein. Where cementing is required on the reverse of the ribbon, care should be taken to insure permeation of the filling thread without penetration to the face side of the ribbon.

3.5.1 Stamping, trimming, and piercing.- Metal components shall be struck in a manner that shall insure a well defined die struck edge. The components shall be trimmed and when applicable pierced to the die struck outline of the area specified. All edges shall be clean, smooth, and free from burrs, drag, step, and rough edges. The trimming and piercing operations shall not damage or distort the design or alter the shape of the component.

3.5.2 Soldering or electronic fusion.- At the option of the manufacturer joints shall be soldered or electronically fused. All soldering shall be accomplished using solder specified in 3.3.4. Soldered parts shall be completely joined without excess solder and all excess flux shall be removed. Joints shall be clean, strong, smooth, and free from burned or reduced areas. When tested as specified in 4.4.4, the soldered joint shall not separate. When tested as specified in 4.4.9, the prongs shall not separate at the fused joint.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

3.5.3 Attaching device.- Attaching devices shall be as specified on the applicable figure.

3.5.3.1 Prong and clutch type.- Prong and clutch type attaching devices shall be as shown on figure 2 and as specified herein. Prongs shall be made from nickel silver specified in 3.3.1 and shall be hard soldered or fused to the back of the applicable component. The prongs shall be 5/16, plus 1/64, minus 0, inch in length and shall be located as specified on the applicable figure. Clutches shall be made from any type brass and when tested as specified in 4.4.6, the clutch shall not be removable except when the wings are depressed.

3.5.3.2 Pin and catch type.- The pin and catch type attaching device shall be as shown on figure 2A and as specified herein. The pin shall be made from nickel silver specified in 3.3.1, and shall be located as shown. The pointed end of the pin stem shall extend not less than 1/32 inch beyond the rotor of the catch and not more than 1/32 inch beyond the catch. When tested as specified in 4.4.3, the joint and safety catch shall show no signs of looseness.

3.5.4 Ribbon.-

3.5.4.1 Yarn.- The yarn shall be continuous filament bright or semi-luster, regenerated cellulose rayon of the viscose or cuprammonium type, with not less than 20 filaments of the single yarns. The denier (size) shall conform to table II.

3.5.4.2 Color.- The individual colors of the finished ribbon shall conform to cable numbers specified herein (see 6.3). The use of sulfur dyes or dyes containing elementary sulfur compounds capable of oxidation to sulfuric acid is prohibited. Test for sulfur dyes shall be conducted in accordance with TM 2020 of FED-STD-191.

3.5.4.3 Matching.- The color shall match the approved standard shade under natural (North Sky) daylight, or artificial daylight having a color temperature of 7500 degrees Kelvin and shall be a good approximation to the standard shade under incandescent lamplight at 2800 degrees Kelvin.

3.5.4.4 Colorfastness.- The rayon yarn shall show fastness to crocking, wet-dry cleaning, water, and light properties equal to or better than the standard sample when tested as specified in 4.3.1.1. When no standard sample is available, the rayon yarn shall show not less than good fastness to crocking, wet-dry cleaning, water, and light when tested as specified in 4.3.1.1.

3.5.4.5 Weave.- The ribbon shall be woven with a grosgrain weave in the ground and a 3 and 1 corkscrew weave in the selvage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

3.5.4.6 Physical requirements.- The finished ribbon shall conform to the physical requirements shown in table II, when tested as specified in 4.3.1.1.

TABLE II - Physical requirements

Width inches	Denier Warp (ply)	(size) Filling (ply)	Total Warp (min)	Picks per inch (+2)	Weight linear yd (min)	Tensile Strength full width (min)
1-3/8 + 1/16 - 0	50/2	50/2-3	420	80 (1 thread double shot)	.28 oz.	80 lbs.
3-3/8 + 1/16 -0	50/2	50/2-3	1020	80 (1 thread double shot)	.68 oz.	80 lbs.
11/16 + 1/16 -0	50/2	50/2-3	210	80 (1 thread double shot)	.14 oz.	50 lbs.
3/16 + 1/16 -0	50/2	50/2-3	80	80 (1 thread double shot	.053 oz.	--

3.5.4 7 Selvage.- The selvage shall be woven with 20 ends on each side of the ribbon.

3.5.4.8 Color Pattern.- The color patterns shall be as follows:

3-3/8 inches Ribbon

Total width inches	Width of stripes inches	Function of stripes	Color.	Cable No.	Finish	Color and Cable No. of filling yarn
	1/32	Edge & binder	*	*		
	5/32	ground	White	67101		
3-3/8	3	ground	Freedom Blue	Standard sample	Moire	White 67101
	5/32	ground	White	67101		
	1/32	Edge & binder	*	*		

*Twelve warp ends on the outside edge of ribbon to be Blue (standard sample) on both sides and the balance of the edge and binder to be White Cable No. 67101.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

1-3/8 inches Ribbon

Total width inches	Width of stripes inches	Function of stripes	Color	Cable No.	Finish	Color and Cable No. of filling yarn
	1/32	Edge & binder*	White	67101		
	1/16	ground	White	67101		
1-3/8	1-3/16	ground	Freedom Blue	Standard sample	Moire	White 67101
	1/16	ground	White	67101		
	1/32	Edge & binder*	White	67101		

*When this ribbon is used to fabricate bows, zinc coated malleable steel wire .025 inch in diameter shall be added to each edge.

11/16 inch Ribbon

Total width inches	Width of stripes inches	Function of stripes	Color	Cable No.	Finish	Color and Cable No. of filling yarn
	1/32	Edge & binder	White	67101		
	1/32	ground	White	67101		
11/16	18/32	ground	Freedom Blue	Standard sample	Moire	White 67101
	1/32	ground	White	67101		
	1/32	Edge & binder	White	67101		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

3/16 inch Ribbon

Total width inches	Width of stripes inches	Function of stripes	Color	Cable No.	Finish	Color and Cable No. of filling yarn
	1/32	Edge & binder	Freedom Blue	Standard sample		
3/16	1/8	ground	Freedom Blue	Standard sample	Plain	White 67101
	1/32	Edge & binder	Freedom Blue	Standard sample		

3.5.5 Containers.- Containers shall be fabricated from wood specified in 3.3.10, 3/8 plus or minus 1/64 inch in thickness and shall conform to the details and dimensions shown on Drawings 4-4-82 and 4-4-83 as applicable. The inside of each top and bottom panel for each container shall be scored in the grain direction with five (5) saw cuts 1/8 inch wide by 1/8 inch deep and approximately one inch apart. All corner joints shall be mitered (45 degrees) and all edges (exterior) including the corners shall be rounded to a 3/16 inch radius. The seal specified in 3.3.16, shall be centered on the top lid and recessed so as to be flush with the exterior surface of the lid. The lid and lower portion of all containers shall be joined using a hinge specified in 3.3.11, and a catch specified in 3.3.12. The hinge, striking plates, and outside surfaces of the lock assembly shall be recessed flush with the adjoining surfaces insuring that upon closure no gap exceeding 1/64 inch shall appear between the lid and the lower section of the container. The striking plate and catch shall be secured to the container by a minimum of 2,3/8 inch No. 1 round-headed, nickel plated wood screws. The hinge shall be secured to the container by means of a minimum of 4, 3/8 inch No. 2 flat-headed nickel plated wood screws. The complete interior of the container shall be stained and sealed using finish steps specified in 3.8.5.2, prior to insertion of the lid pad and dust shield. The lower section of each container shall have a dust shield securely cemented to and completely covering each interior wall and the interior bottom shall be covered with white paper specified in 3.3.13. The dust shield shall be fabricated in one piece with the two ends joined in one corner at the hinged end of the container. Dust shields and bearers shall be fabricated from fiberboard 1/8 inch in thickness, cut to the required length and width, and completely covered with white plush. The seamed side of the dust shield and bearer shall be cemented to the wall. The bottom pad for the type I container shall be fabricated using 14 ply bristol board. All other pads shall be fabricated from 1/8 inch fiberboard. The face, edges, and one inch along each edge of the reverse side of all pads shall be covered with silver gray plush. After the wire loops,tab attachments,lift tabs,and when applicable,elastic tapes have been securely anchored, the reverse side of the pad shall be covered with

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

paper specified in 3.3.13. The pad attachments (tabs) shall be blanked from 26 gauge steel and covered with silver gray plush. The wire loops shall be formed from gold color wire 1/32 inch in diameter and shall have an exposed length of 1/2 inch plus or minus 1/8 inch for type II containers and 5/8 inch plus 1/8, minus 0 inch for type I containers. The wire may be gold plated or covered with gold thread at the option of the manufacturer. The color of the wire shall match the color of the wire in the standard sample. A 3/64 inch nominal diameter hole located as shown on the applicable drawing shall be drilled thru the tray pad of the type I container and the pads for the type II containers. These holes shall be utilized in placing the lapel ribbon or lapel bows as applicable in the container. The inner surface of the hinge shall be covered with a piece of white satin cloth which shall be anchored beneath the lid pad in the lid section of the container and under the dust shield on the lower section of the container.

3.6 Detail of components.- Unless otherwise specified when a prong and clutch is specified, the prong and flat ball type clutch specified in Drawing B-13-12 shall be utilized.

3.6.1 Component A (Shoulder sash). The shoulder sash shall be fabricated from 3-3/8 inches wide ribbon specified in 3.5.4, and shall conform to the details and dimensions shown on Drawing 5-1-303. The sashes may be made from either one piece of ribbon 68 plus or minus 1/2 inches in length or two pieces 34 plus or minus 1/4 inches in length. The midpoint of the 68 inches long ribbon or two ends of the 34 inches long ribbon shall be folded to an angle of 10 plus or minus 1/2 degrees from the filling direction and machine stitched using stitch type 304 and 18 plus or minus 2 stitches to the inch. This stitching shall form the shoulder end of the sash with the front and back ribbons of equal length. All other stitching shall be hand stitching with 8 to 10 stitches to the inch. The free ends of the sash shall be coated on the reverse side of the ribbon with cement specified in 3.3.8, for a distance of 3/4 plus or minus 1/8 inch. When the cement has fully dried, the ends shall be cut as shown. At a point 6 inches from each ribbon end, a mark shall be centered and the ribbon shall be taken in as shown. The center mark on the front ribbon shall be superimposed on the center mark on the back ribbon, the ribbons adjusted so that to cross at an angle of 50 to 55 degrees and stitched using thread specified in 3.3.9. The rosette specified in 3.6.1.1, shall then be centered over the center mark and stitched firmly to the ribbon using thread specified in 3.3.9.

3.6.1.1 Rosette.- The rosette shall be fabricated from not less than 16 lineal inches of 3-3/8 inches wide ribbon specified in 3.5.4, cut to 1-3/8 inches in width, including one selvage edge. The selvage of the ribbon shall be on the outside of the rosette. The rosette shall be 3 inches +1/4,-0 in diameter, evenly folded and ruffled and stitched to a reinforcement of buckram 2-3/4 inches in diameter(a minimum of 14 and a maximum of 20 folds shall be equally spaced around the rosette). Care should be taken to insure the rosette is round and not oval.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

3.6.1.2 Sash badge.- The sash badge shall conform to the details and dimensions shown on figure 3. The sash badge shall be centered on the rosette.

3.6.2 Component B (Breast badge).- The breast badge shall conform to the details and dimensions shown on figure 4.

3.6.3 Component C (Lapel ribbon with device).- The class 1 lapel ribbon with lapel device (-1 on figure 5) shall be used with the type I decoration. The class 2 lapel ribbon with lapel device (-2 on figure 5) shall be used with the type II, style 1 decoration.

3.6.3.1 Lapel ribbon.- Lapel ribbons shall be fabricated of 3/16 inch wide ribbon specified in 3.5.4, and shall be as shown on Drawing 5-1-303. The lapel ribbon shall be 3 inches in length and one end tapered to 1/16 inch and the other end reinforced with a one inch by 1/8 inch reinforcement patch sewn to the reverse side of the ribbon. The patch shall be made from any durable fabric used in army uniforms and shall be dark in color. A lapel device specified in 3.6.3.2, shall be centered on the left end of the lapel ribbon and cemented to the lapel ribbon using cement specified in 3.3.8.

3.6.3.2 Lapel devices.- The lapel devices shall be as shown on figure 5. The devices for class 1 and class 2 lapel ribbons are identical except for base material and finish.

3.6.4 Component D (Lapel bow with device).- The class 1 lapel bow with lapel device shall be used with the type I decoration. The class 2 lapel bow with lapel device shall be used with the type II, style 2 decoration.

3.6.4.1 Lapel bows.- Lapel bows shall be fabricated from 3/16 inch wide ribbon specified in 3.5.4, and shall be as shown on Drawing 5-1-303. Bows may be made from one or more pieces, but any stitching required shall be hidden. The swallow-tail shall be made by applying cement specified in 3.3.8, to the back of the bottom ribbon for 1/8 inch from each end and cutting from each edge to a center mark 1/8 inch from each end. A lapel device specified in 3.6.4.2 shall be centered on and cemented to the lapel bow using cement specified in 3.3.8.

3.6.4.2 Lapel devices.- Lapel device shall be as specified in 3.6.3.2.

3.6.5 Component E (Miniature decoration with device).- The class 1 miniature decoration with ribbon device shall be used with the type I decoration and the class 2 miniature decorations with ribbon device shall be used with the type II decoration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

3.6.5.1 Miniature decoration.- The miniature decoration shall be as shown on figure 6. The pendant ribbon shall be fabricated from 11/16 inch wide ribbon specified in 3.5.4. The pendant ribbon length shall be adjusted so the overall length of the decoration shall be 2-1/4 inches plus or minus 1/16 inch. A ribbon device specified in 3.6.5.2, shall be centered on the pendant ribbon.

3.6.5.2 Ribbon device.- The ribbon device shall be as specified in 3.6.3.2, except a staple type prong as specified in figure 5, shall be the attaching device.

3.6.6 Component F (Service ribbon with ribbon device).- The class 1 service ribbon with ribbon device (-3 on figure 5) shall be used with the type I decoration. The class 2 service ribbon with ribbon device (-4 on figure 5) shall be used with the type II, style 1 and 2 decorations.

3.6.6.1 Service ribbon.- The service ribbon shall be as specified in 3.3.14, using 1-3/8 inches wide ribbon specified in 3.5.4. A ribbon device specified in 3.6.6.2, shall be centered on the service ribbon.

3.6.6.2 Ribbon device.- The ribbon device shall be as specified in 3.6.3.2, except a staple type prong specified on figure 5 shall be used as the attaching device.

3.6.7 Component G (Pendant with neck ribbon).- The pendant with neck ribbon shall be used with the type II, style 1 decoration.

3.6.7.1 Pendant.- The pendant of component G shall be as shown on figure 7.

3.6.7.2 Neck ribbon.- The neck ribbon shall be fabricated from 1-3/8 inches wide ribbon (without wired edges) specified in 3.5.4, and shall be as shown on Drawing 5-1-303. Both ends are to be narrowed to 11/16 inch by turning edges to butt against each other and overcast stitching as shown using 8 to 10 stitches to the inch. Three male snap fasteners shall be placed at either end, with three female snap fastners at the opposite end and side, as shown. The snap fasteners shall be as specified in 3.3.7.

3.6.8 Component H (Pendant with bow).- The pendant with bow shall be used with the type II, style 2 decoration.

3.6.8.1 Pendant.- The pendant for component H shall be as shown on figure 8.

3.6.8.2 Bow.- The bow shall be fabricated from 1-3/8 inches wide ribbon with wired edges specified in 3.5.4, and as shown on drawing 5-1-303. The center of the bow shall be covered with a separate piece of 1-3/8 inches wide ribbon

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

(without wired edges) with the edges folded under to conceal the white stripe and having an effective width of 1/2 inch. Cement specified in 3.3.8, shall be applied to the back of the final 1/2 inch of the bottom bow. After the cement has dried, the swallow-tail shall be made by centering a mark on the bottom ribbon 3/8 inch from each end and cutting from each edge of the end to the center mark. A .040 ± .005 in. bar with a pin and catch type attaching device in accordance with the service ribbon bar requirements for type II, style 1 of MIL-S-3951, to which the hanger of the pendant shall be soldered, shall then be firmly stitched to the back of the bow using thread specified in 3.3.9.

3.6.9 Component I (Type I container).- The container for the type I decoration shall conform to the details and dimensions shown on Drawing 4-4-82. The lid shall be completely filled with a low density polyurethene pad 1/2 inch thick covered by white satin cloth. The edges of the pad shall be beveled on an angle of 30 degrees to allow clearance for the dust shield in the lower section of the container upon closure. The pad shall be sufficiently compressible to permit closure of the lid over outstanding components to be attached to the hinged tray in the lower section of the container. The lower section of the container shall have two levels. The upper level shall be formed by the hinged tray supported by bearers. The bearer shall be 7 inches in length and 1/4 inch in height and shall be securely cemented to the dust shield. The top edge of the bearer shall be 3/8 inch from the bottom of the container at the hinged end of the tray and 3/4 inch from the bottom of the container at the free end of the tray. The cloth hinge of the tray shall allow the tray to rotate thru an arc of 90 degrees assuring complete access to the lower level of the container. The bottom pad shall be inserted under the tray bearers and shall rest directly on the interior bottom of the container. The bottom pad shall have a tab made from white satin cloth 1/4 inch wide and 7/8 inch of free length. The tab shall be located as shown.

3.6.10 Component J (Type II container).- The container for the type II decoration shall conform to the details and dimensions shown on drawing 4-4-83. The lid shall be completely filled with a low density polyurethene pad 1/2 inch thick and covered by white satin cloth. The lower section of the container shall have bearers 1/4 inch high running the length of the container and securely cemented to the dust shield and the bottom of the container. The pad shall rest on these bearers. Each pad shall have a tab made from white satin cloth 1/4 inch wide and 7/8 inch free length located at the hinged end of the container.

3.6.10.1 Style 1.- The type II, style 1 container shall be as specified in 3.6.10, only the pad of the container shall be the pad specified for the type II, style 1 container.

3.6.10.2 Style 2.- The type II, style 2 container shall be as specified in 3.6.10, only the pad shall be the pad specified for the type II, style 2 container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

3.7 Assembly.- Each decoration shall consist of components specified herein and assembled in the specified container.

3.7.1 Type I decoration.- The type I decoration (Presidential Medal of Freedom with Distinction) shall be made up of the following components:

Component A (Shoulder sash with rosette and sash badge).
#Component B (Breast badge).
Component C, class 1 (Lapel ribbon with device).
*Component D, class 1 (Lapel bow with device).
Component E, class 1 (Miniature decoration with device).
Component F, class 1 (Service ribbon with device).
Component I (Type I container).

3.7.2 Type II decoration.- The type II decoration (Presidential Medal of Freedom) shall be made up of the following components:

3.7.2.1 Style 1 (Male).-

Component G (Pendant with neck ribbon).
Component E, class 2 (Miniature decoration with device).
Component C, class 2 (Lapel ribbon with device).
Component F, class 2 (Service ribbon with device).
Component J, style 1 (Type II, style 1 container).

The clutch fasteners shall be placed in a plastic or wax paper bag and placed under the tray.

* (Component D shall be placed in a clear plastic envelope and placed loose inside the container).

3.7.2.2 Style 2 (Female).-

Component H (Pendant with bow).
Component E, class 2 (Miniature decoration with device).
Component D, class 2 (Lapel bow with device).
Component J, style 2 (Type II, style 2 container).

3.8 Finish.- Components shall be finished as specified on the applicable figure and as specified herein. The finishes of the components shall match the color and finish of the applicable standard sample (see 3.1) or applicable approved sample (see 3.2). When plating is specified the entire pendant, badge, or

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

device except for the attaching device shall be plated. In addition to the finish specified on the applicable figure, sterling silver devices and the sterling silver seal shall be lacquered as specified in 3.8.4. At the option of the contractor gold plated items may also be lacquered.

3.8.1 Cutting down.- When necessary to remove nicks, scratches, inequalities, pores, or other blemishes, the items may be cut down by means of grease or oil buffing, provided the item is not cut down to the extent that any of the design is reduced or obliterated.

3.8.2 Gold plating.- Prior to plating, the item shall be clean of matter that may affect the gold plating. Gold specified in 3.3.2 shall be used for gold plating. The plating shall be nonporous and continuous over the plated surface. There shall be no cut-through, peeled, or blistered plating. The use of white metals as an undercoating for gold will not be permitted. No visible chemical reaction, such as evolution of gases shall appear when tested as specified in 4.4.2. Gold plated items may be lacquered at the option of the manufacturer.

3.8.3 Enameling.- Enameling shall be accomplished using enamel specified in 3.3.5. The enamel shall be charged, fired, and when applicable, stoned level with the dykes. The enamel shall be lapped, felted, or wheel polished to produce a hard glass like finish. The finish shall be adherent and free from bubbles, pits, foreign inclusions, cracks, burned edges, or darkened enamel.

3.8.3.1 Enamel colors.- Enamel colors shall match the color of the standard sample (see 3.1) or the approved sample (see 3.2).

3.8.4 Lacquering.- When lacquering is required, the entire device, excluding the attaching device, and the seal shall be completely covered by lacquer specified in 3.3.6. The dry lacquer film shall be continuous, level, and adherent, and free from lint, dust, and other inclusions. There shall be no change on the appearance of the lacquered surface except for a slight yellowing of the highlights and not more than two spots, each less than 1/16 inch largest dimensions, when tested as specified in 4.4.5.1. The test specified in 4.4.5.1 does not apply to gold plated items. When tested as specified in 4.4.5.2, the tissue paper shall not adhere to the lacquered surface.

3.8.5 Container.-

3.8.5.1 Exterior.- The finish of the container shall match the finish of the standard sample. The finish for the outside and the rims of the container may be obtained by the following procedure:

(1) Stain to uniform color (Lilly 3523 or equal).
(2) Wash coat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

(3) Scuff sand.
(4) Apply filler.
(5) Remove excess filler.
(6) Dry completely.
(7) Apply lacquer sealer.
(8) Dry completely.
(9) Sand lightly.
(10) Apply coat of dull flat (furniture) lacquer.
(11) Dry completely.
(12) Apply second coat of dull flat (furniture) lacquer.
(13) Dry completely.
(14) Wax and rub.

3.8.5.2 Interior.- The interior of the container shall be finished with steps 1, 7, 10, and 11 of paragraph 3.8.5.1.

3.9 Marking for identification.- Component B (Breast badge), the pendant of component G (Pendant with neck ribbon), and the pendant of component H (Pendant with bow) shall be engraved with a serial number as specified in the contract or order (see 6.2). All engraving shall be accomplished by panographing using condensed type face roman letters and numerals in the sizes specified herein.

3.9.1 Component B (Breast badge).- The reverse surface of the breast badge shall be engraved with the words "PRESIDENTIAL MEDAL OF FREEDOM" using 3/16 inch high letters. The location of the engraving shall be as shown on figure 4. The serial number shall be preceded by the letter "D" and a hyphen (-). Both the serial number and the letter "D" shall be engraved using 3/32 inch high letters and numerals. The 3/16 inch high lettering shall be .015 inch, plus .005, - 0 inch deep and the 3/32 inch high letters and numerals shall be .005 inch, plus .005, - 0 inch deep.

3.9.2 Pendant for component G (Pendant with neck ribbon).- The serial number shall be engraved in the location shown on figure 7. The engraved number shall be 3/64 inch high and shall be a minimum of .005 inch deep.

3.9.3 Pendant for component H (Pendant with bow).- The serial number followed by a hyphen (-) and the letter "L" shall be engraved in the location shown on figure 8. The engraved numbers and the letter "L" shall be 3/64 inch high and shall be a minimum of .005 inch deep.

3.9.4 Engraving of the recipient's name.- When specified (see 6.2), the recipient's name shall also be engraved on the decorations using condensed type

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

face Roman Letters. The size and depth of the letter shall be as specified below: The recipient's name shall be centered in the unembossed areas.

	Size of letters		Depth of lettering
	Upper Case	Lower Case	
For type I	3/16 inch	1/8 inch	$.015 \pm {}^{.005}_{.000}$
For type II	1/8 inch	3/32 inch	$.005 \pm {}^{.005}_{.000}$

3.10 Government loaned property.-

3.10.1 Hubs.- Hubs loaned by the Government shall be used for making the contractor's working dies necessary for one contract or order.

3.10.2 Standard sample.- Standard samples loaned by the Government shall be used for matching color and finish only and upon approval of the first article the standard sample shall be returned immediately to the contracting officer.

3.11 Workmanship.- Decorations or components of decorations shall be clean, well made and shall meet the acceptable quality levels established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.2 First article inspection.- When a first article is required, the first article shall be examined in accordance with the classification of defects listed in paragraph 4.3.2.1. The first article shall be tested in accordance with paragraph 4.3.3.

4.3 Sampling for inspection and acceptance.- Sampling for inspection and acceptance shall be in accordance with Standard MIL-STD-105, except where otherwise indicated.

4.3.1 Inspection of materials.-

4.3.1.1 Testing of materials.- In addition to the quality assurance provisions of the subsidiary specifications and drawings, inspection shall be performed on materials listed in table III for the test characteristics shown therein. The inspection level shall be S-1 and the acceptable quality level (AQL) shall be 2.5 defects per hundred units for requirements which are applicable to the individual unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

TABLE III - Testing of Materials.

Component or material and lot expressed in terms of	Characteristics	Requirement paragraph	Test Method*	Requirement Applicable to		Number of determinations per sample unit	Results reported as	Sample unit
				Individual unit	Lot average			
Copper base alloy (1 pound)	Chemical composition	3.3.1	4.4.1	-	x	2 composite	nearest 0.1% of each element	one 4 inch by 4 inch piece or equivalent for each alloy
Yarn (1 pound)	Denier	3.5.4.6	Std coml.	x	-	1	to the nearest whole no.	one tube, cone or spool
	Ply	3.5.4.6	Visual	x	-	1	Pass or fail	
	Colorfastness: Crocking	3.5.4.4	4650	x	-	1	satisfactory or unsatisfactory	
	Wet-dry cleaning	3.5.4.4	4622	x	-	1	or excellent, good, fair, or poor	
	Water	3.5.4.4	4630	x	-	1		
	Light	3.5.4.4	4660	x	-	1		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

TABLE III - Testing of materials. (cont'd)

Component or material and lot expressed in terms of	Characteristics	Requirement paragraph	Test Method*	Requirement Applicable to		Number of determinations per sample unit	Results reported as	Sample Unit
				Individual unit	Lot Average			
Ribbon (1 yard)	Texture:							3 continuous yards
	Warp	Table II	5050	x	-	5	average of 5 determined to nearest whole number	
	Filling	Table II	5050	x	-	5	average of 5 determined to nearest whole number	
	Weight	Table II	5040	x	-	1	to nearest 0.01 oz	
	Tensile strength	Table II	5100	x	-	5	average of 5 determined to nearest 1.0 lb.	
	Weave	3.5.4.5	Std coml	x	-	1	pass or fail	
	Presence of Sulfur Dyes	3.5.4.2	2020	x	-	1	pass or fail	
	Color arrangement	3.5.4.8	Visual	x	-	1	pass or fail	
	Width of individual stripes	3.5.4.8	Visual	x	-	1	pass or fail	
Wood board ft	Moisture	3.3.10	4.4.8	x	-	3	average nearest 0.1%	1 board at the time of cutting
	Slope of grain	3.3.10	4.4.10	x	-	1	pass or fail	1 board

*Test methods specified shall be in accordance with FED-STD-191, when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

4.3.1.2 Certification of compliance.- Materials listed below may be accepted on the basis of a contractor's certification of compliance for the requirements specified in applicable paragraphs of this specification.

Material	Characteristics	Requirement Paragraph
Solder	Material identification	3.3.4
Cement	Material identification	3.3.8
Yarn*	Fiber identification	3.5.4.1
	Brightness	3.5.4.1
	Number of filaments	3.5.4.1
	Presence of sulfur	3.5.4.2
Pin	Material identification	3.3.1
Gold for plating	Material identification and karat	3.3.2
Sterling silver	Fineness	3.3.3
Snap fastener	Material identification, finish, type and size	3.3.7
Hinge, catch & Striking plate	Plating identification	3.3.11 and 3.3.12
Paper	Material identification, ply, and thickness	3.3.13
Wire for 1-3/8" ribbon bow	Material identification and diameter	3.5.4.8
Pad attachment	Material identification and gauge	3.5.5
Rosette reinforcement	Shall be buckram	3.6.1.1
Lid pad	Material identification and thickness	3.6.9 and 3.6.10

* Certification of compliance will be accepted only for the characteristics indicated. Testing for the other cited characteristics shall be performed in accordance with paragraph 4.3.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

4.3.2 Inspection of the end item.-

4.3.2.1 Visual examination of end item.- The defects found during examination shall be classified in accordance with 4.3.2.1.1 and 4.3.2.1.2. The lots shall be inspected in accordance with 4.3.2.1.3. The unit of product for these examinations shall be one boxed decoration of each type and style or a finished component, as applicable.

4.3.2.1.1 Examination of decoration or component of decoration for defects in finish, design, material, construction, workmanship, and marking.- Defects designated by an asterick shall be classified as major when seriously affecting appearance or serviceability and minor when affecting appearance or serviceability but not seriously.

Examine	Defects	Classification Major (*)		Minor
Color and finish of metal components	Does not match the standard or approved sample as follows:			
	- Finish has not been sufficiently relieved or has been excessively relieved.....		(*)	
	- Not highlighted to the same extent as the approved sample; or it is excessively highlighted.....		(*)	
	Background not finished as specified.....	X		
	Hanger bar is not finished the same as the pendant to which they are attached.....		(*)	
	Pit, scale, nick, scratch, pinhole, crack, rupture, segregation, foreign matter, or other blemish.....		(*)	
	Buff, drag, blushed, or cloudy finish.....		(*)	
	Surface not clean or discolored, i.e., spot, stain, or speck.....		(*)	
	Not plated or plating is not the specified type.....	X		
	Plating not continuous, cut-through, or porous.....	X		
	Plating surface is not smooth or not adherent, i.e., is flaking, peeling, or blistered.....	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	(*)	Minor
Color and finish of enameled surfaces (as applicable)	Color or shade of enamel does not compare favorably with standard or approved sample.....	X		
	Discoloration, such as spot, stain, or speck.....		(*)	
	Not enameled.....	X		
	Enamel is not type specified.....	X		
	Enamel is cracked, chipped, or crazed.....		(*)	
	Bubble, pit, lump, foreign inclusion, hole, lap, overrun, or skip in enamel.....		(*)	
	Fishscale, copperheads burnoffs, scale, or specking in enamel.....		(*)	
	Scumming, darkened, burned edges, or lack of gloss in enamel.....		(*)	
	Enamel not stoned and polished level with the dikes, when applicable, e.g., contains high or low spots.....		(*)	
	Enamel not convex within dikes, or contains high or low spots, when applicable.....		(*)	
	Any enamel not contained within prescribed outline of design.....		(*)	
Color and finish of container Exterior surface	Does not match standard or approved sample.....		(*)	
	Stained or discolored.....		(*)	
	Light colored edge.....		(*)	
	Foreign matter embedded, gouge, scratch, scuff, chipout, sanding marks, or other imperfections ...		(*)	
Interior surface	Plush, elastic tape, or satin does not match standard sample for color, finish, or texture		(*)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	(*)	Minor
	Visible imperfection in plush, elastic tape, or satin.		(*)	
	Wood not stained as specified.		(*)	
	Plush, elastic tape, or satin stained, discolored, or dirty.		(*)	
	Plush, elastic tape, or satin torn, cut, frayed, contains hole or otherwise damaged.		(*)	
Lacquering (as applicable)	Not lacquered, when required	X		
	Lacquer forms noticable runs		(*)	
	Not free from lint, dust or other inclusions		(*)	
	Lacquer coating is not smooth or is not adherent, e.g., is flaking, blistering, or peeling.		(*)	
Design	Any operation not in accordance with the specified requirements	X		
	Any detail altered, i.e., does not conform to Government hub or drawing.	X		
	Warp, twist, or distortion producing irregular surface contour or outline.		(*)	
	Detail struck over, resulting in a double impression.	X		
Quality of metal	Surface is pitted, porous, crystalline, open grained, or otherwise impaired.	X		
Quality of wood	Not walnut.	X		
	Not quarter cut.		(*)	
	Shake, check, fracture, split, break, loosened grain, or splinter.	X		
	Torn or raised grain, knot, mineral streak, decay, worm hole, or other imperfection.		(*)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	(*)	Minor
Construction and workmanship of metal components	Any component (including attaching device) missing, bent, twisted, broken, deformed, or otherwise impaired		(*)	
	Not connected or joined as specified, or operation is poorly accomplished	X		
	Any mutilation, such as machine mark, dig, dent, or scratch		(*)	
	Pin hole, crack, or rupture		(*)	
	Not trimmed to the die-struck edge		(*)	
	Dikes are distorted		(*)	
	Any edge not clean and smooth, e.g., burr, drag, step, or roughness		(*)	
	Design or shape is damaged, distorted, or altered by piercing operation		(*)	
	Component parts are not completely joined by solder (when required)		(*)	
	Metal burned or reduced in soldering or acid cleaning		(*)	
	Solder spatter visible on front or edge of component		(*)	
	Solder spatter on back of component exceeding 1/16 inch in greatest dimension			X
	Fastening device is not as specified	X		
	Fastening device not positioned as specified, out of alignment, or components are off-center by 1/8 inch or more	X		
	Point of the pin extends less than 1/32 inch beyond rotor of the safety catch	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	(*)	Minor
	Point of the pin protrudes more than 1/32 inch beyond the safety catch.....			X
	Pin blunted, affecting use.....		(*)	
	Pin will not engage the catch or rotor will not operate.....	X		
	Attaching device (other than pin and safety catch) is defective, e.g., will not operate as intended.....		(*)	
Construction and workmanship of container	Corner joints not mitered.....			X
	Exterior edges (including corners) not rounded to 3/16 inch radius.....		(*)	
	Direction of grain not in the direction specified.	X		
	Pad not covered as specified.....	X		
	Cover or bottom warped.....		(*)	
	Cover or bottom out of alignment.....		(*)	
	Bearers not covered as specified.....	X		
	Cover cannot be closed.	X		
	Catch, hinge, or seal not countersunk or not correctly positioned.....	X		
	Hinge or catch binds or does not function properly or smoothly.....		(*)	
	Any component missing, damaged, or otherwise impaired.....		(*)	
	Joint not type specified.....	X		
	Dust shield does not cover or is not securely cemented to interior wall.....		(*)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	(*)	Minor
	Wood defect filled with plastic wood or other filler material.....		(*)	
	Hinge not covered as specified.....	X		
	Open, loose, or unsound glued joint.....		(*)	
Materials	Any component not fabricated of the specified material (unless otherwise indicated herein)....	X		
Inscription and marking	Missing, incorrect, illegible or poor legibility, misspelled, misplaced, or is not applied in the specified manner.....	X		
	Non-uniformity of depth in engraved lettering...	X		
	Serial number not as specified.....	X		
	No serial number or incorrect number.....	X		
Quality of ribbon material and attachment	Material soiled or stained.....	X		
	Color or color pattern is not as specified.....	X		
	Shade does not compare favorably with the standard or approved sample.....		(*)	
	Finish of ribbon not as specified (e.g., is not moire when required).....	X		
	Material imperfection such as end out, broken or missing yarn, tear, cut, hole, float, or defective selvage.....		(*)	
	Any ribbon component not formed as specified or not as shown on drawing.....		(*)	
	Smash	X		
	Pinked or swallow-tailed end of ribbon not cemented when required.....	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	(*)	Minor
	Coarse end, knot, slub, or uneven texture.....		(*)	
	Filling yarn showing between ground and binder...		(*)	
	End of ribbon cemented, but not to specified extent.....			X
	Ribbon not clinched to bar (when required) e.g., clip slips laterally under slight pressure.....	X		
	Evidence of stain or discoloration of the face side of the ribbon.....		(*)	
	Distorted drape on miniature ribbon.....		(*)	
	Ribbon is not attached to ribbon bar in the specified manner.....	X		
	Does not contain wired edge (when required).....	X		
	Snap fasteners (when required) missing, misplaced, or damaged.....	X		
	Snap fastener not finished as specified.....		(*)	
	Snap fastener is not securely attached.....		(*)	
	Clip or ribbon bar metal is exposed more than 1/32 inch on either side.....	X		
	Clip or ribbon bar metal is exposed more than 1/64 inch, but not more than 1/32 inch.....			X
Sewing (as applicable)	Not sewn or not tacked where required.....	X		
	Sewing or tacking is not neatly or securely accomplished.....		(*)	
	Color of tacking thread does not match color or sections of the ribbon sewn.....		(*)	
	Tacking not knotted in location required.....			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	(*)	Minor
	Color of machine thread does not match color of tacking thread.....			X
	Broken stitch.....			X
Assembly	Not symmetrical.....		(*)	
	Not accomplished as specified.....		(*)	
	Any component missing.....	X		
	Component does not fit within container as required.....		(*)	

4.3.2.1.2. Examination of decoration and/or components for defects in dimensions.- Any dimension that is not within the specified tolerance shall be classified as a defect.

4.3.2.1.3 Inspection levels and AQL'S.- The inspection levels and acceptable quality levels (AQL'S)expressed in defects per hundred units shall be as follows:

	Inspection Level	AQL'S Major	Total
For defects applicable to 4.3.2.1.1	II	0.10	10.0
For defects applicable to 4.3.2.1.2	S-3	(one class)	2.5

4.3.3 Testing of end item.- Testing of the completely fabricated decorations shall be performed in accordance with table IV for the characteristics shown therein. The sample unit shall be one gold plated, one lacquered, and one enameled decoration as applicable. The inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

TABLE IV - Testing of the end item.

Characteristics	Requirement paragraph	Test Method	Requirement applicable to		Number determinations per sample unit	Results reported as
			Individual unit	Lot average		
Test for gold plating	3.8.2	4.4.2	X	-	3	Pass or fail
Test for pins, joints, and safety catches	3.5.3.2	4.4.3	X	-	1	Pass or fail
Test for solder joints	3.5.2	4.4.4	X	-	1	Pass or fail
Test for lacquer						
Liver of sulfur test	3.8.4	4.4.5.1	X	-	1	Pass or fail
Tackiness test	3.8.4	4.4.5.2	X	-	1	Pass or fail
Test for clutches	3.5.3.1	4.4.6	X	-	1	Pass or fail
Test for cement	3.3.8	4.4.8	X	-	1	Pass or fail
Test for fused Joints	3.5.2	4.4.9	X	-	1	Pass or fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing, and marking requirements of section 5, of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing.
	Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, inadequate stapling.
	Bulging or distortion of containers.
Weight or content	Number of intermediate packages is more or less than required; gross or net weight exceeds requirements.

4.4 Tests.-

4.4.1 Chemical composition test.- Chemical composition shall be determined in accordance with test method 111 of FED-STD-151. Results shall be evaluated to determine compliance with the requirements specified in 3.3.1.

4.4.2 Test for gold plating.- Test acid shall be applied as follows: Place a drop of test acid (each drop to be 1/8 inch diameter minimum), on three different spots on the back surface, allowing the drops to remain for not less than two minutes. During this time the surface shall be inspected to determine compliance with the requirements specified in 3.8.2. The test acid applied at room temperature, shall consist of a solution containing 50 percent by volume of CP nitric acid (specific gravity 1.42) and equal volume of distilled water.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

4.4.3 Test for pins, joints, and ball type safety catches.- Safety catches and pins shall be opened and closed ten times, after which, the pins, joints, and safety catches shall be inspected to determine compliance with the requirements specified in 3.5.3.2.

4.4.4 Test for soldered joints.- Items to be tested shall be placed in an oven maintained at 1065 degrees F. for not less than 15 minutes. While at the specified temperature, items shall be lifted by the smaller part and the soldered joint shall be inspected to determine compliance with the requirements specified in 3.5.2.

4.4.5 Test for lacquer.-

4.4.5.1 Liver of sulfur test.- Items to be tested shall be immersed in 2 percent by weight CP liver of sulfur (Sulfurated Potash) water solution, at a temperature of 100 degrees F. (Plus or minus 10 degrees F.), for a period of three minutes. The items shall then be removed and rinsed in warm, then cold, then hot water, after which they shall be wiped gently with an absorbent cellulose material or whirled to remove residual moisture, allowed to air dry at room temperature for a period of one hour. After this hour they shall be inspected to determine compliance with the requirements specified in 3.8.4.

4.4.5.2 Tackiness test.- At room temperature (60 to 80 degrees F.), press a piece of tissue paper against the finished lacquered surface for 15 seconds, using any pressure capable of being exerted between thumb and two fingers, after which the pressure shall be released and the item inspected to determine compliance with the requirement specified in 3.8.4.

4.4.6 Test for clutches.- The clutches shall be removed and replaced on the prong ten times, after which an attempt shall be made to remove the clutch without depressing the release wings. The clutch shall then be examined to determine compliance with the requirements of 3.5.3.1.

4.4.7 Moisture content of wood.- Moisture content of the wood shall be determined in accordance with Specification MIL-W-6110.

4.4.8 Test for cement.- After the cemented surface has dried, the cement covered ribbon shall be slowly bent 180 degrees around a 1/8 inch in diameter rod. The cement shall then be examined to determine compliance with 3.3.8. The test shall be performed at ambient temperatures.

4.4.9 Test for fused joints.- Fused prongs shall be bent back and forth through an angle of 90 degrees (45 degrees on each side of the vertical) until the prong breaks. The fused joint shall then be inspected to determine compliance with 3.5.2. A bending tool in the form of a 45 degree template may be used in this test.

4.4.10 Slope of wood grain.- The slope of grain may be determined by combining the grain direction of two adjacent faces of a square or rectangular piece. When one of these faces is straight grained. the true slope of grain is shown on

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

the other face. When there is a slope on both faces, the true or combined slope is greater than the slope on either face. Slope of grain shall be determined with a Teco Slope of Grain Detector supplied by the Timber Engineering Co., Inc., Washington, D.C. to determine compliance with 3.3.10.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.-

5.1.1.1 Component.- Each component except containers, lapel bows, lapel ribbons, and service ribbons shall be mounted on a chipboard pad covered on one side with paper having a cobalt blue or other acceptable colored plush or suede finish. The pads shall be slotted to securely seat the fastening device with the component centered on the pad. Each pad mounted component shall be completely inclosed in a wrap of not less than three thickness of white anti-tarnish tissue paper conforming to type II, grade A, class 1 of UUP-553. Each component shall be packaged in a two-piece jeweler's hinged lid, full telescope set-up paperboard box, having the base hinged to the lid by means of a strip of colored embossed paper securely affixed to the width dimension of the box. The entire box except the inside bottom, shall be covered with a Freedom Blue or other acceptable colored embossed paper.

5.1.1.2 Container.- Each container shall be inclosed in an envelope type bag constructed from flannel specified in 3.3.8, of any acceptable color (see 6.2), then placed in a white cardboard two piece semi-telescope type box. The envelope type bag shall be fabricated from two pieces of flannel and shall be sufficiently large to allow the container to be easily inserted or removed. All seams and raw edges shall be stitched using seam type FSa-1 of FED-STD-751.

5.1.1.3 Lapel bows, lapel ribbons, and service ribbons (with devices).- Each lapel bow, lapel ribbon, and service ribbon with devices shall be placed in a plastic envelope and one hundred (100) of each class only shall be packaged in a snug-fitting set-up paperboard box conforming to type I, grade A, class A, style 4 of PPP-B-676. Box closures shall be in accordance with the appendix of the box specification.

5.1.1.4 Decoration.- When type I or type II, style 1 or 2 decorations are ordered, each component shall be mounted in the applicable container. The container shall be packaged as specified in 5.1.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

5.1.2 Level C.- Each component except for the container shall be packaged in accordance with industry's practice.

5.1.2.1 Container.- Containers shall be packaged as specified in 5.1.1.2.

5.1.3 Decoration.- When type I or type II, style 1 or 2 decorations are ordered, each component shall be mounted in the applicable container. The container shall be packaged as specified in 5.1.1.2.

5.2 Packing.- Packing shall be level B or C as specified (see 6.2).

5.2.1 Level B.- Decorations and/or components, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to class Domestic, grade 275 of PPP-B-636. All flaps of the fiberboard shipping container shall be securely sealed with an adhesive commercially used for the specific product being packed by application throughout the entire area of contact between the flaps, or by a combination of metal stitching the bottom flaps and sealing the top flaps with adhesive. Net weight of the contents of each shipping container shall not exceed 65 pounds.

5.2.2 Level C.- Decorations and/or components, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with rules or regulations of the carrier applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Interior packages.- Each box except container boxes shall be legibly labeled on one end to indicate the following information.

Stock number
Nomenclature
Quantity
Contract number
Manufacturer's name

6. NOTES

6.1 Intended use.- The decorations covered by this specification are intended to be awarded by The President of the United States to selected individuals to provide tangible evidence of public recognition for especially meritorious contribution to security or national interests of the United States, to world peace or to cultural or other significant public or private endeavors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Type, style, or components required (see 1.2).

(c) When a standard sample will not be furnished (see 3.1).

(d) When a first article is not required (see 3.2).

(e) Serial number for breast badge and pendants (see 3.9).

(f) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

(g) Color of container bag required (see 5.1.1.2).

6.3 Color cable numbers.- The origin of the cable numbers included in this specification is as follows:


The 67,000 series is from the DOD Standard Shades for Heraldic Yarns for Embroidery and Ribbons.


Project No. 8455-A381


Preparing Activity:


The Institute of Heraldry
United States Army
ARMY - IH


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.







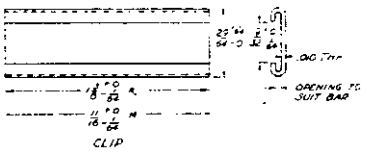


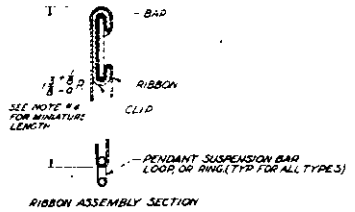


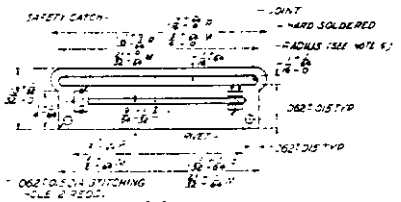

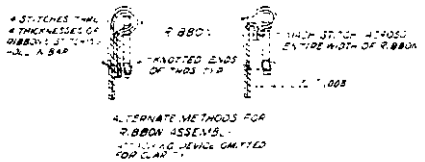








NOTE:
1. "R" DESIGNATES REGULAR SIZE
"M" DESIGNATES MINIATURE SIZE
2. PIN STEM TO BE .036 ± .001 DIA PREASSEMBLED WITH RIVET FOR "R"
3. SAFETY CATCH TO BE BALL TYPE SIDE OPENING FOR REGULAR SIZE AND BALL TYPE TOP OPENING FOR MINIATURES
4. PENDANT RIBBON LENGTH OF THE MINIATURE SHALL BE ADJUSTED SO THE OVERALL LENGTH (INCLUDING PENDANT) IS $2\frac{5}{8} \pm \frac{1}{16}$
5. RADIUS IS REQUIRED ON REGULAR SIZE ONLY MINIATURE SIZE TYPE II BARS MAY BE RECTANGULAR SHAPED WITHOUT THE RADIUS

This is a miniature copy of THE INSTITUTE OF HERALDRY Dwg. No. 4-4-66 revision std 3 Feb 71. This copy is furnished for information only, the Dwg. referenced in para. 2.1 governs.


FIGURE 1

PENDANT RIBBON BARS
REGULAR AND MINIATURE
ASSEMBLY AND DETAILS


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

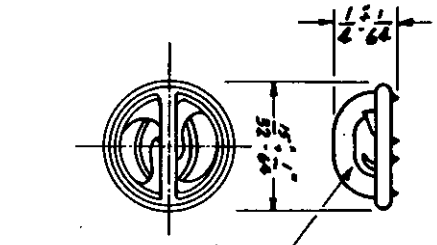


CLUTCH

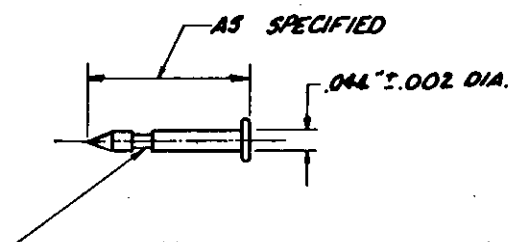

PRONG



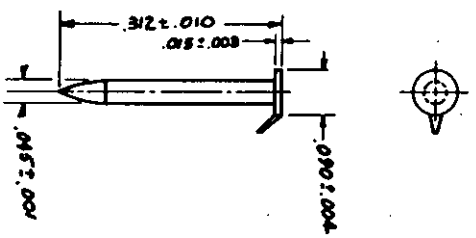


FLAT BALL TYPE CLUTCH PRONG WITH PICK


This is a miniature copy of THE INSTITUTE OF HERALDRY Dwg. No. B-13-12, revision dtd 5 DEC 73. This copy if furnished for information only, the Dwg. referenced in para. 2.1 governs.

FIGURE 2


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

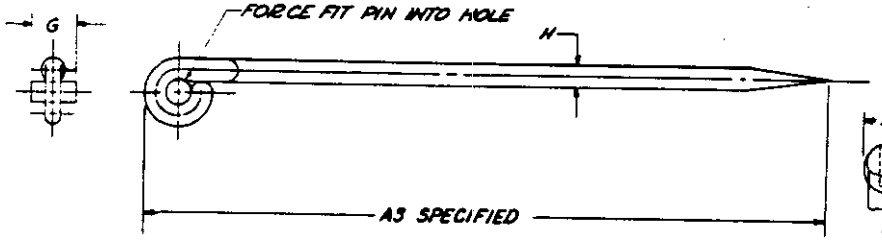

PIN STEM

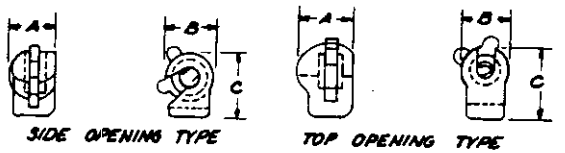

CATCH

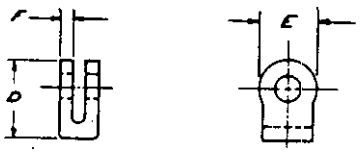

JOINT

LGTH OF PIN STEM	A	B	C	D	E	F	G	H
TO 11/16"	.120	.102	.127	.110	.087	.025	.087	.038±.002
* 3/4" TO 2"	.132	.111	.150	.135	.106	.028	.098	.036±.002
* 2 1/16" TO 2 1/2"	.140	.132	.180	.154	.123	.032	.108	.045±.002


* SIDE OPENINGS ONLY

FIGURE 2A

This is a miniature copy of
THE INSTITUTE OF HERALDRY
Dwg. No. B-13-5, dtd 14 Dec 70
This copy is furnished for
information only. The Dwg.
referenced in para. 2.1 governs.

ATTACHING DEVICES HERALDIC
PIN & CATCH TYPE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

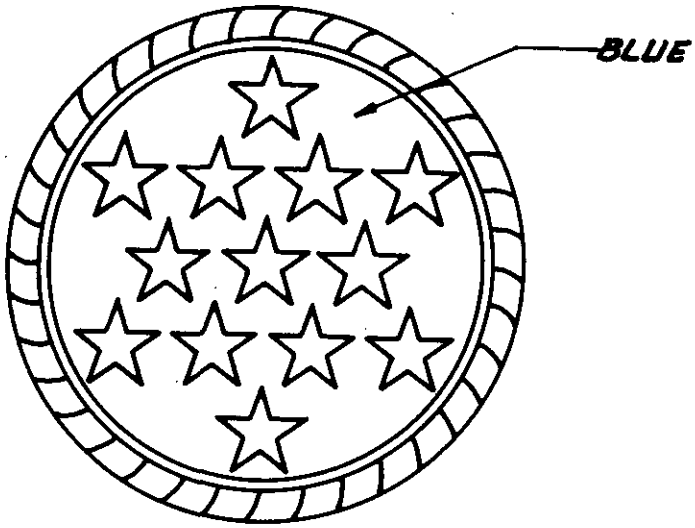

MATERIAL: GILDING METAL
DIMENSIONS (INCHES):
DIAMETER: 2 (REF)
THICKNESS (AT ROPE EDGE): .085 ± .005
FINISH: ENAMELED, ROSE GOLD PLATED, SATIN FINISH, OBVERSE LIGHTLY POLISHED

NOTES: 1. PRONGS SHALL BE 3/8 ± 1/64 INCH IN LENGTH.


2. THREE PRONGS SHALL BE LOCATED ON A 1-3/8 ± 1/32 INCH CIRCLE, 120 DEGREES APART, WITH ONE PRONG LOCATED AT THE TOP OF THE VERTICAL CENTER LINE OF THE BADGE.

3. MOCK FORCER MAY BE USED TO BRING UP THE CENTER.

4. ENAMEL AREA SHALL BE AS INDICATED. THE ENAMEL SHALL MATCH THE ENAMEL OF THE STANDARD SAMPLE AND CHIP NO. 18.

F I G U R E 3 - Sash badge for Component A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

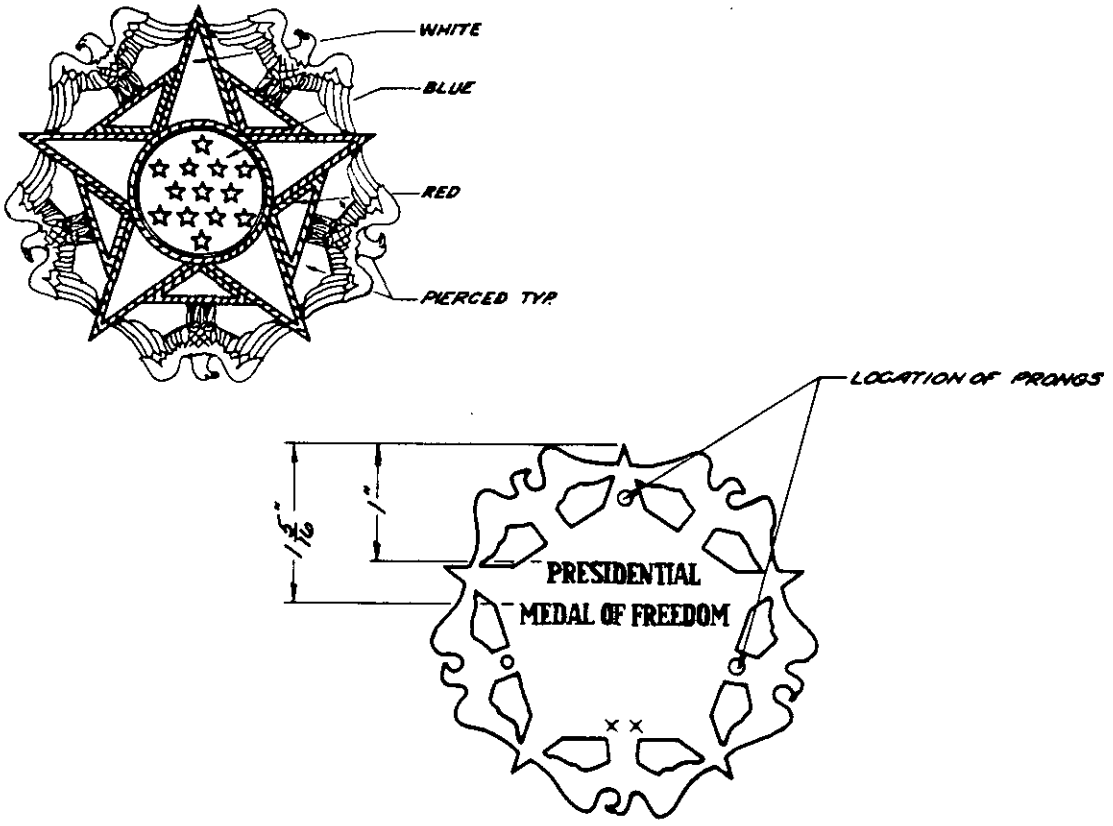

MATERIAL: GILDING METAL
DIMENSIONS (INCHES):
DIAMETER (INCLUDING CIRCLE): 3-1/4 (REF)
THICKNESS:
AT EAGLE'S HEAD AND ROPE AT EAGLE'S FEET: $.100\ ^{+.000}_{-.010}$
AT CENTER: $.175\ ^{+.000}_{-.010}$
FINISH: ENAMELED, ROSE GOLD PLATED, OBVERSE LIGHTLY POLISHED

NOTES: 1. PRONGS SHALL BE 3/8 ± 1/64 INCH IN LENGTH AND SHALL BE LOCATED AS SHOWN.

2. ENGRAVING SHALL BE LOCATED AS SHOWN AND SHALL BE AS SPECIFIED IN THE BASIC DOCUMENT.


3. WHITE ENAMEL SHALL BE BUILT UP TO FOLLOW THE CURVATURE OF THE STAR.

4. ENAMEL AREAS SHALL BE AS INDICATED. ENAMEL COLORS SHALL MATCH THE ENAMEL THE STANDARD SAMPLE AND THE COLOR CHIP NUMBERS LISTED BELOW:

COLOR	CHIP NUMBER
Red	1
White	28
Blue	18

F I G U R E 4 - Component B

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

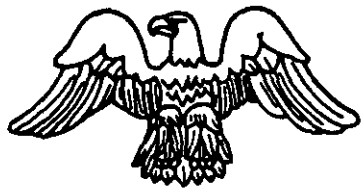

DASH NO.
-1: Lapel Device, Presidential Medal of Freedom with Distinction
-2: Lapel Device, Presidential Medal of Freedom
-3: Ribbon Device, Presidential Medal of Freedom with Distinction
-4: Ribbon Device, Presidential Medal of Freedom


MATERIAL:
-1, -3: RED BRASS
-2, -4: STERLING SILVER
DIMENSIONS (INCHES):
HEIGHT (OVERALL): 5/16 (REF)
WIDTH (OVERALL): 11/16 (REF)
THICKNESS (THICKEST POINT): .075, +.000, -.010
FINISH:
-1,-3: ROSE GOLD PLATED, SATIN FINISH, OBVERSE LIGHTLY POLISHED
-2,-4: LIGHTLY OXIDIZED, SATIN FINISH

NOTES: 1. THE ATTACHING DEVICE FOR DASH NOS. 1 AND 2 SHALL BE PRONG AND CLUTCH. THE PRONG SHALL BE CENTERED ON AND SOLDERED OR FUSED TO THE REVERSE OF THE DEVICE.

2. THE ATTACHING DEVICE FOR DASH NOS. 3 AND 4 SHALL BE A STAPLE TYPE PRONG. THE PRONG SHALL BE FABRICATED FROM NICKEL SILVER WIRE (.026 NOMINAL DIAMETER) AND SHALL BE 5/16 $\pm$ 1/64 INCH IN LENGTH. THE PRONG SHALL BE CENTERED ON AND SOLDERED OR FUSED TO THE REVERSE OF THE DEVICE. THE POINT OF THE PRONGS SHALL BE EITHER CONE POINTED OR BIAS CUT.

F I G U R E 5 - Lapel and Ribbon device for Components C, D, E & F

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

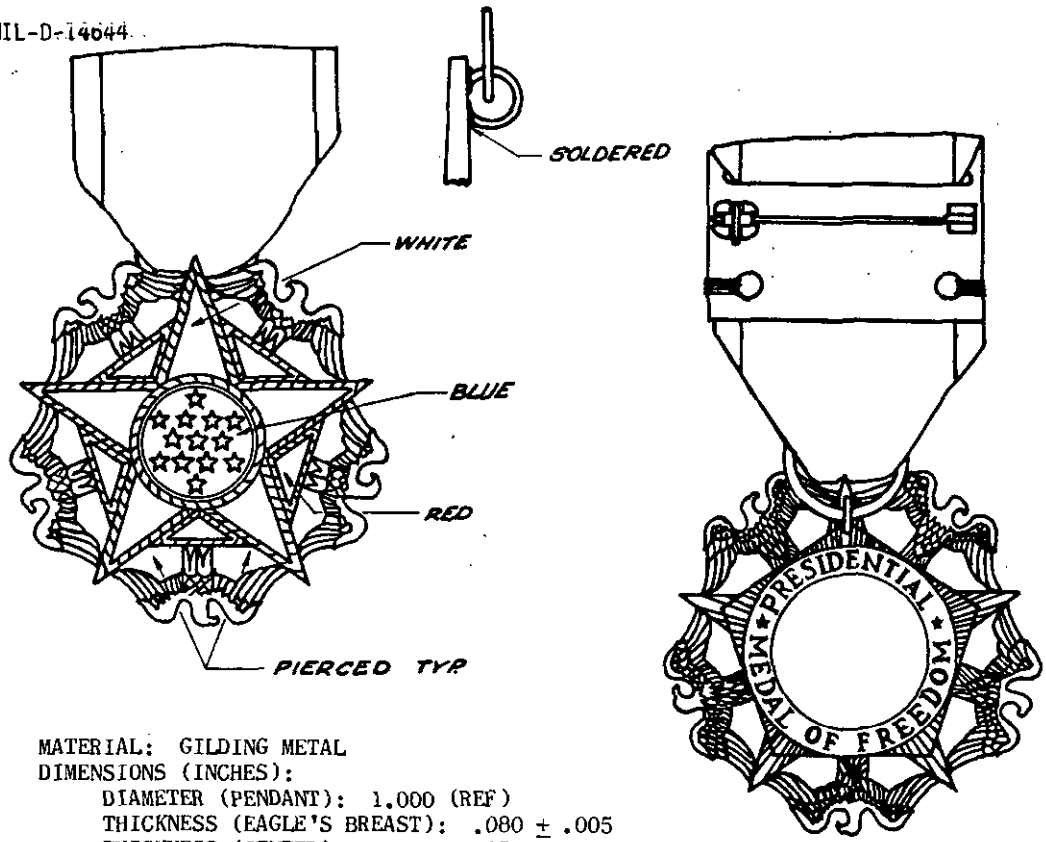

MATERIAL: GILDING METAL
DIMENSIONS (INCHES):
DIAMETER (PENDANT): 1.000 (REF)
THICKNESS (EAGLE'S BREAST): .080 ± .005
THICKNESS (CENTER): .115 ± .005
FINISH: ENAMELED, ROSE GOLD PLATED, SATIN FINISH, OBVERSE LIGHTLY POLISHED

NOTES: 1. THE PENDANT RIBBON RING SHALL BE FABRICATED FROM ANY TYPE BRASS WIRE (.032 NOMINAL DIAMETER) AND SHALL HAVE AN OUTSIDE DIAMETER OF 5/16 ± 1/64 INCH.

2. THE FINISH OF THE PENDANT RIBBON RING SHALL MATCH THE FINISH OF THE PENDANT.

3. AN ATTACHMENT RING FABRICATED FROM .032 INCH NOMINAL DIAMETER BRASS WIRE AND HAVING AN OUTSIDE DIAMETER OF 1/8 ± 1/64 INCH SHALL BE SOLDERED TO THE TOP OF THE STAR POINT ON THE REVERSE SIDE OF THE PENDANT.

4. THE PENDANT RIBBON BAR SHALL BE AS SHOWN ON FIGURE 1, EXCEPT THE OVERALL LENGTH OF THE CLIP, BAR AND PEN STEM SHALL BE ONE HALF (½) OF THE DIMENSIONS SHOWN AND THE OVERALL HEIGHT OF THE PENDANT RIBBON BAR SHALL BE 15/32 INCH.


5. WHITE ENAMEL SHALL BE BUILT UP TO FOLLOW THE CURVATURE OF THE STAR.

6. ENAMEL AREAS SHALL BE AS INDICATED. ENAMEL COLORS SHALL MATCH THE ENAMEL OF THE STANDARD SAMPLE AND THE COLOR CHIP NUMBERS LISTED BELOW:

COLOR	CHIP NUMBER
Red	1
White	28
Blue	18

F I G U R E 6 - Miniature Decoration for Component E

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

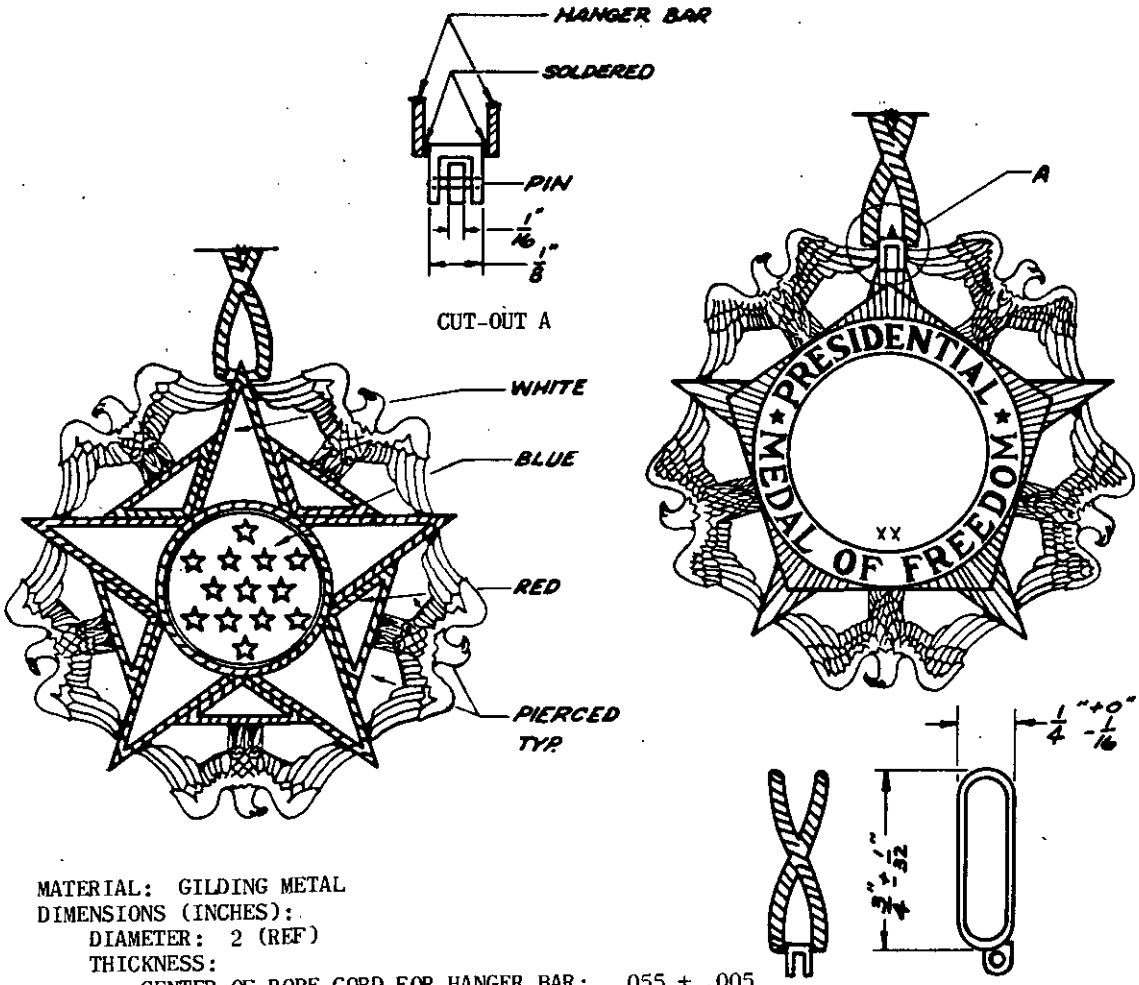

MATERIAL: GILDING METAL
DIMENSIONS (INCHES):
DIAMETER: 2 (REF)
THICKNESS:
CENTER OF ROPE CORD FOR HANGER BAR: .055 ± .005
EAGLE'S BREAST: .115, +.000, -.010
CENTER OF PENDANT: .205 ± .005
FINISH: ENAMELED, ROSE GOLD PLATED, SATIN FINISH, OBVERSE LIGHTLY POLISHED

NOTES: 1. THE "X" FORMED BY THE ROPE CORD SHALL BE CENTERED ON THE LENGTH OF THE HANGER.

2. THE SERIAL NUMBER SHALL BE ENGRAVED IN THE LOCATION SHOWN BY XX AND SHALL BE AS SPECIFIED IN THE BASIC DOCUMENT.


3. WHITE ENAMEL SHALL BE BUILT UP TO FOLLOW THE CURVATURE OF THE STAR.

4. ENAMEL AREAS SHALL BE AS INDICATED. ENAMEL COLORS SHALL MATCH THE ENAMEL OF THE STANDARD SAMPLE AND THE COLOR CHIP NUMBERS LISTED BELOW:

COLOR	CHIP NUMBER
Red	1
White	28
Blue	18

F I G U R E 7 - Pendant for Component G

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

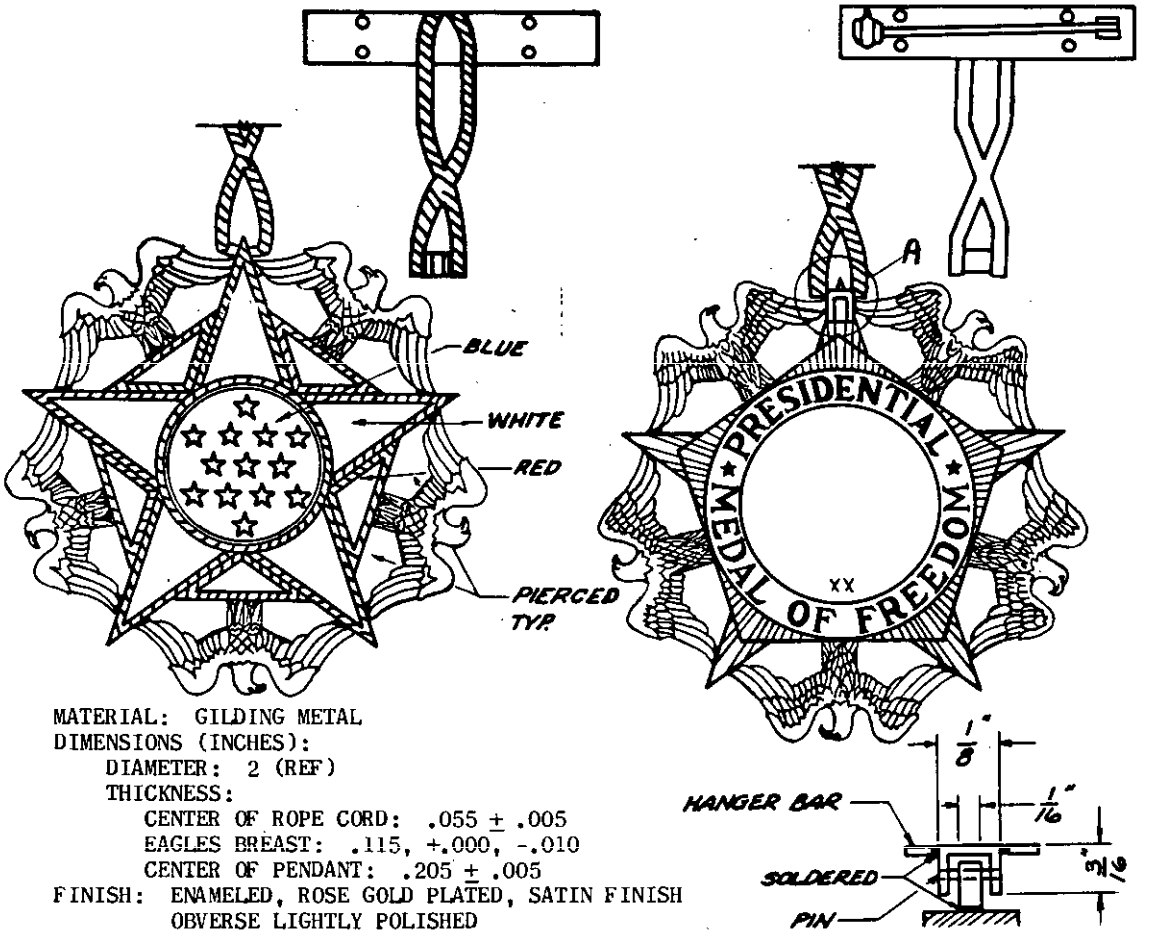

MATERIAL: GILDING METAL
DIMENSIONS (INCHES):
DIAMETER: 2 (REF)
THICKNESS:
CENTER OF ROPE CORD: .055 ± .005
EAGLES BREAST: .115, +.000, -.010
CENTER OF PENDANT: .205 ± .005
FINISH: ENAMELED, ROSE GOLD PLATED, SATIN FINISH
OBVERSE LIGHTLY POLISHED

NOTES: 1. ROPE CORD SHALL BE 1.210 (+.010, -.000) INCHES IN LENGTH (FROM PIVOT TO TOP OF ATTACHING BAR).

2. TO INSURE UNIFORMITY OF APPEARANCE THE CENTER OF THE "X" FORMED BY THE ROPE CORD SHALL BE .400 ± .005 INCH FROM THE CENTER OF THE PIVOT.

3. ROPE CORD SHALL BE CENTERED ON AND SOLDERED TO THE ATTACHMENT BAR.

4. THE ATTACHMENT BAR SHALL CONTAIN 4 HOLES AS SHOWN TO BE USED FOR SEWING THE BAR TO THE PENDANT BOW. THE HOLES SHALL BE 3/4 ± 1/64 INCH CENTER TO CENTER ACROSS THE LENGTH OF THE BAR AND 1/8 ± 1/64 INCH CENTER TO CENTER ACROSS THE WIDTH OF THE BAR.

5. THE SERIAL NUMBER SHALL BE ENGRAVED IN THE LOCATION SHOWN BY XX AND SHALL BE AS SPECIFIED IN THE BASIC DOCUMENT.


6. WHITE ENAMEL SHALL BE BUILT UP TO FOLLOW THE CURVATURE OF THE STAR.

7. ENAMEL AREAS SHALL BE AS INDICATED. ENAMEL COLORS SHALL MATCH THE ENAMEL OF THE STANDARD SAMPLE AND THE COLOR CHIP NUMBERS LISTED BELOW:


COLOR	CHIP NUMBER
Red	1
White	28
Blue	18

F I G U R E 8 - Pendant for Component H


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

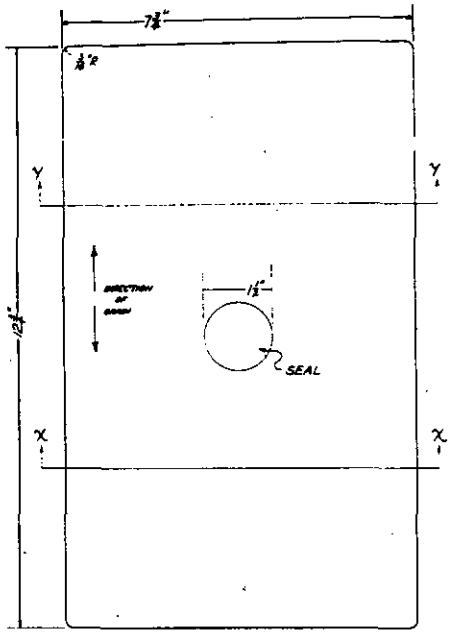


TYPE I, TOP VIEW

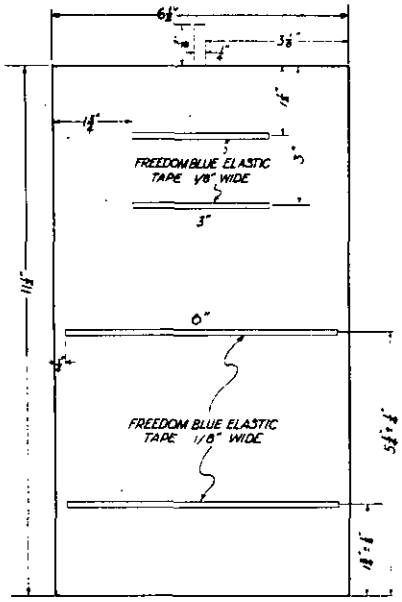


BOTTOM PAD FOR TYPE I CONTAINER

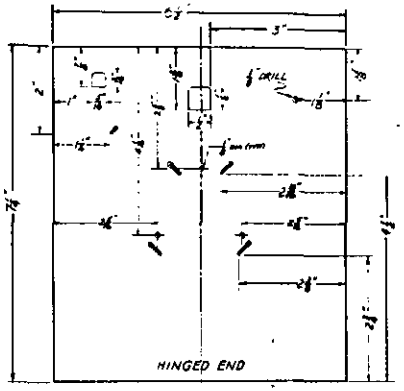


TRAY PAD FOR TYPE I CONTAINER



END VIEW



SECTION Y-Y

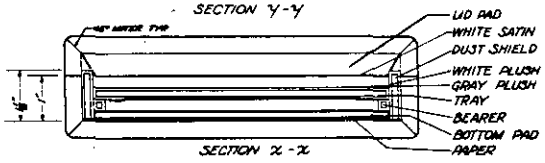

SECTION X-X


UNLESS OTHERWISE SPECIFIED FABRICATION TOLERANCES ARE:
FOR DIMENSION 1 INCH OR LESS ± 1/32 INCH
FOR DIMENSION OVER 1 INCH ± 1/16 INCH

CONTAINER DECORATION
PRESIDENTIAL MEDAL OF FREEDOM
WITH DISTINCTION
TYPE (I)


This is a miniature copy of
THE INSTITUTE OF HERALDRY
Dwg. No. 4-4-64 9 or 24 4 Oct 76
This copy is furnished for information only.
The dwg. referenced in para. 3.1 governs.

FIGURE 9


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

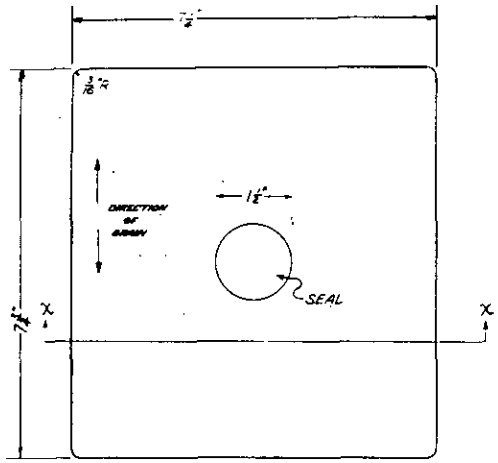


TYPE II, TOP VIEW

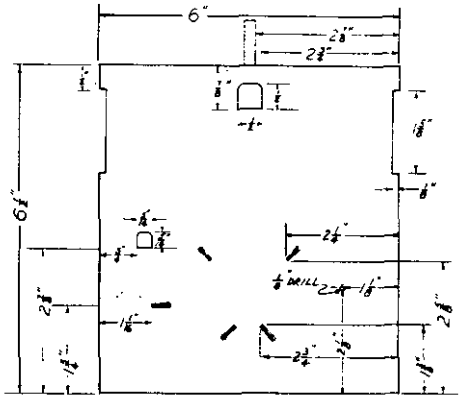


TRAY PAD FOR TYPE II STYLE 1

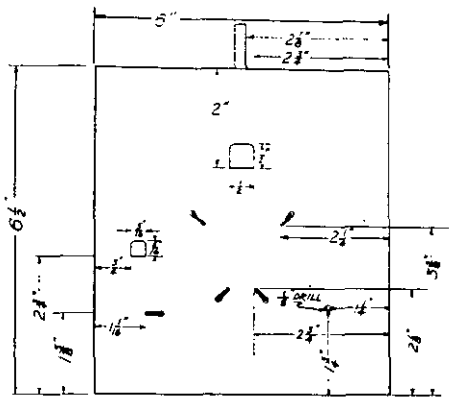

TRAY PAD FOR TYPE II STYLE 2



END VIEW

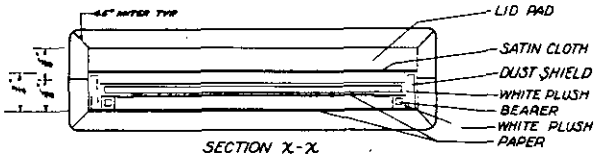

SECTION X-X

UNLESS OTHERWISE SPECIFIED FABRICATION TOLERANCES ARE:
FOR DIMENSION 1 INCH OR LESS ± 1/64 INCH
FOR DIMENSION OVER 1 INCH ± 1/32 INCH

This is a miniature copy of
THE INSTITUTE OF HERALDRY
Dwg. No. 4-4-03 Rev dtd 9 Dec 96
This copy is furnished for information only.
The dwg. referenced in para. 2.1 governs.

CONTAINER, DECORATION
PRESIDENTIAL MEDAL OF FREEDOM
TYPE (II)

FIGURE 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION MIL-D-14644 Decorations Presidential Medal of Freedom with Distinction and Presidential Medal of Freedom

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.