INCH-POUND

MIL-DTL-14644B
22 February 2021
SUPERSEDING
MIL-DTL-14644A
18 November 2019

DETAIL SPECIFICATION

DECORATION, PRESIDENTIAL MEDAL OF FREEDOM WITH DISTINCTION AND PRESIDENTIAL MEDAL OF FREEDOM

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope: This specification covers the requirements of the Presidential Medal of Freedom with Distinction and the Presidential Medal of Freedom.

1.2 Classification. The decorations covered by this specification will be classified in the following types and components (see 6.2).

Type I – Presidential Medal of Freedom with Distinction
Type II – Presidential Medal of Freedom

1.2.1 Components. Components covered by this specification will be classified in the following Components (see 6.2).

Component A – Shoulder sash with rosette and sash badge.
Component B – Breast badge.
Component C – Lapel ribbon with lapel device.
- Class 1 – Presidential Medal of Freedom with Distinction
- Class 2 – Presidential Medal of Freedom

Component D – Miniature decoration with ribbon device
- Class 1 – Presidential Medal of Freedom with Distinction
- Class 2 – Presidential Medal of Freedom

Comments, suggestions, or questions on this document should be addressed to Department of the Army, The Institute of Heraldry, Technical and Production Division, 9325 Gunston Road, Building 1466, Room S112, Fort Belvoir, VA 22060-5579 or usarmy.belvoir.hqda.mbx.tioh-webmaster. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

Component E – Service ribbon with ribbon device
Class 1 – Presidential Medal of Freedom with Distinction
Class 2 – Presidential Medal of Freedom
Component F – Pendant with neck ribbon
Component G – Type I container (Presidential Medal of Freedom with Distinction)
Component H – Type II container (Presidential Medal of Freedom)

2. APPLICABLE DOCUMENTS

2.1 General. The document listed in this section are specified in section 3, 4 or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list. Document user are cautioned that they must meet all specified requirements of documents of sections 3,4 or 5 of this specification, whether or not they are listed.

2.2 Government Documents:

2.2.1 Specifications and standards. The following specifications and standards forms a part of this specification to extent specification herein. Unless otherwise specified, the issue of these documents will be these listed in the issue of the Department of Defense Index of specifications and standards and supplement thereto, cited in the solicitation.

FEDERAL STANDARD

FED-STD-191 – Textile Test Methods

COMMERCIAL ITEM DESCRIPTION

A-A-50129 – Cloth, Cotton, Flannel, Cotton
A-A-52094 – Thread, Cotton

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-S-3951 – Service Ribbon and Service Ribbon Bars

(See supplement 1 for list of associated specification sheet)

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-1916 – DoD Preferred Methods for Acceptance of Product

(Copies of these documents are available online at https://assist.dla.mil.)

2.2.2 Other Government document, drawings and publications. The following other documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issue will be those in effect on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

DRAWING

THE INSTITUTE OF HERALDRY

B-13-5 – Attaching Devices Heraldic, Pin and Catch type (See figure 1)
B-13-12 – Attaching Device, Heraldic Prong and Clutch Type (See figure 2)
4-4-82 – Container, Decoration, Presidential Medal of Freedom with Distinction – Type I (See figure 3)
4-4-83 – Container Decoration, Presidential Medal of Freedom – Type II (See figure 4)
4-4-86 – Pendant Ribbon Bars, Regular and Miniature Assembly and Details (See figure 5)
5-1-303 – Presidential Medal of Freedom, Ribbon Components (See figure 6)

(Miniature copy of drawing B-13-5, B-13-12, 4-4-82, 4-4-83, 4-4-86, and 5-1-303 identified as figures 1, 2, 3, 4, 5 and 6 respectively are attached for information purpose only).

STANDARD CHIP SETS

THE INSTITUTE OF HERALDRY, STANDARD HARD ENAMEL COLOR CHIP SET

THE INSTITUTE OF HERALDRY, DOD STANDARD METAL FINISH CHIP SET

(Referenced Color Chips may be obtained from the procuring activity for Government procurements).

(Copies of specifications, Standards and Drawings required by the supplier in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of documents are those cited in the solicitation or contract.

ASTM INTERNATIONAL

ASTM-E498/E498M – Standard Practice for Leaks Using the Mass Spectrometer Leak Detector or Residual Gas Analyzer in the Tracer Prove Mode.
ASTM-E515 – Leaks Using Bubble Emission Techniques, Test Method for.
ASTM B568-98 Standard Test Method for Measurement of Coating Thickness by X-Ray Spectrometry
ASTM D1974/D1974M Standard Practice for Methods of Closing, Sealing, and Reinforcing Fiberboard Boxes
ASTM D2240 - Rubber Property – Durometer Hardness
ASTM-D4317 – Adhesive, Emulsion, Polyvinyl Acetate-based
ASTM-D4442-16 Standard Test Methods for Direct Moisture Content Measurement of Wood and Wood-Based Materials
ASTM-D6193 – Stitch Seam and Stitching

(These standards can be obtained from ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959 or www.astm.org.)

THE COLOR ASSOCIATION OF THE UNITED STATES
The Standard Color Reference of America, Tenth Edition
United States Army Color Card, the Official Colors for Branches, Agencies

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

(Application for copies of the aforementioned documents should be addressed to the color Association of the United States, 343 Lexington Avenue, New York, NY 10016.)

AMERICAN AND EFIRD, LLC

DoD Standard Shades for Heraldic Yarns, 2012 Edition

(Application for copies of the DoD Standard Shades for Heraldic Yarns, should be addressed to American and Efird, LLC, P.O. Box 507, Mt. Holly, NC 28130 or www.SalesRA@amefird.com).

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational service.)

2.4 Order of precedence In the event of a conflict between the text of this specification and the references cited herein, (except for associated detail specifications, specification sheet or MS standards) the text of this specification will take precedence. Nothing in this specification, however, will supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard Samples. Unless otherwise specified (see 6.2), the contracting officer will furnish a standard sample of each component required which unless otherwise specified shall be used for matching color and finish only. Other characteristics may vary in accordance with the requirements of this specification.

3.1.1 Ribbon. The contracting officer shall furnish a sample of one ribbon which shall be used for matching the shade of blue only.

3.1.2 Plush and Satin. The contracting officer shall furnish a sample of black plush and a sample of the black satin cloth to be used for matching color, texture, and quality. The black plush color shall match the color of the black satin cloth.

3.2 First article. Unless otherwise specified (see 6.2), before production is commenced a sample of each component shall be submitted or made available to the contracting officer or his authorized representative for inspection and test as specified in 4.2. The approval of the first article authorizes the commencement of production but does not relieve the contractor of responsibility for compliance with all applicable provisions of this specification. The first article shall be manufactured in the same facilities to be used for the manufacture of the product items.

3.3 Materials. Materials shall conform to the referenced specifications and to the requirements specified herein.

3.3.1 Copper Base Alloys. Copper base alloy shall be rolled polished, free from pits, scale (including red oxide), dents, nicks, cracks, scratches, segregations, and foreign inclusions that will not be removed in later processing. When tested as specified in 4.4.1, the chemical composition of the applicable copper base alloy shall be as specified in table I

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

TABLE I. Unified Numbering System and Copper content of copper base alloys.

UNS ALLOY NUMBER	ALLOY NAME	COPPER
C210	Gilding Metal	94.0%-96.0%
C220	Bronze	89.0%-91.0%
C230	Red Brass	84.0%-86.0%
C240	Low Brass	78.5%-81.5%
C268	Yellow Brass	64.0%-68.5%
C280	Free Cutting Brass	59.0%-63.0%
C745	Nickel Brass	63.0%-66.5%
C752	Nickel Silver (65-18)	63.0%-66.5%
C770	Nickel Silver (55-18)	53.5%-56.5%

1/ Copper content for the nickel silver pin only may be 53.5% to 56.5% (C770).

2/ When nickel silver is used as a base material, the nickel content shall be not less than 18% (C752).

3.4.2 Gold.

3.4.2.1 Gold alloy. When gold alloy is specified as a material of construction, the alloy shall be of the karat quality specified on the applicable specification sheet

3.4.2.3 Gold for plating. Gold for plating shall be 24 karat.

3.4.3 Silver.

3.4.3.1 Sterling silver. Sterling silver shall be not less than 92.5% pure silver.

3.4.3.1.1 Fine silver. Silver shall be no less than 99% pure silver.

3.4.3.3 Silver alloy. Silver alloy when specified as a material of construction shall be of the fineness specified on the applicable specification sheet.

3.4.3.4 Silver for plating. Silver for plating shall be not less than 99.0% pure silver.

3.4.4 Nickel for plating. Nickel for plating shall be the nickel plating normally used in commercial practice.

3.4.4.1 Nickel under plating. When nickel under plating is specified on the applicable specification sheet, nickel specified in 3.4.4 shall be used. The under plating shall not be less than 0.00025 inch. Testing shall be standard commercial. In case of a dispute, testing shall be in accordance with ASTM B568-98.

3.4.5 Solder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

3.4.5.1 Soft solder. Soft solder shall be a lead-tin alloy having a melting point of not less than 375 degrees Fahrenheit (190.55 degrees Celsius).

3.4.5.2 Hard solder. Hard solder shall be a silver colored hard solder having a melting point of not less than 1075 degrees Fahrenheit (579.44 degrees Celsius).

3.4.5.3 Gold solder. Gold solder shall be a gold colored hard solder having a melting point of not less than 1075 degrees Fahrenheit (579.44 degrees Celsius).

3.4.6 Enamel. All enamel shall be lead free.

3.4.6.1 Epoxy resin (stoning epoxy). Epoxy resin shall be a stoning epoxy pigmented to produce the required color, opacity or translucence, shade incorporating an ultraviolet inhibitor and have a shore D hardness of 77 as tested in accordance with ASTM D2240.

3.4.6.2 Hard enamel. Hard enamel shall be a glass, vitreous type enamel fused with metallic oxides to produce the required color, opacity or translucence, and shade.

3.4.6.3 Soft enamel. Soft enamel shall be a soft baking enamel pigmented to produce the required color and shade.

3.4.7 Lacquer. Lacquer shall be a semi-gloss, clear, synthetic lacquer. The use of a pigmented lacquer shall not be permitted.

3.4.8 Snap fastener. Snap fastener for the neck ribbon shall be commercial sew-on type size 2/0. The snap fastener shall be fabricated from brass and shall be nickel plated.

3.4.9 Cement. Cement for reinforcing pinked and swallow-tailed ends shall be of a nitrocellulose type which will dry clear. The solvent constituents and the viscosity must be such that when applied to one side of a ribbon completely air dried there shall be no evidence of discoloration or stain on the opposite side of the ribbon. The dried adhesive shall be waterproof and flexible. When tested as specified in 4.4.8, there shall be no evidence of cracking or peeling.

3.4.10 Thread. Thread shall conform to Type III, IC2 as specified in A-A-52094. The color shall be Freedom Blue and shall match the standard sample furnished.

3.4.11 Wood. Wood for the containers shall be selected quarter cut seasoned walnut with a Mahogany stained finish. When tested as specified in 4.4.10, the slope of the grain shall not exceed one inch in twelve inches. When tested as specified in 4.4.8, the wood, at the time of milling, shall have a moisture content of five to nine percent. The wood shall be free for knots, blemishes, cracks, shakes, and torn or raised grain or any other defect which may affect appearance or serviceability.

3.4.12 Hinge. The hinge for the container shall be a gold plated recessed piano type hinge 4 1/2 inches plus or minus 1/4 inch in length and shall be fabricated from brass and gold plated. The total width of the open hinge shall not exceed 5/8 inch. The leafs shall have a minimum thickness of 1/16 inch.

3.4.13 Catch. The catch or locking mechanism shall be a gold plated recessed push button type catch, 1-1/2 inches plus or minus 1/8 inch in overall length and shall be fabricated from brass. The striking place shall be not more than 5/16 inch in width.

3.4.14 Paper. Paper for lining the back of the pads and the interior bottom of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

container shall be 2 ply white Bristol board, 1/32 inch in thickness.

3.4.15 Service ribbon. Service ribbons shall conform to type II, style 1 of MIL-S-3951 except that the hinge joint and catch shall be built up on a platform or disk so that there is a minimum distance of 1/8 inch between the pin and the bar.

3.4.16 Tape; elastic. The elastic tape for the I container shall be any type commercial grade elastic cloth tape 1/8 inch in width and dyed Freedom Blue (see standard sample of ribbon for color match). Cut length of elastic shall be 10 percent less than the specified length.

3.4.17 Seal. The seal shall be an exact replica of the design on the Government furnished hub. The seal shall be fabricated of nickle under plated, gold plated red brass specified in 3.3.1, and shall be .090 inch thick at the center of the coat of arms plus or minus .005 inch in overall thickness. The seal shall match TIOH Metal Finish Chip #7, 24K Gold Plated, Polished Highlights.

3.4.18 Adhesive. Adhesive for wood joints shall conform to type III, of ATSM D4317.

3.4.19 Flannel. The Black Flannel cloth for the container bag shall conform to type III of A-A-50129.

3.4.20 Design. The embossed design of the decoration components and the seal shall be exact replicas of the designs of the Government furnished hubs (see 3.10), from which the contractor's working dies shall be extracted. The contractor's dies shall be tooled and polished to remove any dents, nicks, scratches, or other imperfections. Unornamented sections shall be smooth and polished.

3.5 Construction. Components shall be constructed as shown on the applicable figures or drawing and as specified herein. Where cementing is required on the reverse of the ribbon, care should be taken to ensure permeation of the filling thread without penetration to the face side of the ribbon.

3.5.1 Stamping, trimming, and piercing. Metal components shall be struck in a manner that shall insure a well defined die struck edge. The components shall be trimmed and when applicable pierce to the die struck outline of the area specified. All edges shall be clean, smooth, and free from burrs, drag, step, and rough edges. The trimming and piercing operations shall not damage or distort the design or alter the shape of the component.

3.5.2 Soldering or electronic fusion. At the option of the manufacturer joints shall be soldered or electronically fused. All soldering shall be accomplished using solder specified in 3.3.4. Soldered parts shall be completely joined without excess solder and all excess flux shall be removed. Joints shall be clean, strong, smooth, and free from burned or reduced areas. When tested as specified in 4.4.4, the soldered joint shall not separate. When tested as specified in 4.4.9, the prongs shall not separate at the fused joint.

3.5.3 Attaching device. Attaching device shall be as specified on the applicable figure.

3.5.3.1 Prong and clutch type. Prong and clutch type attaching device shall be as shown on figure 2 and as specified herein. Prongs shall be made from nickel silver specified in 3.3.1 and shall be hard soldered or fused to the back of the applicable component. The prong shall be 5/16, plus 1/64, minus 0, inch in length and shall be located as specified on the applicable figure. Clutches shall be made of any type of brass and when tested as specified in 4.4.6, the clutch shall not be removable except when the wings are depressed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

3.5.3.2 Pin and catch type. The pin and catch type attaching device shall be as shown on figure 2A and as specified herein. The pin shall be made from nickel silver specified in 3.3.1, and shall be located as shown. The pointed end of the pin stem shall be extend not less than 1/32 inch beyond the rotor of the catch and not more than 1/32 inch beyond the catch. When tested as specified in 4.4.3, the joint and safety catch shall no sign of looseness.

3.5.4 Ribbon.

3.5.4.1 Yarn. The yarn shall be continuous filament bright or semi-luster, regenerated cellulose rayon of the viscose or cup ammonium type, with not less than 20 filaments of the single yarn. The denier (Size) shall conform to table II.
3.5.4.2 Color. The individual color of the finished ribbon shall conform to cable numbers specified herein (See 6.3). The use of sulfur dyes or dyes containing elementary sulfur compound capable of oxidation to sulfuric acid is prohibited. Test for sulfur dyes shall be conducted in accordance with TM 2020 of FED-STD-191.

3.5.4.3 Matching. The color shall match the approved standard shade under natural (north sky) daylight, or artificial daylight having a color temperature of 7500 degrees Kelvin and shall be a good approximation to the standard shade under incandescent lamplight at 2800 degrees Kelvin.

3.5.4.4 Colorfastness. The rayon yarn shall show fastness to cracking, wet-dry cleaning. Water, and light properties equal to or better than the standard sample when tested as specified in 4.3.1.1. When no standard sample is available, the rayon yarn shall show not less than good fastness to crocking, wet-dry cleaning, water, and light when tested as specified in 4.3.1.1.

3.5.4.5 Wave. The ribbon shall be woven with a grosgrain weave in the ground and a 3 and 1 corkscrew weave in the selvage.

3.5.4.6 Physical requirements. The finished ribbon shall conform to the physical requirements shown in table II. When tested as specified in 4.3.1.1.

TABLE II Physical requirements

Width inches	Denier Warp (ply)	(size) Filling ply	Total warp (min)	Picks per inch (+2)	Weight linear yd (min)	Tensile Strength full with (min)
1-3/8 ± 1/16 - 0	50/2	50/2- 3	420	80 (1 thread double shot)	.28 oz.	80 lbs.
3-3/8 ± 1/16 - 0	50/2	50/2-3	1020	80 (1 thread double shot)	.68 oz.	80 lbs.
11/16 ± 1/16 - 0	50/2	50/2-3	210	80 (1 thread double shot)	.14 oz.	50 lbs.
3/16 + 1/16 - 0	50/2	50/2-3	80	80 (1 thread double shot)	.053 oz.	--

3.5.4.7 Selvage. The selvage shall be woven with 20 ends on each side of the ribbon.

3.5.4.8 Color pattern. The color patterns shall be as follow

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

3/38 Inches Ribbon

Total width inches	Width of stripes inches	Functions of stripes	Color	Cable No.	Finish	Color and cable No. of filling yarn
	1/32	End & binder	*	*		
	5/32	ground	White	67101		
3-3/8	3	ground	Freedom Blue	Standard sample	moiré	White 67101
	5/32	ground	White	67101		
	1/32	End & binder	*	*		

*Twelve warp ends on the outside edge of ribbon to be blue (Standard sample) on both sides and the balance of the edge and binder to be white Cable No. 67101

1-3/8 Inches Ribbon

Total width inches	Width of stripes inches	Functions of stripes	Color	Cable No.	Finish	Color and cable No. of filling yarn
	1/32	End & binder	White	67101		
	1/16	ground	White	67101		
1-3/8	1-3/16	ground	Freedom Blue	Standard sample	moiré	White 67101
	1/16	ground	White	67101		
	1/32	End & binder	White	67101		

11/16 Inch Ribbon

Total width inches	Width of stripes inches	Functions of stripes	Color	Cable No.	Finish	Color and cable No. of filling yarn
	1/32	End & binder	White	67101		
	1/32	ground	White	67101		
11/16	18/32	ground	Freedom Blue	Standard sample	Moiré	White 67101
	1/32	ground	White	67101		
	1/32	End & binder	White	67101		

3/16 Inch Ribbon

Total width inches	Width of stripes inches	Functions of stripes	Color	Cable No.	Finish	Color and cable No. of filling yarn
	1/32	End & binder	Freedom Blue	Standard sample		
3/16	1/8	ground	Freedom Blue	Standard sample	Plain	White 67101
	1/32	End & binder	Freedom Blue	Standard sample		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

3.5.5 Container. Containers shall be fabricated from wood specified in 3.3.10, 5/8 plus or minus 1/64 inch in thickness and shall conform to the details and dimensions shown on drawing 4-4-82 and 4-4-83 as applicable. All corner joints shall be dove tail joint and all edges (Exterior) including corners shall be rounded to a 3/16 inch radius. The seal specified in 3.3.16, shall be centered on the top of the lid and recessed so as to be flush with exterior surface of the lid. The lid and lower portion of all container shall be joined using a hinge specified in 3.3.11, and catch specified in 3.3.12. The hinge, striking plates, and outside surfaces of the lock assembly shall be recessed flush with the adjoining surfaces insuring that upon closure no gap exceeding 1/64 inch shall appear between the lid and the lower section of the container. The striking plate and catch shall be secured to the container by minimum of 2, 3/8 inch No. 1 round-headed, gold plated wood screws. The hinge shall be secured to the container by means of minimum of 4, 3/8 inch No. 2 Flat-headed gold plated wood screws. The complete interior of the container shall be stained and sealed using finish steps specified in 3.8.5.2, prior to insertion of the lid pad and dust shield. The lower section of each container shall have a dust shield securely cemented to and completely covering each interior wall and the interior bottom shall be covered with white paper specified in 3.3.13. The dust shield shall be fabricated in one piece with the two ends joined in one corner at the hinged end of the container. Dust shields and bearers shall be fabricated from fiberboard 1/8 inch in thickness, cut to the required length and width, and completely covered with black plush. The seamed side of the dust shield and bearer shall cemented to the wall. The bottom pad for the type I container shall be fabricated using 14 ply Bristol board. All other pads shall be fabricated from 1/8 inch fiberboard. The face, edges, and one inch along each edge of the reverse side of all pads shall be covered with black plush. After the wire loops, tab attachments, lift tabs, and when applicable, elastic tapes have been securely anchored, the reverse side of the pad shall be covered with paper specified in 3.3.13. The pad attachments (tabs) shall be blanked from 26 gauge steel and covered with black plush. The wire loops shall be formed from gold color wire 1/32 inch in diameter and shall have exposed length of 1/2 inch plus or minus 1/8 inch for type II containers and 5/8 inch plus 1/8, minus 0 inch for type I containers. The wire may be gold plated or covered with gold thread at the option of the manufacturer. The color of the wire shall match the color of the wire in the standard sample. A 3/64 inch nominal diameter hole located as shown on the applicable drawing shall be drilled thru the tray pad of the type I container and the pads for the type II containers. These holes shall be utilized in placing the lapel ribbon in the container. The inner surface of the hinge shall be covered with a piece of black satin cloth which shall be anchored beneath the lid pad in the lid section of the container and under the dust shield on the lower section of the container.

3.6. Detail components. Unless otherwise specified when a prong and clutch is specified, the prong and flat ball type clutch specified in drawing B-13-12 shall be utilized.

3.6.1 Component A (Shoulder sash). The shoulder sash shall be fabricated from 3-3/8 inches wide ribbon specified in 3.5.4, and shall conform to the details and dimension shown in drawing 5-1-303. The sashes may be made from either one piece of ribbon 68 plus or minus 1/2 inch in length or two pieces 34 plus or minus 1/4 inch in length. The Midpoint of the 68 inches long ribbon or two ends of the 34 inches long ribbon shall be folded to an angle of 10 plus or minus 1/2 degrees from filling direction and machine stitched using stitch type 304 and 18 plus or minus 2 stitches to the inch. This stitching shall form the shoulder end of the sash with the front and back ribbons of equal length. All other stitching shall be hand stitching with 8 to 10 stitches to the inch. The free ends of the sash shall be coated on the reverse side of the ribbon with cement specified in 3.3.8, for a distance of 3/4 plus or minus q/8 inch. When the cement fully dried, the ends shall be cut as shown. At a point 6 inches from each ribbon end, a mark shall be centered and the ribbon shall be taken in as shown. The center mark on the front ribbon shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

superimposed on the center mark on the back ribbon, the ribbons adjusted so that to cross at an angle of 50 to 55 degrees and stitched using thread specified in 3.3.9. The rosette specified in 3.6.1.1, shall then be centered over the center mark and stitched firmly to the ribbon using thread specified in 3.3.9.

3.6.1.1 Rosette. The rosette shall be fabricated from not less than 16 lineal inches of 3-3/8 inches wide ribbon specified in 3.5.4, cut to 1-3/8 inches in width, including one selvage edge. The selvage of the ribbon shall be on the outside of the rosette. The rosette shall be 3 inches +1/4, - 0 in diameter, evenly folded and ruffled and stitched to a reinforcement of buckram 2-3/4 inches in diameter (a minimum of 14 and a maximum of 20 folds shall be equally spaced around the rosette). Care should be taken to insure the rosette is round and not oval.
3.6.1.2 Sash badge. The sash badge shall conform to the details and dimension shown on figure 10. The sash badge shall be centered on the rosette.

3.6.2 Component B (Breast badge). The breast badge shall conform to the details and dimension shown on figure 9.

3.6.3 Component C (Lapel ribbon with device). The class 1 lapel ribbon with lapel device (-1 on figure 11) shall be used with the type I decoration. The class 2 lapel ribbon with lapel device (-2 on figure 11) shall be used with type II, style 1 decoration.

3.6.3.1 Lapel ribbon. Lapel ribbons shall be fabricated of 3/16 inch wide ribbon specified in 3.5.4, and shall be as shown in drawing 5-1-303. The lapel ribbon shall be 3 inches in length and one end tapered to 1/16 inch and the other end reinforced with one inch by 1/8 inch reinforcement patch sewn to the reverse side of the ribbon. The patch shall be made from durable fabric used in army uniforms and shall be dark in color. A lapel device specified in 3.6.3.2, shall be centered on the left end of the lapel ribbon and cemented to the lapel ribbon using cement specified in 3.3.8.

3.6.3.2 Lapel devices. The lapel devices shall be as shown on figure 11. The devices for class 1 and class 2 lapel ribbons are identical except for base material and finish.

3.6.4 Lapel device. Lapel device shall be as specified in 3.6.3.2.

3.6.5 Component D (Miniature decoration with device). The class 1 miniature decoration with ribbon device shall be used with type I decoration and the class 2 miniature decoration with ribbon device shall be used with type II decoration.

3.6.5.1 Miniature decoration. The miniature decoration shall be as shown on figure 8. The pendant ribbon shall be fabricated from 11/16 inch wide ribbon specified in 3.5.4. The pendant ribbon length shall be adjusted so that overall length of the decoration shall be 2-1/4 inches plus or minus 1/16 inch. A ribbon device specified in 3.6.5.2, shall be centered on the pendant ribbon.

3.6.5.2 Ribbon device. The ribbon device shall be as specified in 3.6.3.2, except a staple type prong as specified in figure 5, shall be the attaching device.

3.6.6 Component E (Service ribbon with ribbon device). The class 1 service ribbon with ribbon device (-3 on figure 11) shall be used with type I decoration. The class 2 service ribbon with ribbon device (-4 on figure 11) shall be used with type II, style1 and 2 decorations.

3.6.6.1 Service ribbon. The service ribbon shall be specified in 3.3.14, using 1-3/8 inches wide ribbon specified in 3.5.4. A ribbon device specified in 3.6.6.2, shall be centered on the

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

service ribbon.

3.6.6.2 Ribbon device. The ribbon device shall be specified I 3.6.3.2, except a staple type prong specified on figure 5 shall be used as the attaching device.

3.6.7 Component F (Pendant with neck ribbon). The pendant with neck ribbon shall be used the type II, style 1 decoration.

3.6.7.1 Pendant. The pendant of component F shall be as shown on figure 7.

3.6.7.2 Neck ribbon. The neck ribbon shall be fabricated from 1-3/8 inches wide ribbon (without wired edges) specified in 3.5.4, and shall be as shown on drawing 5-1-303. Both ends are to be narrowed to 11/16 inch by turning edges to butt against each other and overcast stitching as shown using 8 to 10 stitches to the inch. Three male snap fastener shall be placed at either end, with three female snap fastener at the opposite end and side, as shown. The snap fasteners shall be as specified in 3.3.7.

3.6.8 Component G (Type I container). The container for the type I decoration shall conform to the details and dimensions shown on drawing 4-4-82. The lid shall be completely filled with a low density polyurethane pad 1/2 inch thick covered by black satin cloth. The edges of the pad shall be beveled on an angle of 30 degrees to allow clearance for the dust shield in the lower section of the container upon closure. The pad shall be sufficiently compressible to permit closure of the lid over outstanding components to be attached to the hinged tray in the lower section of the container. The lower section of the container shall have two levels. The upper level shall be formed by the hinged tray supported by bearers. The bearer shall be 7 inches in length and 1/4 inch in height and shall be securely cemented to the dust shield. The top edge of the bearer shall be 3/8 inch from the bottom of the container at the hinged end of the tray and 3/4 inch from the bottom of the container at the free end of the tray. The cloth hinge of the tray shall allow the tray to rotate thru an arc of 90 degrees assuring complete access to the lower level of the container. The bottom pad shall be inserted under the tray bearers and shall rest directly on the interior bottom of the container. The bottom pad shall have a tab made from black satin cloth 1/4 inch wide and 7/8 inch of free length. The tab shall be located as shown.

3.6.9 Component H (type II container). The container for type II decoration shall conform to the details and dimensions shown on drawing 84-4-83. The lid shall be completely filled with a low density polyurethane pad 1/2 inch thick and covered by black satin cloth. The lower section of the container shall have bearers 1/4 inch high running the length of the container and securely cemented to the dust shield and the bottom of the container. The pad shall rest on these bearers. Each pad shall have tab made from satin cloth 3/8 inch wide and 7/8 inch free length located at the hinged end of the container.

3.7 Assembly. Each decoration shall consist of components herein and assembled in the specified container.

3.7.1 Type I decoration. The type I decoration (Presidential Medal of Freedom with Distinction) shall be made up of the following components:

Component A (Shoulder sash with sash badge).
Component B (Breast Badge).
Component C, class 1 (Lapel ribbon with device).
Component D, class 1 (Miniature decoration with device).
Component E, class 1 (Service ribbon with device).
Component G, class 1 (Type I container).

clutch fasteners shall be placed in a plastic or wax paper bag and placed under the tray.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

3.7.2 Type II decoration. The type II decoration (presidential Medal of Freedom) shall be made up of the following components:

Component F (Pendant with neck ribbon).
Component D, class 2 (Miniature decoration with device).
Component C, class 2 (Lapel ribbon with device).
Component E, class 2 (Service ribbon with device).
Component H, class 2 (Type II, style 1 container).

3.8 Finish. Components shall be finished as specified on the applicable figure and as specified herein. The finishes of the components shall match the color and finish of the applicable standard sample (See 3.1) or applicable approved sample (See 3.2). When plating is specified the entire pendant, badge, or device except for the attaching device shall be plated. At the option of the contractor gold plated items may also lacquered.

3.8.1 Cutting down. When necessary to remove nicks, scratches, inequalities, pores, or other blemishes, the items may be cut down by means of grease or oil buffing, provided the item is not cut down to the extent that any of the design is reduced or obliterated.

3.8.2 Gold plating. Prior to plating, the item shall be clean of matter that may affect the gold plating. Gold specified in 3.3.2 shall be used of gold plating. The plating shall be nonporous and continuous over the plated surface. There shall be no cut-through, peeled, or blistered plating. The use of white metals as an undercoating for gold will not permitted. No visible chemical reaction, such as evolution of gases shall appear when tested as specified in 4.4.2. Gold plated items may be lacquered at the option of the manufacturer.

3.8.3 Enameling. Unless otherwise specified on the applicable specification sheet, all enameling shall be accomplished using epoxy specified in 3.4.6.1 or hard enamel specified 3.4.6.2. Epoxy or enamel shall be applied so as to be uniform in color, free from bubbles, foreign inclusions, cracking, crazing, or other defects which might affect appearance. There shall be no over-running of epoxy or enamel.

3.8.3.1 Colors. Epoxy or enamel colors shall match the shades of The Institute of Heraldry hard enamel color chips specified on the applicable component Figures 8 thru 10.

3.8.4 Lacquering. When lacquering is required, the entire device, excluding the attaching device, and the seal shall be completely covered by lacquer specified in 3.3.6. The dry lacquer film shall be continuous, level, and adherent, and free from lint, dust, and other inclusions. There shall be no change on the appearance of the lacquered surface except for slight yellowing of the high-lights and not more than two spots, each less than 1/16 inch largest dimensions, when tested as specified in 4.4.5.1. The test specified in 4.4.5.1 does not apply to gold plated items. When tested as specified in 4.4.5.2, the tissue paper shall not adhere to the lacquered surface.

3.8.5 Container.

3.8.5.1 Exterior. The finish of the container shall match the finish of the standard sample. The finish for the outside and the rims of the container may be obtained by the following procedure:

(1) Stain to uniform color (Mahogany).
(2) Wash coat.
(3) Scuff sand.
(4) Apply filler.
(5) Remove excess filler.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

(6) Dry completely.
(7) Apply lacquer sealer.
(8) Dry completely
(9) Sand lightly.
(10) Apply coat of dull flat (Furniture) lacquer.
(11) Dry completely.
(12) Apply second coat of dull flat (Furniture) lacquer.
(13) Dry completely.
(14) Wax and rub.

3.9 Marking for identification. Component B (Breast Badge), the pendant of component F (pendant with neck ribbon) shall be engraved with a serial number as specified in the contract or order (See 6.2). All engraving shall be accomplished by panographing using condensed type face roman letters and numerals in the sizes specified herein.

3.9.1 Component B (Breast badge). The reverse surface of the breast badge shall engraved with the words “PRESIDENTIAL MEDAL OF FREEDOM” using 3/16 inch high letters. The location of the engraving shall be as shown on figure 9. The serial number shall be preceded by the letter “D” and a hyphen (-). Both the serial number and the letter “D” shall engraved using 3/32 inch high letters and numerals. The 3/16 inch high lettering shall be .015 inch, plus or minus .005, - 0 inch deep and 3/32 inch high letters and numerals shall .005 inch, plus or minus.005, - 0 inch deep.

3.9.2 Pendant for component F (Pendant with neck ribbon). The serial number shall be engraved in the location shown on figure 7. The engraved number shall be 3/64 inch high and shall be minimum of .005 inch deep.

3.9.3 Engraving of the recipient’s name. When specified (See 6.2), the recipient’s name shall be engraved on the decorations using condensed type face roman letters. The size and depth of the letter shall be as specified below: The recipient’s name shall be centered in the unembossed areas.

	Size of letters		Depth of lettering
	Upper Case	Lower Case	
Type I	3/16 inch	1/8 inch	.015 + .005 - .000
Type II	1/8 inch	3/32 inch	.005 + .005 - .000

3.10 Government loaned property.

3.10.1 Hubs. Hubs loaned by the Government shall be used for making the contractor’s working dies necessary for one contract or order.

3.10.2 Standard sample. Standard samples loaned by the Government shall be used for matching color and finish only and upon approval of the first article the standard sample shall be returned immediately to the contracting officer.

3.11 Workmanship. Decorations or components of decorations shall be clean, well made

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

and shall meet the acceptable quality levels established by this specification.

4. VERIFICATION

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserve the right to perform any inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and service conform to prescribed requirements.
4.2 First article inspection. When a first article is required, the first article shall be examined in accordance with classification of defects listed in paragraph 4.3.2.1. The first article shall be tested in accordance with paragraph 4.3.3.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be in accordance with standard MIL-STD-1916, except where otherwise indicated.

4.3.1 Inspection of materials.

4.3.1.1 Testing of materials. In addition to the quality assurance provisions of the subsidiary specifications and drawings, inspection shall be performed on materials listed in table III for the test characteristics shown therein. The inspection level shall S-1 and the acceptable quality level (AQL) shall be 2.5 defects per hundred units for requirements which are applicable to the individual unit.

TABLE III Testing of Materials.

Component and lot Size expressed in terms of	Characteristics	Rqmt para	Test Method*	Rqmt Apply To lot Avg		Number of determinations per min	Results reported as	Sample unit
				Individual unit	Lot average			
Cooper basealloy, as applicable (1pound)	Chemical Composition	3.3.1	4.4.1	-	X	2 composite	Nearest 0.1% of each element	One 4 inch by 4 inch piece or Equivalent for Each alloy
Yarn (1 pound)	Denier	3.5.4.6	Std coml	X	-	1	To the nearest whole No.	One tube, cone Or spool
	Ply	3.5.4.6	Visual	X	-	1	Pass or fail	
	Colorfastness: Croking	3.5.4.4	4650	X	-	1	Satisfactory or unsatifactury or excellent,good, fair, or poor	
	Wet-dry cleaning	3.5.4.4	4622	X	-	1		
	Water	3.5.4.4	4630	X	-	1		
	Light	3.5.4.4	4660	X	-	1		
	Texture: Wrap	Table II	5050	X	-	5	Average of 5 determine to nearest whole No.	3 continuous yards
Ribbon								

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

(1 yard)	Filling	Table II	5050	X	-	5	Average of 5 determine to nearest whole No.	
	Weight	Table II	5040	X	-	1	To nearest 0.01 oz.	
	Tensile strength	Table II	5100	X	-	5	Average of 5 determine to nearest whole No.	
	Weave	3.5.4.5	Std Coml. 2020	X	-	1	Pass or fail	
	Presence of sulfur dyes	3.5.4.2		X	-	1	Pass or fail	
	Color arragement width of individual stripes	3.5.4.8	Visual	X	-	1	Pass or fail	
	Moisture	3.5.4.8	4.4.8	X	-	1	Average nearest 0.1%	
Wood board ft.	Slope of grain	3.3.10	4.4.10	X	-	3	Pass or fail	1 board at the Time of cutting 1 board
		3.3.10				1		

* Test methods specified shall be in accordance with FED-STD-191, when applicable.

4.3.1.2 Certification of compliance.

Component	Characteristic	Rqm't para
Solder	Material identification	3.3.4
Cement	Material identification	3.3.8
Yarn*	Fiber Identification	3.5.4.1
	Brightness	3.5.4.1
	Number of filaments	3.5.4.1
	Presence of sulfur	3.5.4.2
Pin	Material identification	3.3.1
Gold plating	Material identification and karat	3.3.2
Snap fastener	Fineness	3.3.3
Hinge, catch & striking plate	Material identification, finish, type and size	3.3.7
	Plating identification	3.3.11 & 3.3.12
Paper		
Wire for 1-3/8 ribbon	Material identification, ply, and thickness	3.3.13
Pad attachment	Material identification and diameter	3.5.4.8
Rosette reinforcement	Material identification and gauge	3.5.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

Lid pad	Shall be buckram Material identification and thickness	3.6.1.1 3.6.9 & 3.6.10

* Certification of compliance will be accepted only for the characteristics indicated. Testing for the other cited characteristics shall be performed in accordance with paragraph 4.3.1.1

4.3.2.1 Visual examination of end item. The defect found during examination shall be classified in accordance with 4.3.2.1.1 and 4.3.2.1.2. The lots shall be inspected in accordance with 4.3.2.1.3. The unit of the product for these examinations shall be one boxed decoration of each type and style or a finished component, as applicable
4.3.2.1.1 Examination of insignia for defect in finish, design, material, construction, workmanship and marking. Defects designated by an asterisk (*) shall be classified as major when seriously affecting serviceability or appearance and minor when affecting appearance or serviceability but not seriously.

Examine	Defect	CLASSIFICATION Major (*)	Minor
Color and finish Of metal components	Does not match the standard or approved sample As follows:		
	Finish has not been sufficiently relieved or has been Excessively relieved……..		*
	Not highlighted to the same extent as the approved Samples; or it is excessively highlighted……		*
	Background not finished as specified……	X	
	Hanger bar is not finished the same as the pendant To which they are attached……...		*
	Pit, scale, nick, scratch, pinhole, crack, rupture, Segregation, foreign matter, or other blemish……		*
	Buff, drag, blushed, or cloudy finish……		*
	Surface not clean or discolored, i.e., spot, stain, or Speck……		*
	Not plated or plating is not the specified type……...	X	
	Plating not continuous, cut-through, or porous……	X	
	Plating surface is not smooth or not adherent, i.e., is Flaking, peeling, or blistered……..	X	
Color and finish Of enameled Surfaces (As Applicable)	Color or shade of enamel does not compare favorably with standard or approved sample……	X	
	Discoloration, such as spot, stain, or speck……..		*
	Not enameled……	X	
	Enamel is not type specified……	X	
	Enamel is cracked, chipped, or crazed……		*
	Bubble, pit, lump, foreign inclusion, hole, lap, overrun, Or skip in enamel……..		*
	Fishscale, copperheads burn offs, scale, or specking In enamel……		*
	Skimming, darkened, burned edges, or lack of gloss In enamel……..		*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

	Enamel not stoned and polished level with the dikes, When applicable, i.e., contains high or low spots…….		*
	Enamel not convex within dikes, or contains high or low Spots, when applicable……..		*
	Any enamel not contained within prescribed outline of Design……...		*
Color and	Does not match standard or approved sample……..		*
Finish of	Stained or discolored…….		*
Container	Light colored edge……..		*
Exterior surface	Foreign matter embedded, gouge, scratch, scuff, chipout, Sanding marks, or other imperfections……		*
Interior Surface	Plush, elastic tape, or satin does not match standard Sample for color, finish, or texture…….		*
	Visible imperfection in plush, elastic tape, or satin……..		*
	Wood not stained as specified…….		*
	Plush, elastic tape, or satin stained, discolored, or dirty…		*
	Plush, elastic tape, or satin torn, cut, frayed, contains Hole or otherwise damaged……..		*
Lacquering	Not lacquered, when required……	**X**	
(As Applicable**)**	Lacquer forms noticeable runs……..		*
	Not free from lint, dust or other inclusions……		*
	Lacquer coating is not smooth or is not adherent, e.g., is Flaking, blistering, or peeling…….		*
Design	Any operation not in accordance with the specified Requirements……..	**X**	
	Any detail altered, i.e., does not conform to Government Hub or drawing…….	**X**	
	Warp, twist, or distortion producing irregular surface Contour or outline…….		*
	Detail struck over, resulting in a double impression……	**X**	
Quality of metal	Surface is pitted, porous, crystalline, open grained, Or otherwise impaired……	**X**	
Quality of wood	Not walnut……..	**X**	
	Not quarter cut……		*
	Shake, check, fracture, split, break, loosened grain, or Splinter……..	**X**	
	Torn or raised grain, knot, mineral streak, decay, worn Hole, or other imperfection……		*
Construction and Workmanship of	any component (Including attaching device) missing, bent, twisted, broken, deformed, or otherwise impaired…		*
Metal components	not connected or joined as specified, or operation is Poorly accomplished……	**X**	
	Any mutilation, such as machine mark, dig, dent, or Scratch……		*
	Pin hole, crack, or rupture…….		*
	Not trimmed to the die-struck edge…….		*
	Dikes are distorted…….		*
	Any edge not clean and smooth, e.g., burr, drag, step or Roughness……		*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

	Design or shape is damaged, distorted, or altered by Piercing operation……	*		
	Component parts are not completely joined by solder (When Required)……	*		
	Metal burned or reduced in soldering or acid cleaning…….	*		
	Solder spatter visible on front or edge of component……..	*		
	Solder spatter on back of component exceeding 1/16 inch In greatest dimension……..	*		
	Fastening device is not as specified……	X		
	Fastening device not positioned as specified out of Alignment, or components are off-center by 1/8 inch Or more……..	X		
	Point of the pin extents less than 1/32 inch beyond rotor Of the safety catch……	X		
	Point of the pin protrudes more than 1/32 inch beyond the Safety catch…….			X
	Pin blunted, affecting use……		*	
	Pin will not engage the catch or rotor will not operate…….	X		
	Attaching device (Other than pin and safety catch) is Defective, e. g., will not operate as intended……..		*	
Construction	Corner joints not mitered……..			X
And workm	Exterior edges (Including corners) not rounded to 3/16			
anship of	inch radius……		*	
container	Direction of grain not in the direction as specified……	X		
	Pad not covered as specified……..	X		
	Covered or bottom warped……..		*	
	Covered or bottom out of alignment……..		*	
	Bearer not covered as specified…….	X		
	Cover cannot be closed……	X		
	Catch, hinge, or seal no countersunk or not correctly Positioned……	X		
	Hinge or catch binds or does not function properly or Smoothly…….....		*	
	Any component missing, damaged, or otherwise impaired….		*	
	Joint not type specified……..	X		
	Dust shield does not cover or is not securely cemented to Interior wall…….		*	
	Wood defect filled with plastic wood or other filler material….		*	
	Hinge not covered as specified……	X		
	Open, loose, or unsound glued joint…….		*	
Materials	Any component not fabricated of the specified material (Unless otherwise indicated herein)……	X		
Inscription				
And marking	Missing, incorrect, illegible or poor legibility. Misspelled, Misplaced, or is not applied in the specified manner……	X		
	Non-uniformity of depth in engraved lettering……	X		
	Serial number not as specified……..	X		
	No serial number or incorrect number……	X		
Quality of	Material soiled or stain……	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

Ribbon material	Color or color pattern is not specified……..	X		
And attachment	Shade does not compare favorably with the standard or Approved sample……..		*	
	Finish of ribbon not specified (e. g., is not moiré when Required)……	X		
	Material imperfection such as end out, broken or missing Yarn, tear, cut, hole, float, or defective selvage……..		*	
	Any ribbon component not formed as specified or not shown On drawing……		*	
	Smash……	X		
	Pinked or swallow-tailed end of ribbon no cemented when Required……..	X		
	Coarse end, knot, slub, or uneven texture…….		*	
	Filling yarn showing between ground and binder……		*	
	End of ribbon cemented, but not to specified extent……...			X
	Ribbon not clinched to bar (When required) e. g., clip slips Laterally under slight pressure……..	X		
	Evidence of stain or discoloration of the face side of the Ribbon……		*	
	Distorted drape on miniature ribbon……		*	
	Ribbon is not attached to ribbon bar in the specified manner.	X		
	Does not contain wired edge (When required)……..	X		
	Snap fasteners (When required) missing, misplaced, or Damaged……	X		
	Snap fastener not finished as specified……..		*	
	Snap fastener is not securely attached……		*	
	Clip or ribbon bar metal is exposed more than 1/64 inch, but Not more than 1/32 inch……..			X
Sewing (As	Not sewn or not tacked where required……..	X		
Applicable)	Sewing or tacking is not neatly or securely accomplished……		*	
	Color of tacking thread does not match color or section of The ribbon sewn……		*	
	Tacking not knotted in location required…….			X
	Color of machine thread does not match color of tacking Thread……..			X
	Broken stitch……..			X
Assembly	Not symmetrical…….		*	
	Not accomplished as specified……		*	
	Any component missing……	X		
	Component does not fit within container as required……..		*	

4.3.2.1.2. Examination of the flag for defects in dimensions. Any dimension not within the specified tolerance shall be classified a defect.

4.3.2.1.3. Inspection levels and acceptable quality levels (AQL's). The inspection levels and the AQL's expressed in defects per hundred units shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

	Inspection Level	AQL major	AQL total
For defects applicable to 4.3.2.1.1	II	0.10	10.0
For defects applicable to 4.3.2.1.2	S-3	(one class)	2.5

4.3.3 Testing of end item. Testing of the completely fabricated decorations shall be performed in accordance with table IV for the characteristics shown therein. The sample unit shall be one gold plated, one lacquered, and one enameled decoration as applicable. The inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units.

TABLE IV Testing of the end item

Characteristic	Requirement paragraph	Test Method	Requirement Applicable to		Number determinations Per sample unit	Results reported as
			Individual unit	Lot average		
Test for gold plating	3.8.2	4.4.2	X	-	3	Pass or fail
Test for pin, joints, and Safety catches	3.5.3.2	4.4.3	X	-	1	Pass or fail
Test for solder joints	3.5.2	4.4.4	X	-	1	Pass or fail
Test for lacquer						
Liver of sulfur test	3.8.4	4.4.5.1	X	-	1	Pass or fail
Tackiness test	3.8.4	4.4.5.2	X	-	1	Pass or fail
Test for clutches	3.5.3.1	4.4.6	X	-	1	Pass or fail
Test for cement	3.3.8	4.4.8	X	-	1	Pass or fail
Test for fused joints	3.5.2	4.4.9	X	-	1	Pass or fail

4.3.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing, and marking requirements of section 5, of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

Examine	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location Sequence or method of application.
Materials	Any component missing, any component damage, affecting Serviceability.
Workmanship	Inadequate application of components such as incomplete Closure of case liner, container flaps, loose strapping Inadequate stapling. Bulging or distortion of containers.
Weight or content	Number of intermediate packages is more or less than Required; gross or net weight exceeds requirement.

4.4 Tests.

4.4.1 Chemical composition test. Chemical composition shall be determine in accordance with the test method III of ASTM E498/427/515. Results shall be evaluated to determine compliance with the requirements specified in 3.3.1.

4.4.2 Test for gold plating. Nickel under plating. When nickel under plating is specified on the applicable specification sheet, nickel specified in 3.4.4 shall be used. The under plating shall not be less than 0.00025 inch as specified in 3.4.5. Testing shall be standard commercial. In case of a dispute, testing shall be in accordance with ASTM B568-98.

4.4.3 Test for pin, joints, and ball type safety catches. Safety catches and pins shall be opened and closed ten times, after which, the pins and joints, and safety catches shall be inspected to be determine compliance with the requirements specified in 3.5.3.2.

4.4.4 Test for soldered joints. Items to be tested shall be placed in an oven maintained at 1065 degrees F. for less than 15 minutes. While at the specified temperature, items shall be lifted by the smaller part and the soldered joint shall be inspected to determine compliance with the requirements specified in 3.5.2.

4.4.5 Test for lacquer.

4.4.5.1 Liver sulfur test. Items to be tested shall be immersed in 2 percent by weight CP liver of sulfur (Sulfurated Potash) water solution, at a temperature of 100 degree F. (Plus or minus 10 degrees F.), for a period of three minutes. The items shall then remove and raised in warm, then cold, then hot water, after which they shall be wiped gently with absorbent cellulose material or whirled to remove residual moisture, allowed to air dry room temperature for a period of one hour. After this hour they shall be inspected to determine compliance with the requirements specified in 3.8.4.

4.4.5.2 Tackiness test. At room temperature (60 to 80 degrees F.), press a piece of tissue paper against the finished lacquered surface for 15 seconds, using any pressure capable of being exerted between thumb and two fingers, after which the pressure shall be released and the item inspected to determine compliance with the requirements specified in 3.8.4.

4.4.6 Test for clutches. The clutches shall be removed and replaced on the prong ten times, after which an attempt shall be made to remove the clutch without depressing the release

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

wings. The clutch shall then be examined to determine compliance with the requirements of 3.5.3.1.

4.4.5.3 Test for shore hardness of epoxy resin. Shore hardness shall be determined in accordance with ASTM-D2240

4.4.7 Moisture content of wood. Moisture content of the wood shall be determine in accordance with the requirements with specification ASTM-D4442-16.

4.4.8 Test for cement. After the cemented surface has dried, the cement covered ribbon shall be slowly bent 180 degrees around a 1/8 inch in diameter rod. The cement shall then be examine to determine compliance with 3.3.8. The test shall be performed at ambient temperatures.

4.4.9 Test for fused joints. Fused prongs shall be bent back and forth through an angle of 90 degrees (45 degrees on each side of the vertical) until the prong breaks. The fused joint shall then be inspected to determine compliance with 3.5.2. A bending tool in the form of 45 degrees template may be used in the test.

4.4.10 Slope of wood grain. The slope of grain may be determine by combining the grain direction of two adjacent faces of a square or rectangular piece. When one of these faces is straight grained, the true slope of grain is shown on the other face. When there is a slope on both faces, the true or combined slope is greater than the slope on either face. Slope of grain shall be determine with Teco Slope of Grain Detector supplied by the Timber Engineering Co., Inc., Washington, D.C. to determine compliance with 3.3.10.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1. Intended use. The decorations covered by this specification are intended to be awarded by the President of the United States to selected individuals to provide tangible evidence of public recognition for especially meritorious contribution to security or national interests of the United States, to world peace or cultural or other significant public or private endeavors.

6.2 Acquisition requirements. Procurement documents should specify the following:

(a) Title, date and number of this specification.
(b) Components required (See 1.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

(c) When a standard sample will not be furnished (See 3.1).
(d) When first article is required (See 3.2).
(e) Serial number for breast badge and pendants (See 3.9).
(f) When specified, engrave recipients name (See 3.9.3).
(g) Packaging Requirements (See 5.1).


6.2.1. Government - loaned property. The contracting officer should arrange to loan the property listed in 3.10.1.

6.3 Subject term (key word) listing.

Assembly	Government Loan Property
Construction	Materials
Design	Standard Samples
Detail component	Workmanship
Finish	

6.4 CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

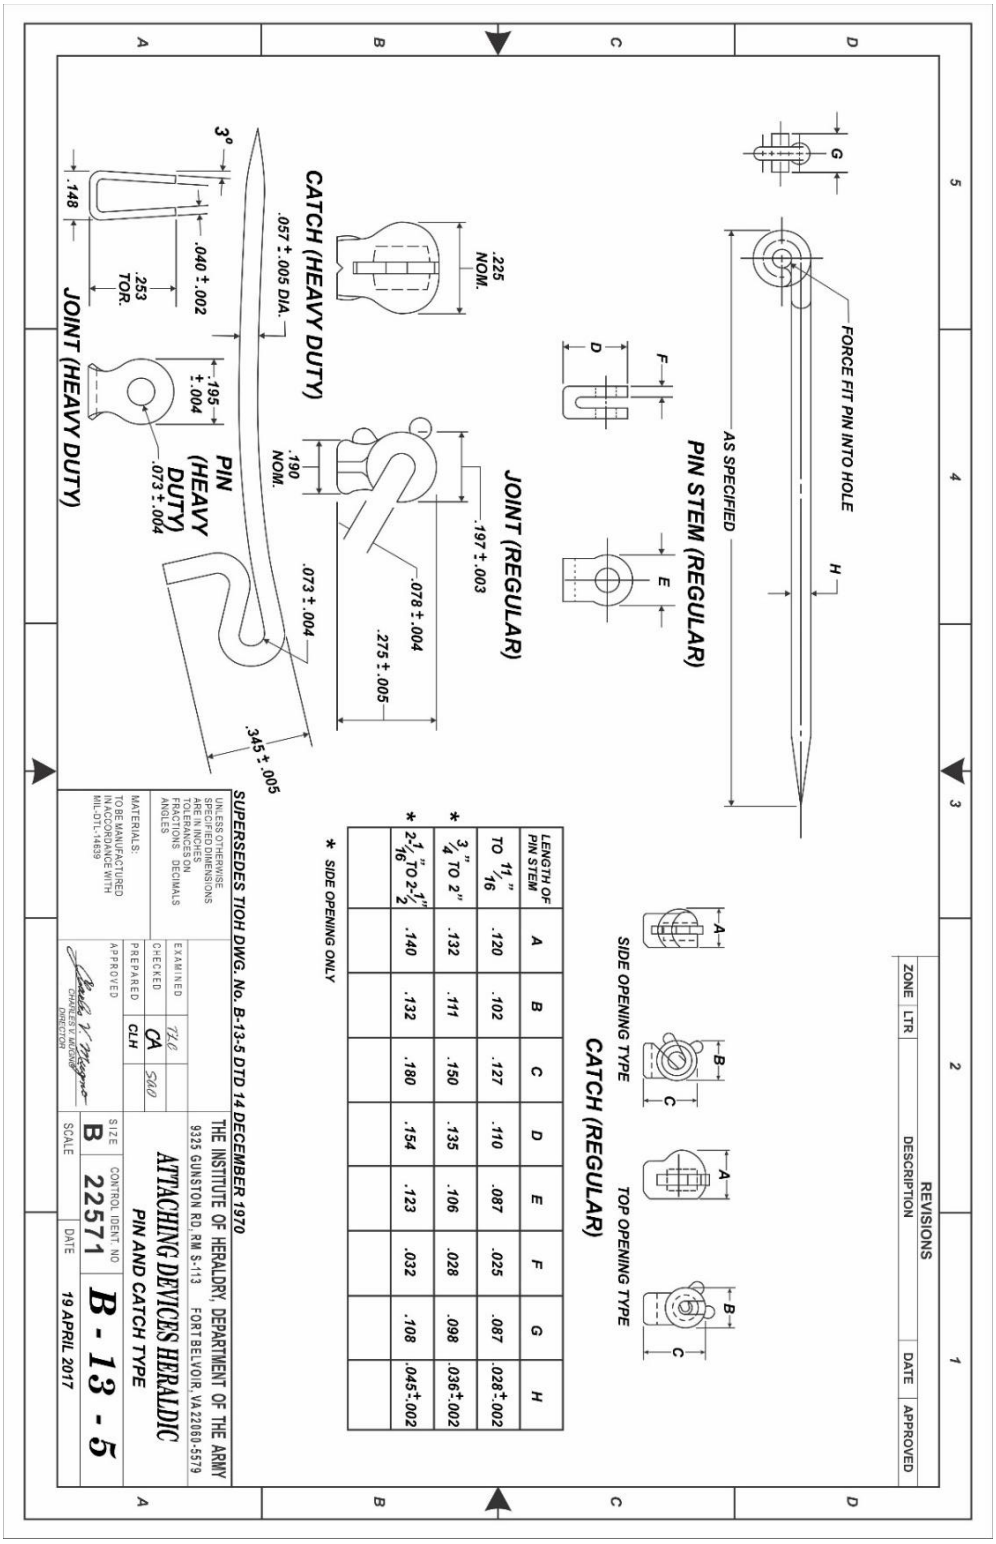

LENGTH OF PIN STEM	A	B	C	D	E	F	G	H
TO 11/16"	.120	.102	.127	.110	.087	.025	.087	.028±.002
* 3/4" TO 2"	.132	.111	.150	.135	.106	.028	.098	.036±.002
* 2 1/16" TO 2 1/2"	.140	.132	.180	.154	.123	.032	.108	.045±.002

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

FIGURE 1. **B-13-5: Attaching Devices Heraldic, Pin & Catch type.**

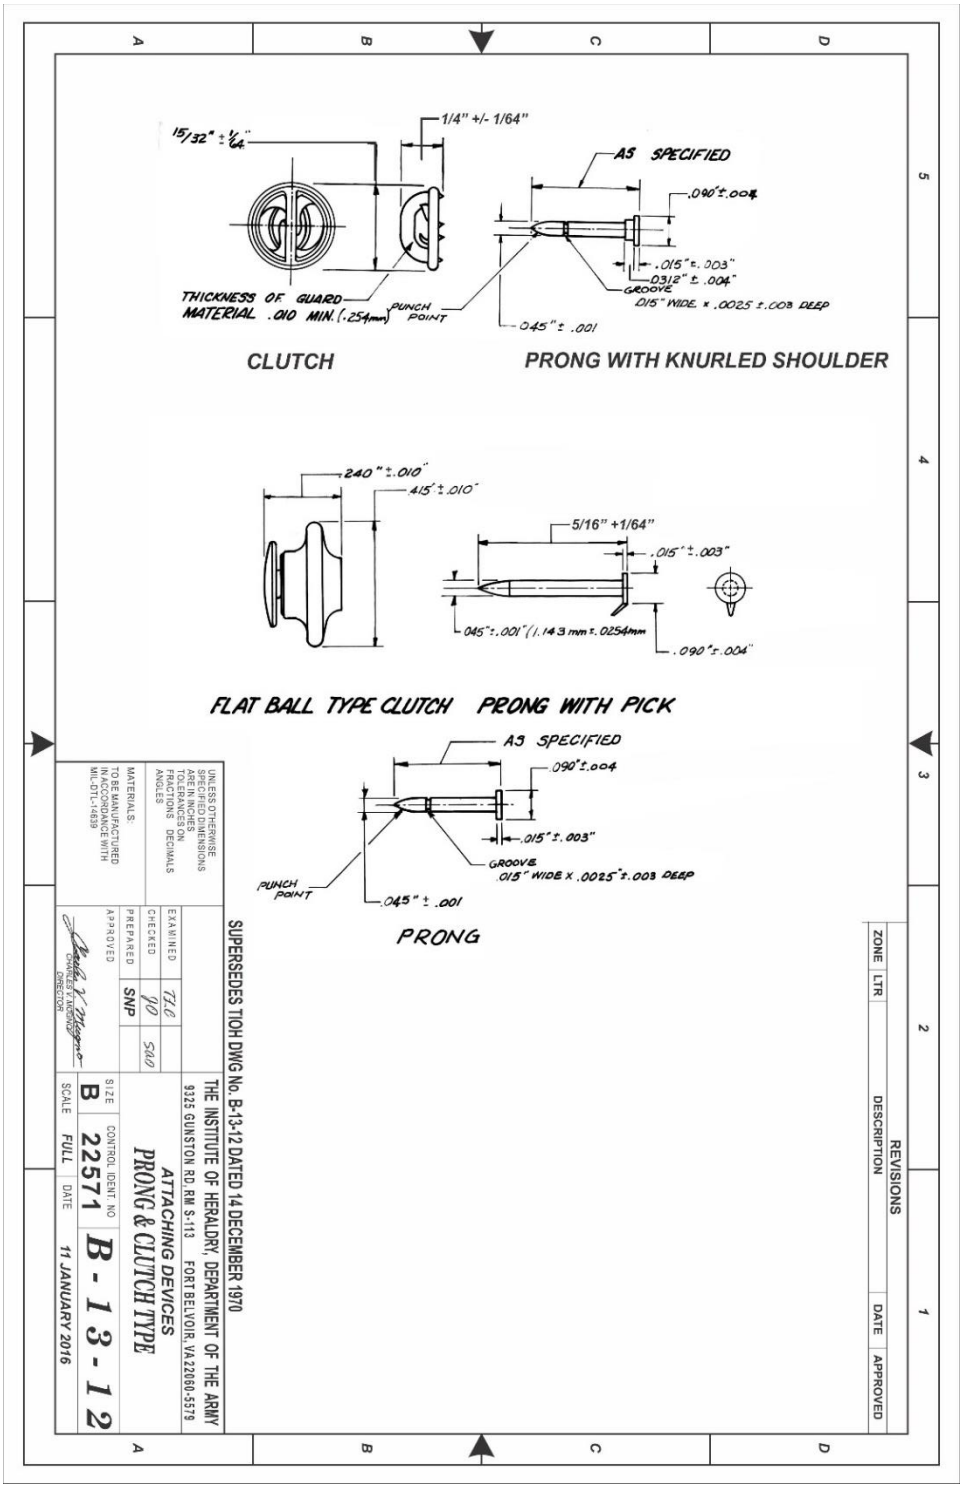


FIGURE 2. **B-13-12: Attaching Device, Heraldic Prong and Clutch Type**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

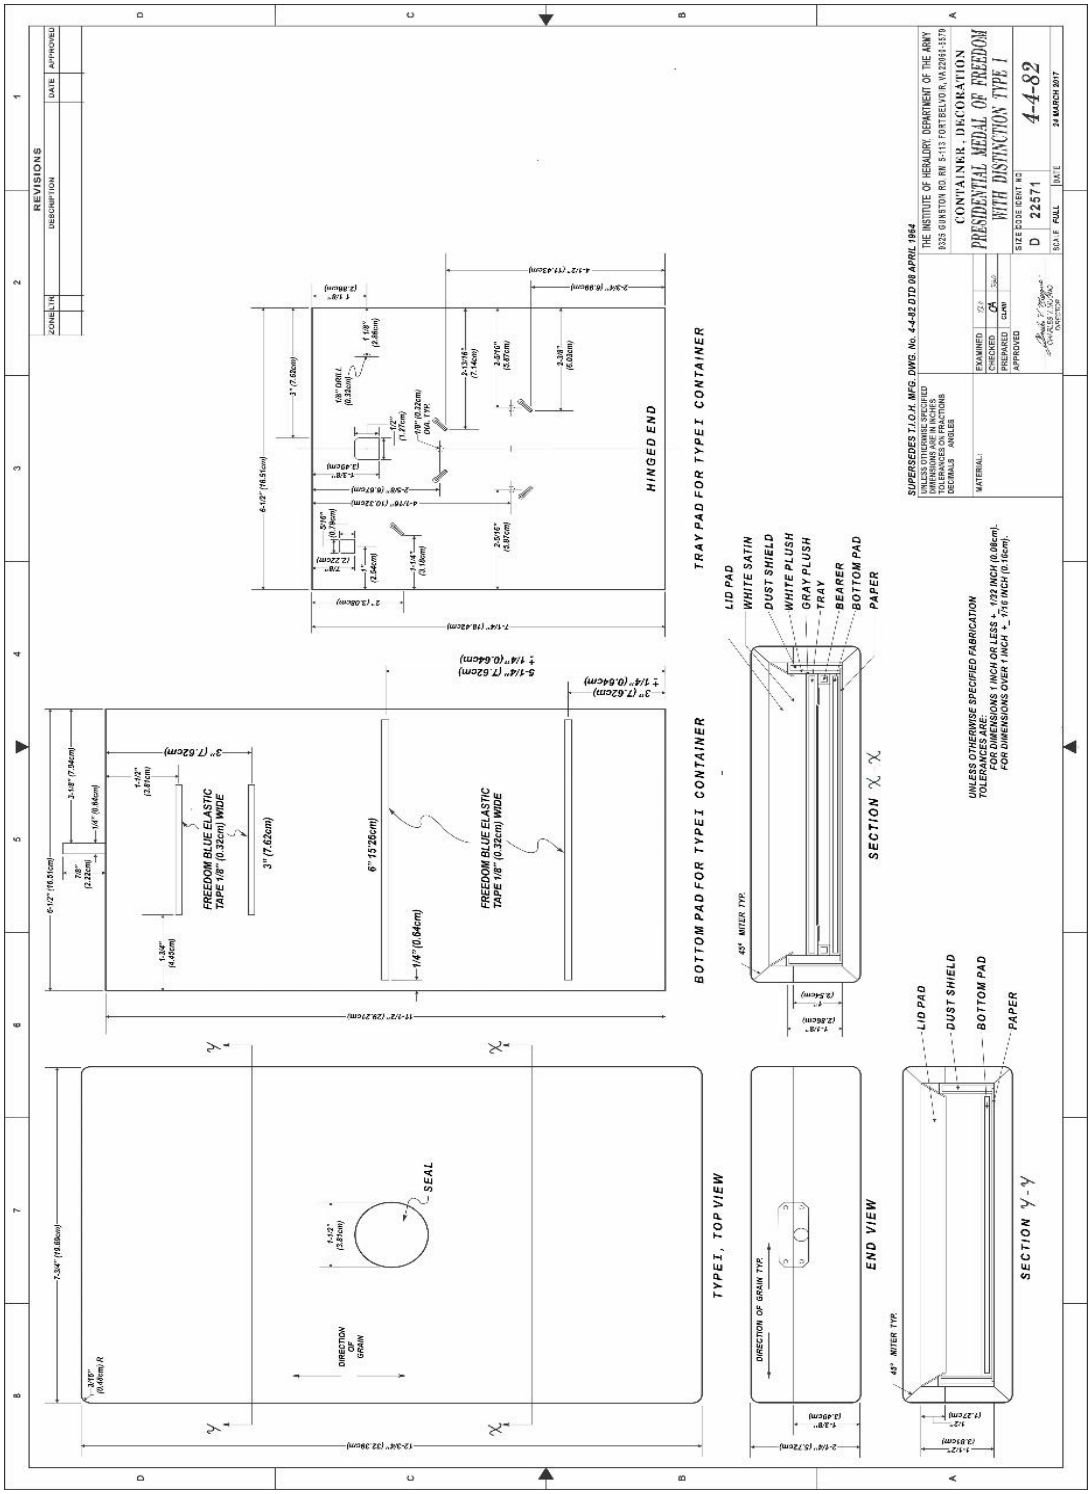


FIGURE 3. **4-4-82: Container, Decoration, Presidential Medal of Freedom with Distinction-Type I**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

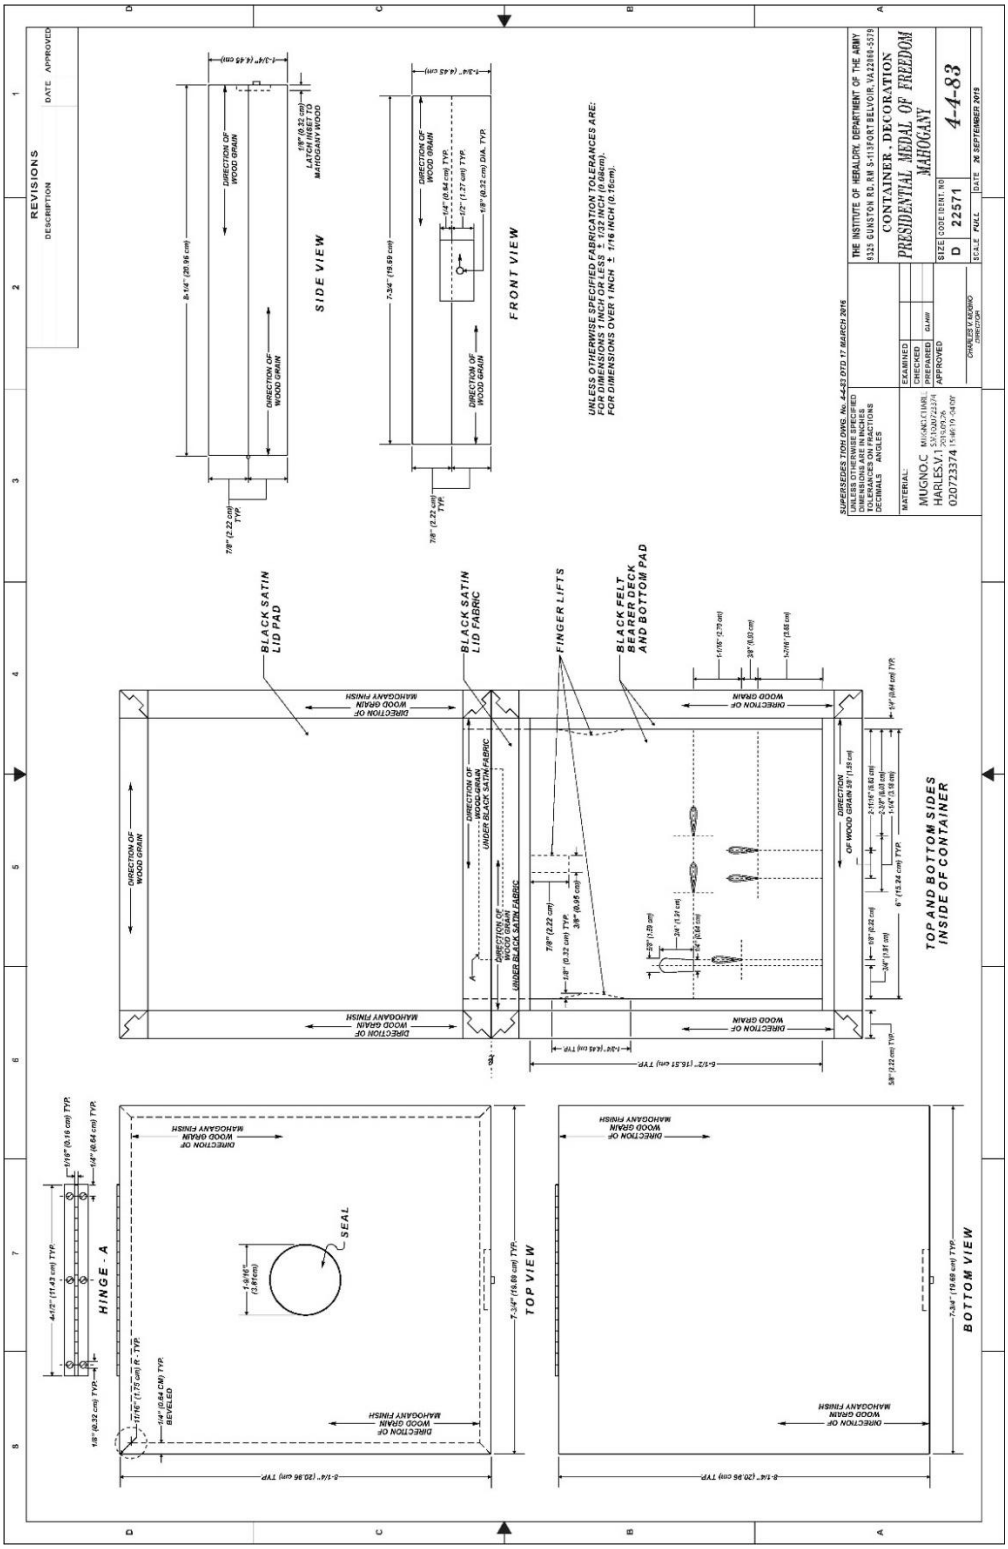


FIGURE 4. **4-4-83: Container, Decoration, Presidential Medal of Freedom with Distinction-Type II**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

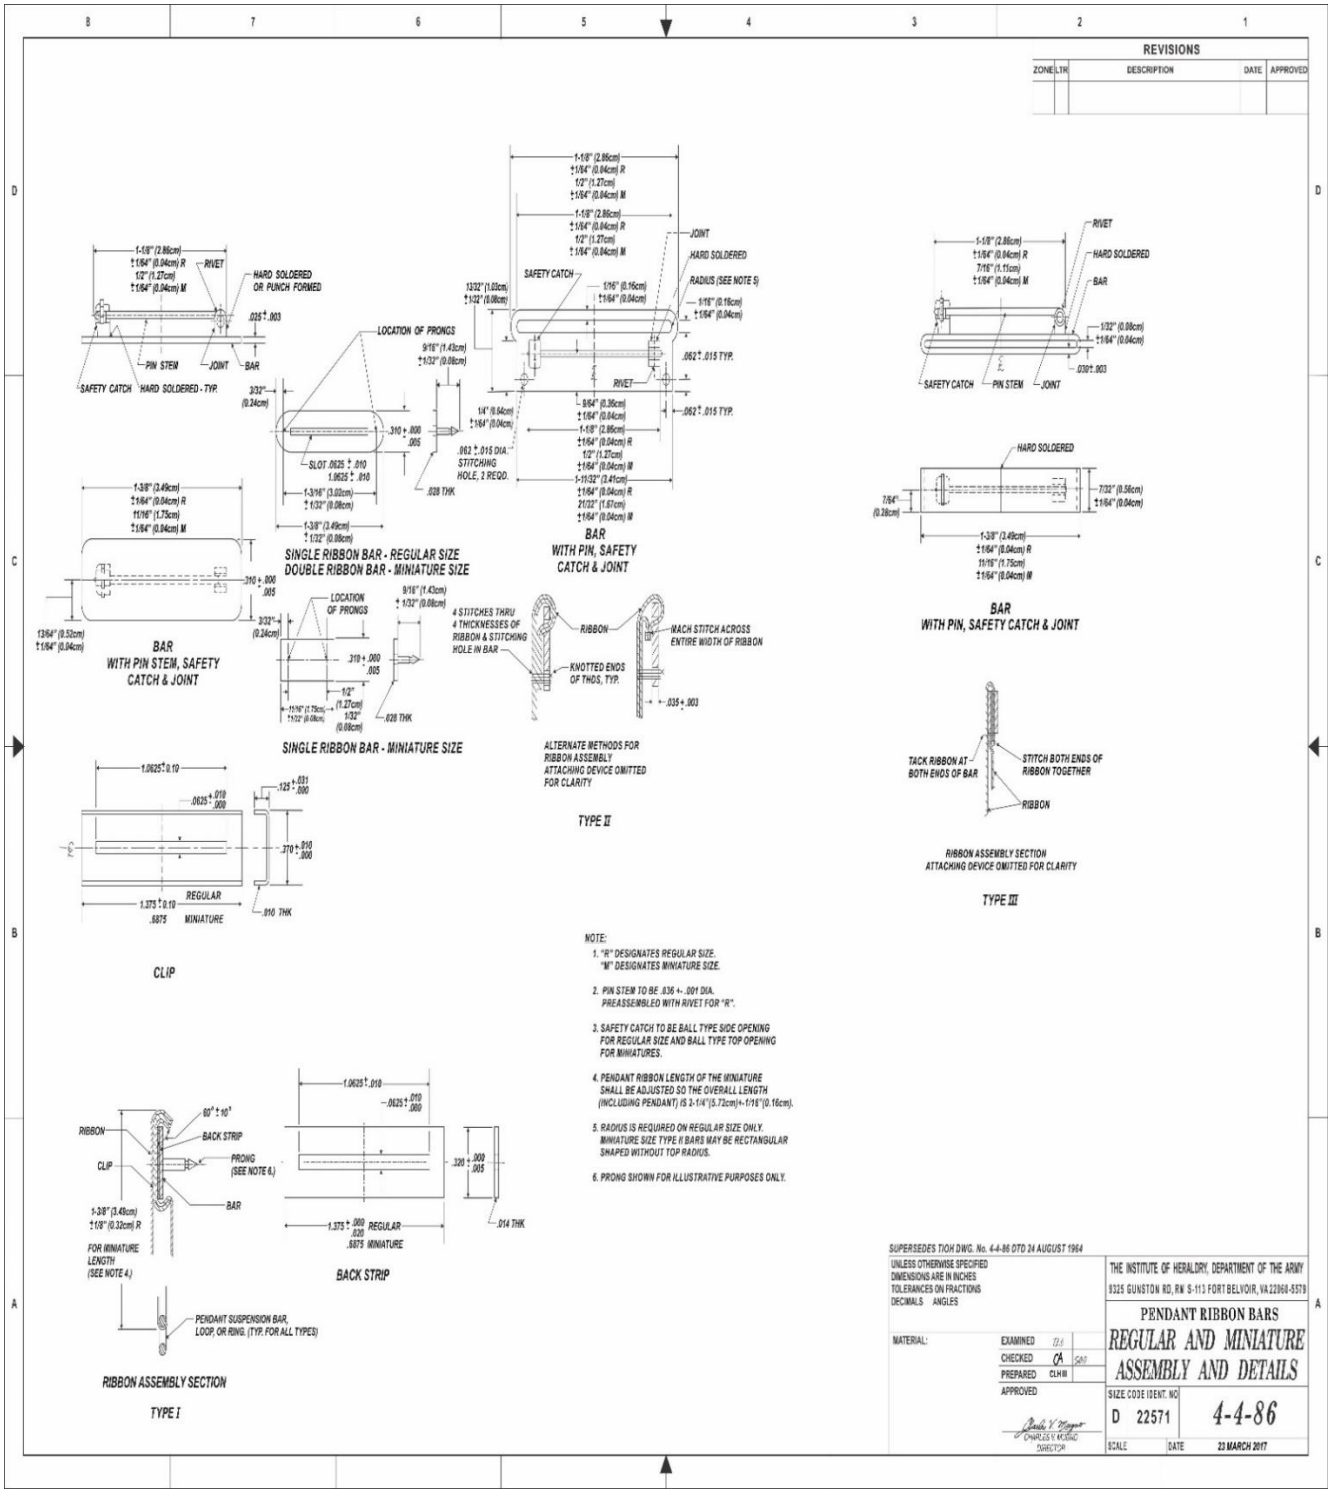


FIGURE 5. **4-4-86: Pendent Ribbon Bars, Regular and Miniature Assembly and Details**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.


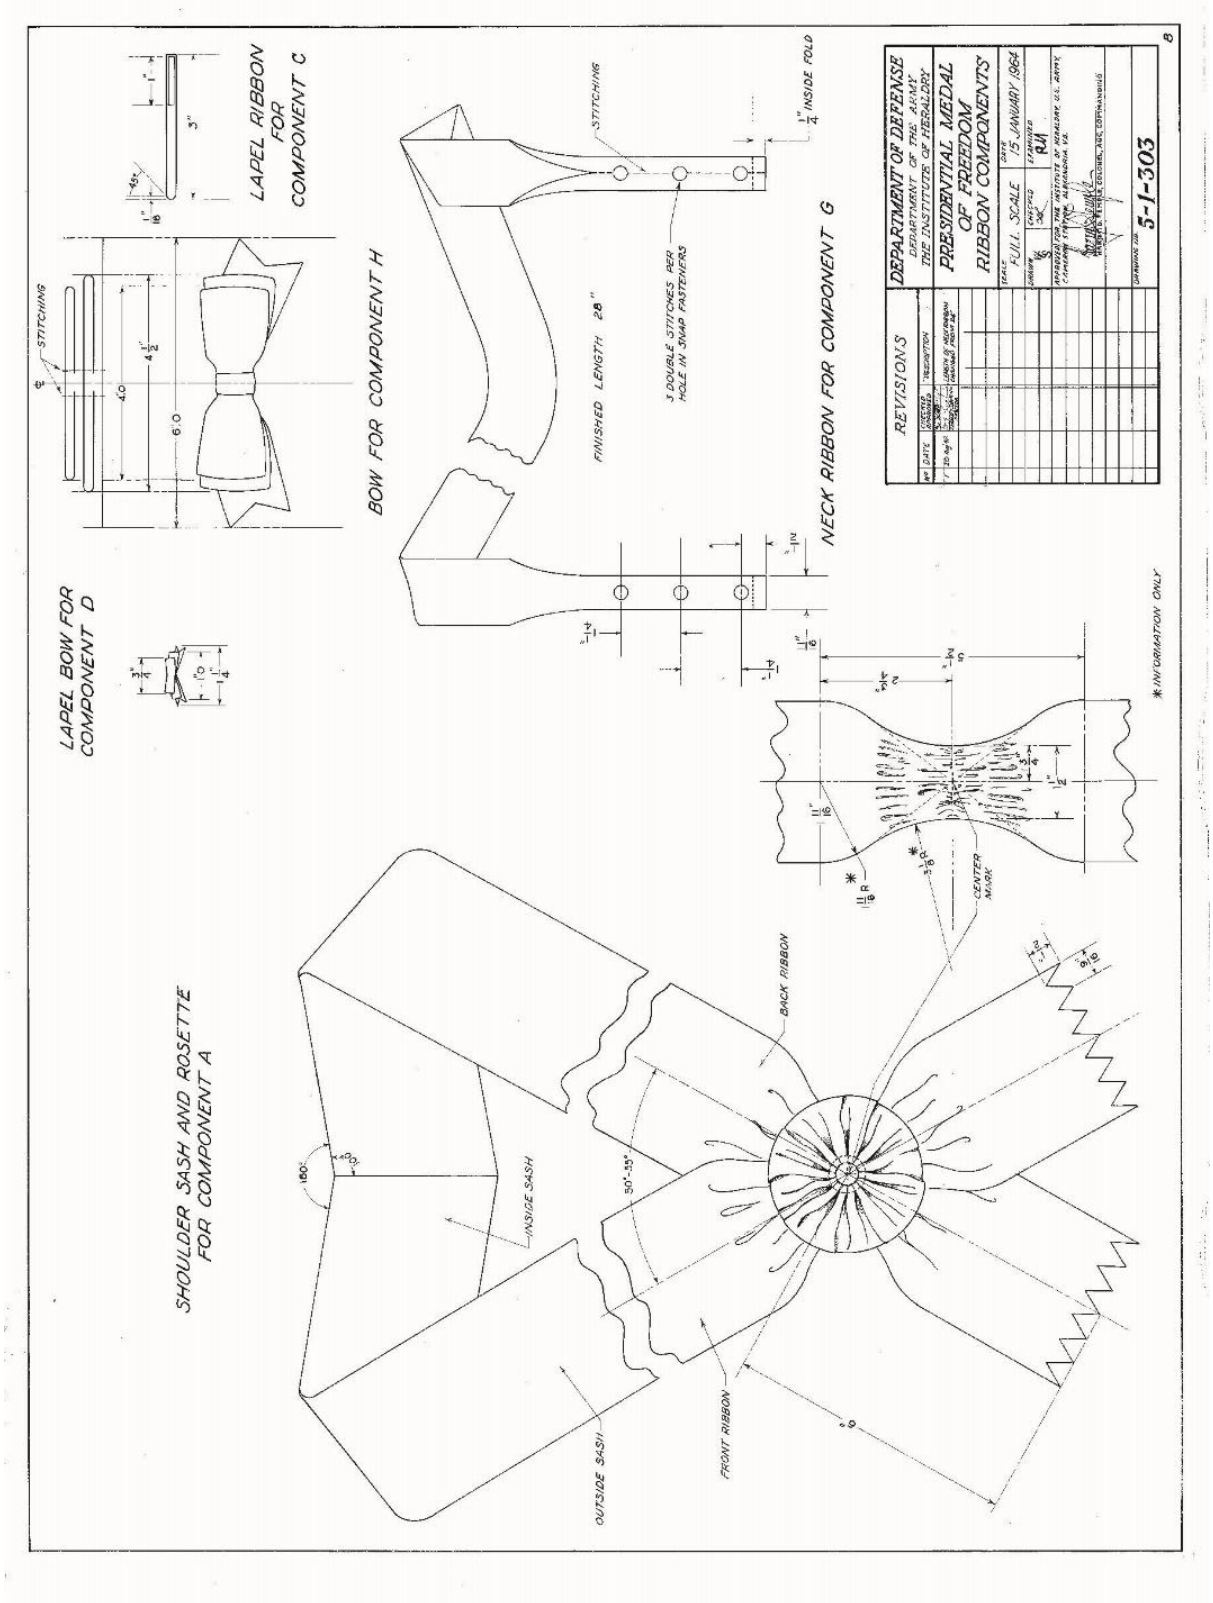


FIGURE 6. **5-1-303 PRESIDENTIAL MEDAL OF FREEDOM RIBBON COMPONENT.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

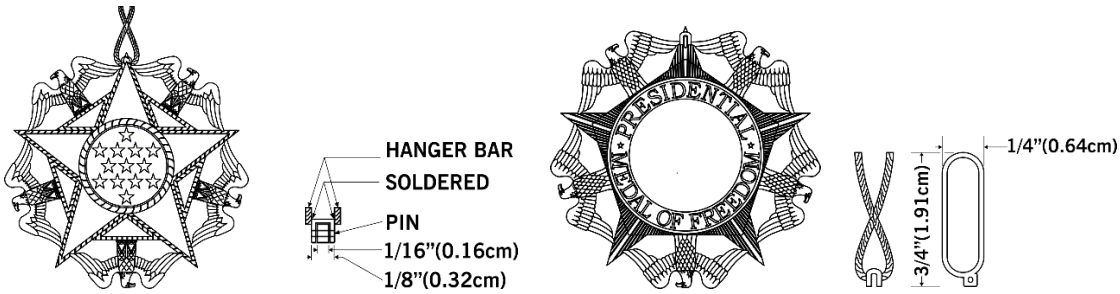

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Epoxy resin, 24K Gold Plated Matte Finish and will match The Institute of Heraldry Standard Metal Finish Chip Number 7.

DIMENSIONS:
DIAMETER: 2 inches (REF)
THICKNESS:
Center of the Rope Cord for Hanger Bar: 0.055 inch ± .010 inch
Eagle's Breast: 0.140 inch ± .010 inch
Center of Pendant: 0.230 inch ± .010 inch

EPOXY: Epoxy resin (Stoning epoxy) will be applied to the Decoration as indicated above, and will match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR AN NUMBERS	**LOCATION**
Blue #18	See Drawing
White #28	See Drawing
Red #1	See Drawing


NOTES:
1. The "X" formed by the rope cord will be centered on the length of the hanger.

2. The serial number will be engraved in the location shown by XX and will be as specified in the basic document.

3. White epoxy will be built up to follow the curvature of the star.

FIGURE 7. **PRESIDENTIAL MEDAL OF FREEDOM**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

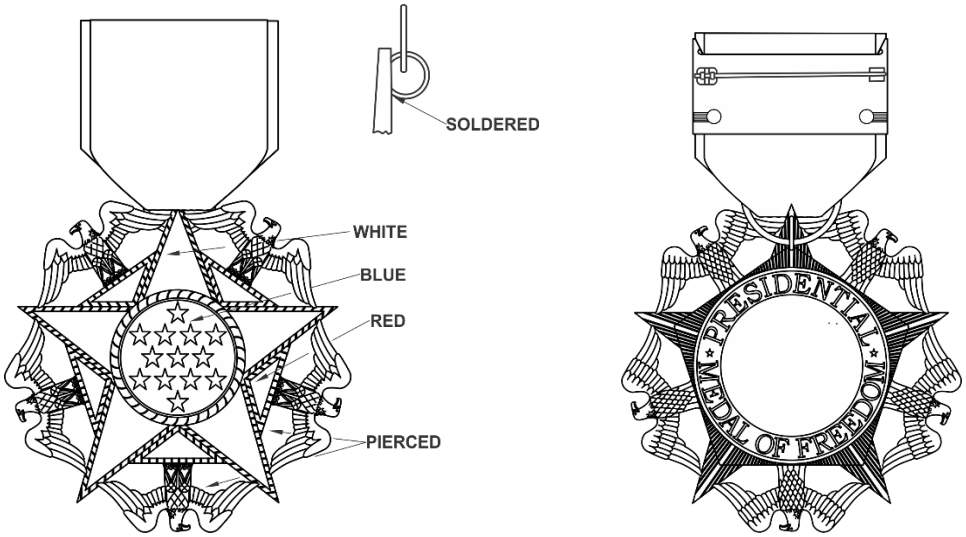

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Epoxy resin, 24K Gold Plated Matte Finish and will match The Institute of Heraldry Standard Metal Finish Chip Number 7.

DIMENSIONS:
DIAMETER: 1 inches (REF)
THICKNESS:
Center: 0.130 inch ± .010 inch
Eagle's Breast: 0.80 inch ± .010 inch

ATTACHMENT RING: The attachment ring fabricated from .032 inch nominal diameter brass wire and having an outside diameter of. The holes will be 1/8 ± 1/64 inch will be soldered to the top of the star point on the reverse side of the pendant.

PENDANT RIBBON RING:
1. The pendant ribbon ring will be fabricated from type brass wire (.032 nominal diameter) and will have an outside diameter of 5/16 ± 1/64 inch.

2. The finish of the pendant ribbon ring will match the finish of the pendant.

PENDANT RIBBON BAR: Pendant ribbon bar will be as shown on figure 5, except the overall length of the clip, bar and pen stem will be half (1/2) of the dimensions shown and the overall height of the pendant ribbon bar will be 15/32 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.


EPOXY: Epoxy resin (Stoning epoxy) will be applied to the Decoration as indicated above, and will match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR AN NUMBERS	**LOCATION**
Blue #18	See Drawing
White #28	See Drawing
Red #1	See Drawing

NOTE: White epoxy will be built up to follow the curvature of the star.

FIGURE 8. **PRESIDENTIAL MEDAL OF FREEDOM MINIATURE.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

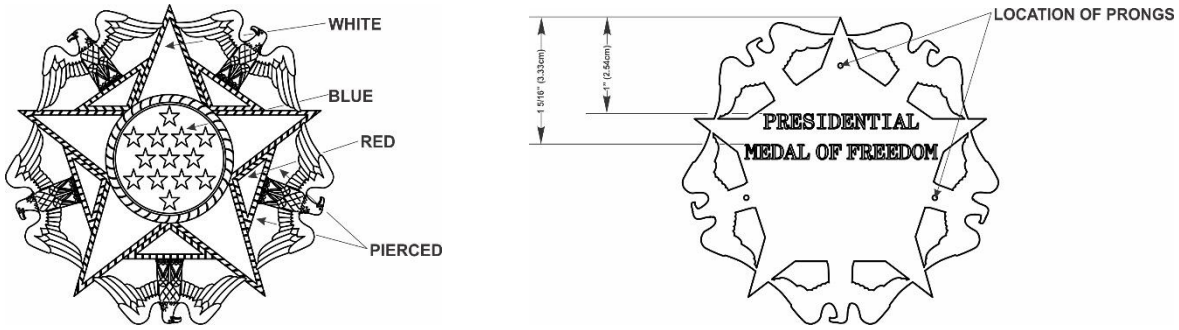

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Epoxy resin, 24K Gold Plated Matte Finish and will match The Institute of Heraldry Standard Metal Finish Chip Number 7.

DIMENSIONS:
DIAMETER (Including circle): 3-1/4 inches (REF)
THICKNESS:
Center: 0.175 inch ± .010 inch
Eagle's Head and Rope at Eagle's Feet: 0.100 inch ± .010 inch

PRONGS: Prongs will be 3/8 ± 1/64 inch in length and will be located as shown.

EPOXY: Epoxy resin (Stoning epoxy) will be applied to the Decoration as indicated above, and will match TIOH Hard Enamel Color Chip Numbers listed below.


TIOH HARD ENAMEL COLOR CHIPS	
COLOR AN NUMBERS	**LOCATION**
Blue #18	See Drawing
White #28	See Drawing
Red #1	See Drawing

NOTES:
1. Engraving will be located as shown and will be as specified in the basic document.

2. White epoxy will be built up to follow the curvature of the star.

FIGURE 9. **PRESIDENTIAL MEDAL OF FREEDOM BREAST BADGE.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

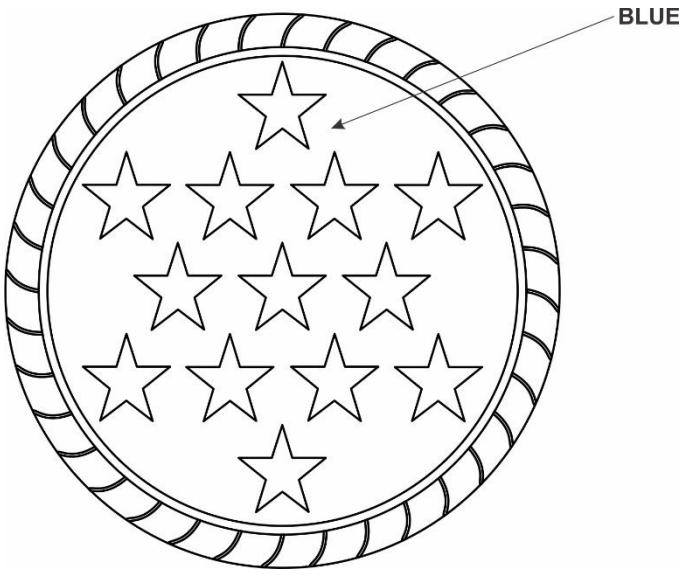

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Epoxy resin, 24K Gold Plated Matte Finish and will match The Institute of Heraldry Standard Metal Finish Chip Number 7.

DIMENSIONS:
DIAMETER: 2 inches (REF)
THICKNESS (At the rope edge): 0.085 inch ± .010 inch

PRONGS:
1. Prongs shall be 3/8 ± 1/64 inch in length.

2. Three prongs will be located on a 1-3/8 ± 1/32 inches circle, 120 degree apart, with one prong located at the top of the vertical center line of the badge.


EPOXY: Epoxy resin (Stoning epoxy) will be applied to the Decoration as indicated above, and will match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR AN NUMBERS	**LOCATION**
Blue #18	See Drawing

NOTE: Mock forcer may be used to bring up the center.

FIGURE 10. **PRESIDENTIAL MEDAL OF FREEDOM SASH BADGE.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

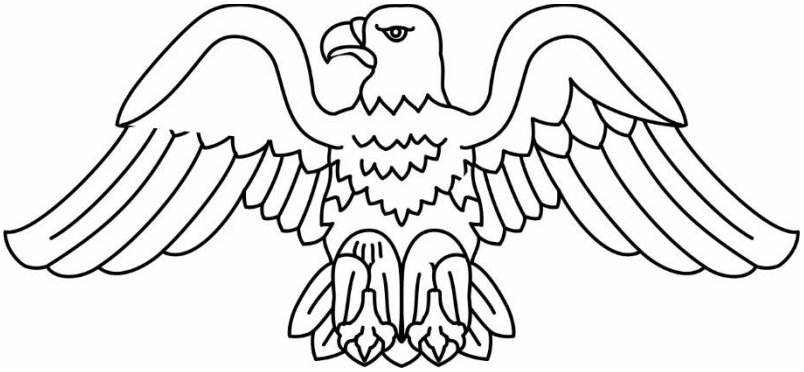

DASH NO:

-1: Lapel Device, Presidential Medal of Freedom with Distinction
-2: Lapel Device, Presidential Medal of Freedom
-3: Ribbon Device, Presidential Medal of Freedom with Distinction
-4: Ribbon Device, Presidential Medal of Freedom

MATERIAL: (-1,-2,-3 and -4) Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
-1 and -3: Epoxy resin, 24K Gold Plated Matte Finish and will match The Institute of Heraldry Standard Metal Finish Chip Number 7.

-2 and -4: Sterling Silver

DIMENSIONS:
HEIGHT (Overall): 5/16 inch (REF)
WIDTH (Overall): 11/16 inch (REF)
THICKNESS Thickest point): 0.075 inch $\pm$ .010 inch

ATTACHIN DEVICE:
1. -1 and -2 will be prong and clutch. The prong will be centered on and soldered or fused to the reverse of the device.

2. -3 and -4 will be staple type prong. The prong will be fabricated from nickel silver wire (.26 Nominal diameter) and will be 5/16 $\pm$ 1/64 inch in length. The prong will be centered on and soldered or fused to the reverse of the device. The point of the prongs will be either cone pointed or bias cut.

FIGURE 11. **PRESIDENTIAL MEDAL OF FREEDOM LAPEL AND RIBBON DEVICE.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing Activity:
Army - IH

Review Activity:
DLA - CT

(Project No. 8455-2021-288)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.