MILITARY SPECIFICATION

INSIGNIA, SHOULDER LOOP, COMBAT LEADER IDENTIFICATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

.1 This specification covers one type of insignia worn on the shoulder loop to designate combat leader.

APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

C-F-206 - Felt, Sheet, Cloth, Felt, Wool, Pressed
PPP-B-566 - Boxes, Folding, Paperboard
PPP-B-676 - Boxes, Setup
PPP-B-636 - Box, Shipping, Fiberboard

MILITARY

MIL-F-10884 - Fasteners, Snap

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

BENEFICIAL COMMENTS (RECOMMENDATIONS, ADDITIONS, DELETIONS) AND ANY PERTINENT DATA WHICH MAY BE USED IN IMPROVING THIS DOCUMENT SHOULD BE ADDRESSED TO: DIRECTOR, THE INSTITUTE OF HERALDRY, US ARMY, CAMERON STATION, ALEXANDRIA, VA 22314, BY USING THE SELF-ADDRESSED STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL (DD FORM 1426) APPEARING AT THE END OF THIS DOCUMENT OR BY LETTER.

/FSC 8455/

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

DRAWING

A-13-49 - Insignia, Shoulder Loop. Combat Leader's Identification

(Copies of specifications, standards and drawings required by the contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.) (Figure 1 is a miniature reproduction of the referenced drawing and is attached for information purposes only.)

2.2. Other publications. - The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Standard Color Card of America, 9th Edition

(Application for copies of the color card should be addressed to The Color Association of the United States, Inc.; 200 Madison Avenue; New York, NY 10016.)

3. REQUIREMENT

3.1 Standard shade sample. - When specified (see 6.2) a standard shade sample shall be furnished for matching color and colorfastness only.

3.2 First article.- When specified (see 6.2), before production is commenced a sample of the furnished item shall be submitted or made available to the contracting officer or his authorized representative for inspection and tests as specified in 4.2. The approval of the first article authorizes the commencement of production but does not relieve the manufacturer of responsibility for compliance with all applicable provisions of this specification. The first article shall be manufactured in the same manner and by the same facilities to be used for the production items.

3.3 Materials.- Materials shall conform to the referenced specifications and the requirements specified herein.

3.3.1 Felt.- The felt for the shoulder loop shall conform to type III, class 7A1 of C-F-206.

3.3.1.1 Color and colorfastness.- The felt shall be Hunter Green conforming to Cable Number 70064 and shall show fastness to wet-dry cleaning, crocking and light equal to or better than the standard shade sample. When no standard is available the felt shall show good fastness to wet-dry cleaning, crocking and light for forty hours.

3.3.2 Snap fasteners.- Snap fasteners shall conform to style 3, 17 ligne, finish 2 of MIL-F-10884.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

3.4 Construction.- Shoulder loops shall be constructed in accordance with the details and dimension on drawing A-13-49. All corners shall be 90 degree angles and sides shall be straight. Snap fasteners specified in 3.3.2, shall be located as shown and securely clinched without cutting the material.

3.5 Workmanship.- Shoulder loops shall be clean, well made and shall meet the acceptable quality levels established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the supplier may use his own or any other facilities suitable for the performance of inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4. First article inspection.- When first articles are required, inspection and testing of the first article shall be made on a completely fabricated insignia for all provisions of this specification applicable to the end product examination and tests.

4.3 Inspection for acceptance.- Unless otherwise indicated, inspection shall be in accordance with MIL-STD-105.

4.3.1 Component testing.- In addition to the quality assurance provisions of the subsidiary specifications and drawings, testing shall be performed on components and materials listed in table I for test characteristics shown. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 6.5 defects per hundred units. Testing shall be in accordance with FED-STD-191.

TABLE I Component testing.-

Component	Characteristic	Rqm't ref	Test method	Lot size expressed	Sample unit for testing
Felt	Colorfastness to:				
	Wet-dry cleaning	3.3.1.1	5622	1 yard	1 yard long
	Crocking		5651		1 5/8" wide
	Light 1/		5660		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

1/ In the event of a dispute resulting from the test with Method 5660, or as a result of suspected anomalous behavior of certain dye types or formulations, the contracting officer may authorize the exposure to natural light in accordance with Method 5662.

4.3.2 Inspection of end item.-

4.3.2.1 Visual examination.- Defects found during the examination shall be scored in accordance with the listing below. The lot size shall be expressed in terms of one insignia. The sample size shall be in accordance with inspection level II and the AQL shall be 4.0 defects per hundred units.

Examine	Defect
Quality of cloth	
Color	Color other than specified. Off shade.
Material	Hole, cut, tear, smash or weak place. Spot, stains, streaks or shade bars. Open, breaks or thin areas. Abrasion or rub. High, thick or lumpy area. Wrinkle or crease. Objectionable odor. Not clean. Extraneous foreign matter.
Snap fastener	Male or female portion missing or broken. Male or female portion split. Malformed, misshapen, damaged or otherwise impaired. Out of alignment or not in location specified. Not type specified. Finish not as specified. Burr or sharp edge. Not securely attached. Will not function as intended.

4.3.2.2 Examination for defects in dimensions.- Any dimension that is not within the specified tolerance shall be classified a defect. The lot size shall be expressed in units of one insignia. The end product shall be one insignia. The sample size shall be in accordance with S-3 and the AQL shall be 4.0 defects per hundred units.

4.3.2.3 Examination for count.- The following shall govern this examination:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

Examination	Lot expressed in units of	Unit of product	No. of units	Sample Size No. of units
a. #insignia per folding or set-up box	One folding or set-up box	One folding or set-up box	Up to 300 301 or over	4 5
b. #folding or set-up boxes per shipping container	One shipping container	One shipping container	Up to 3 4 to 6 7 and over	All 3 4

The lot shall be unacceptable if any of the following are found:

(a) Number of insignia per folding or set-up box.

(1) The average number of insignia per box in sample is less than specified or the quantity marked on the box.

(2) The number of insignia in any box is more than 5 percent under the quantity specified or the quantity marked on the box.

(b) Number of insignia per shipping container - actual number of insignia per container is less than specified or less than quantity marked on container.

4.3.3 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are compiled with. Defects shall be scored in accordance with defects list below. Sample unit shall be one shipping container fully packed, selected just prior to the closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Material	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as, incomplete closure of case liners, container flaps, loose strapping, inadequate stapling.
	Bulging or distortion of containers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.- One hundred twenty five pair of shoulder loop insignia shall be packaged in a setup, paperboard box conforming to variety 1, style III or IV type B, class A of PPP-B-676 or a folding paperbox conforming to variety 1, style III, type B, class A of PPP-B-566. Closure shall be in accordance with the appendix of the applicable box specification.

5.1.2 Level C.- Shoulder loop insignia shall be packaged to afford protection against deterioration and damage during shipment from the supply source to the first receiving activity.

5.2 Packing.- Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A.- Five thousand pair (40 intermediate boxes) of shoulder loop insignia packaged as specified in 5.1 shall be packed in a snug-fitting fiberboard shipping container conforming to Class Weather Resistant, V3s or V3c of PPP-B-636. Closure shall be in accordance with the appendix of the container specification. The weight of the contents of each shipping container shall not exceed the size and weight limitations of the container specification.

5.2.2 Level B.- Five thousand pair (40 intermediate boxes) of shoulder loop insignia packaged as specified in 5.1 shall be packed in snug-fitting fiberboard box conforming to class Domestic, grade 275 of PPP-B-636. Closure shall be in accordance with the appendix of the container specification. The weight of the contents of each shipping container shall not exceed the size and weight limitations of the container specification.

5.2.3 Level C.- Shoulder loop insignia shall be packed in containers which are acceptable by common or other carriers for safe transportation to point of destination specified in shipping instructions at the lowest transportation rate for such supplies.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129, except the interior packages shall be marked with the contractor's name and the contract or order number.

6. NOTES

6.1 Intended use.- Shoulder loop insignia covered by this specification are intended to be worn by Army personnel to indicate the wearer is designated a combat leader.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this purchase description.

(b) When a standard shade sample will be furnished (see 3.1).

(c) When a first article is required (see 3.2).

(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 The naphthalene flakes requirement is not applicable when Government furnished wool or part wool fabric has been moth proof treated.

6.4 Supersession data.- This specification includes the requirements of the Institute of Heraldry Purchase Description IH-1-73.

Custodian: Army - IH
Review Activity: DLA-CT
User Activity: Army - SM

Preparing Activity:
The Institute of Heraldry,
United States Army

Project No. 8455-A457

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

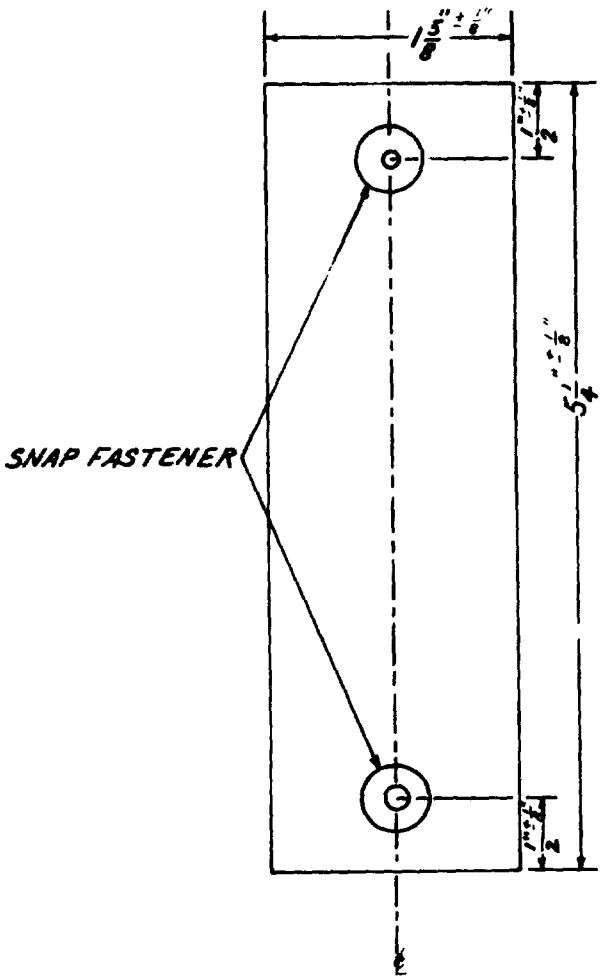


FIGURE 1

INSIGNIA, SHOULDER LOOP

COMBAT LEADER'S IDENTIFICATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner, and send to preparing activity

SPECIFICATION

MIL-I-14646(IH) Insignia, Shoulder Loop, Combat Leader Identification

ORGANIZATION | CITY AND STATE

CONTRACT NO | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT

$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
THE INSTITUTE OF HERALDRY, U.S. ARMY
CAMERON STATION
ALEXANDRIA, VA. 22314

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

COMMANDING OFFICER
THE INSTITUTE OF HERALDRY, U.S. ARMY
ATTN: AGAH-T
CAMERON STATION
ALEXANDRIA, VA. 22314

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:16Z
Check the source to verify that this is the current version before use.