NOT MEASUREMENT SENSITIVE

MIL-T-14643C
25 October 1994
SUPERSEDING
MIL-T-14643B
28 April 1989

MILITARY SPECIFICATION

TAG, IDENTIFICATION, INDIVIDUAL, PLASTIC, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type and size of plastic identification name tag used by individual Air Force personnel (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

PPP-B-636 - Box, Shipping, Fiberboard
PPP-B-676 - Boxes, Set-Up

STANDARDS

FEDERAL

FED-STD-595 - Colors Used in Government Procurement

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in preparing this document should be addressed to: Director, The Institute of Heraldry, U.S. Army, 9325 Gunston Road, Room S112, Fort Belvoir, VA 22060-5579, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from: Department of Defense Single Stock Point, DODSSP - Customer Service, Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

THE INSTITUTE OF HERALDRY (TIOH)

B-13-12 - Attaching Devices, Heraldic, Prong and Clutch Type
B-13-13 - Tag, Name, Air Force

(Copies of specifications, standards, drawings and specification sheets required by the contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

(Figures 1 and 2 are miniature copies of Institute of Heraldry drawings and are for information only.)

2.2 Non-Government publications. The following documents form a part of this document to the extend specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are issues of the documents cited in the solicitation (see 6.2)

AMERICAN SOCIETY FOR TESTING AND MATERIALS

ASTM-D-3951 - Standard Practice for Commercial Packaging

(Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Non-government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other information services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.4.

3.2 Materials. Materials shall be as specified herein. Recovered material shall be used to the maximum extent possible.

3.2.1 Plastic. The plastic for the tag shall be a rigid or flexible shatter proof acrylic plastic suitable for laminating and engraving having the following physical characteristics:

Specific gravity – 1.00 minimum.
Elongation – 38 percent maximum.
Shear strength – 4600 psi maximum.

3.2.1.1 Color. The colors of the plastic shall conform to FED-STD-595. The base shall be white conforming to chip number 27880 and the top shall be ultramarine blue conforming to chip number 15056.

3.2.2 Copper base alloy. The copper base alloy shall be roll polished, free from pits, scale (including red oxide), dents, nicks, cracks, scratches, segregations and foreign inclusions that will not be removed in later processing. When tested as specified in 4.6.1, the chemical composition of the copper base alloy shall be a specified in Table I.

TABLE I. CHEMICAL COMPOSITION

Alloy	Copper	Nickel 1/	Lead (Max)	Iron (Max)	Manganese (Max)	Zinc	Others (Max)
Yellow Brass	64.0 - 68.5	--	0.15	0.05	--	Remainder	0.15
Red Brass	84.0 - 86.0	--	0.05	0.05	--	Remainder	0.15
Nickel Silver	63.0 - 65.5 2/	16.5 - 19.5	0.10	0.25	0.50	Remainder	--

1/ Cobalt counting as nickel.
2/ Copper content for the nickel silver prong only may be 53.5 to 56.5%.

3.2.3 Glue. When glue is used to secure the back plate to the base, any suitable type molecular glue may be used.

3.3 Design. The design of the name tag shall be as shown on Drawing B-13-13 (see Figure 2).

3.4 Construction. The body of the name tag shall be made of two pieces; the top piece and the back plate. The top piece shall consist of two pieces of plastic specified in 3.2.1 molded or laminated together. The obverse face shall be protected by a masking film to prevent damage to the surface. The back plate shall be made

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

from any type brass, shall be a minimum 0.025 inch (0.064 cm) thick and shall be 2 to 2-3/4 inches (5.08 cm to 6.99 cm) long by 3/16 to 3/8 inches (0.48 cm to 0.95 cm) wide. The back plate shall be centered on the back of the tag and shall be glued and/or molded in place. When tested as specified in 4.6.2, the back plate shall not pull away from the tag. Back plates design A and B of Drawing B-13-13 (see Figure 2) or any similar designs will be considered acceptable.

3.4.1 Attaching device. The attaching device shall consist of two prongs and clutches and shall conform to the details and dimensions of Drawing B-13-12 (see Figure 1). The prongs shall be made from nickel silver specified in 3.2.2 and shall be 5/16 inch ± 1/64 inch (0.79 cm ± 0.04 cm) long. Placement of the two prongs to the back plate shall conform to the dimensions of Drawing B-13-13 (see Figure 2) with a tolerance of plus or minus 1/32 inch (0.08 cm). Clutches as shown on Drawing B-13-12 (see Figure 1) shall be made from any type brass. When tested as specified in 4.6.3, it shall not be possible to remove the clutch from the prong without first depressing the release wings.

3.5 Marking for identification. The contractor shall stamp his trade or other identifying mark, the letters "GI" (GI for government procurement only) legibly and inconspicuously on the viewing face of the back plate.

3.6 Workmanship. The finished item shall be clean, well made, and shall conform to the acceptable quality levels established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements; however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in 4.5 and 4.6.

4.4 First article inspection. Inspection and testing of the first article (see 3.1) shall be made of a completely finished item for all provisions of this specification applicable to the end product examination and tests.

4.5 Quality conformance inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated (see 6.3).

4.5.1 Inspection of components.

4.5.1.1 Testing of components. In addition to the quality assurance provisions of the subsidiary specifications and drawings, inspection shall be performed on components and materials listed in Table II for the test characteristics shown therein.

Table II. TESTING OF COMPONENTS

Component and lot expressed in terms of	Charac-teristic	Rqm't Para	Test Method	Rqm't applicable to lot average	#determ per sample unit	Results Reported as	Sample Unit
Copper base alloy (1 lb) as applicable	*Chemical composition	3.2.2	Standard Comm'l	X	2 each element	Nearest 0.1% for each element	4 oz material each alloy or 10 prongs
Plastic	*Specific gravity	3.2.1	Standard Comm'l	X	2 each	Nearest 0.1%	As required
	*Elongation	3.2.1	Standard Comm'l	X		Nearest 0.1%	As required
	*Shear strength	3.2.1	Standard Comm'l	X	2 each		

*Will be accepted on manufacturer's certification of compliance.

4.5.1.1.1 Certification of compliance. Materials listed below may be accepted on the basis of the contractor's certificate of compliance for requirements specified in applicable paragraphs of this specification.

COMPONENTS	CHARACTERISTICS	ROM'T PARA
Copper base alloy	Material identification	3.2.2
Brass for prongs (when applicable)	Material identification	3.2.2
Nickel silver for prong (when applicable)	Material identification	3.2.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

4.5.1.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operation or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance. In-process inspection shall be conducted to see that accomplished of the following is in accordance with the specification requirements.

4.5.2 Inspection of the end item.

4.5.2.1 Visual examination of name tag. Examination shall be made at a distance of approximately 16 to 18 inches with illumination equal to average daylight and arranged so as to avoid as much reflected light as possible. The defects found during examination shall be classified in accordance with 4.5.2.1.1. The unit of product for the examinations in 4.5.2.1.1 shall be one completely fabricated tag.

4.5.2.1.1 Examination of name tag for defects in finish, design, material, construction, workmanship, and marking. Defects designated by an asterisk (*) shall be classified as major when seriously affecting appearance or serviceability and minor when affecting appearance or serviceability but not seriously.

TABLE III. DEFECTS

EXAMINE	DEFECT	CLASSIFICATION Major	(*)	Minor
Color and finish	Color does not compare favorably with the approved shade sample	x	-	-
	Surface not smooth	-	*	-
	Discoloration, such as spot, stain or speck	-	*	-
	Abraded, scuffed, scratched or otherwise damaged	-	*	-
Workmanship and construction	Not fabricated or specified material	x	-	-
	Detail altered does not conformed to Government drawing	-	*	-
	Any warp, twist or distortion producing irregular surface or outline	-	*	-
	Bent or otherwise impaired	-	*	-
	Pit, dig, gouge, nick, or mutilation	-	*	-
	Burr, fin, rough or sharp edge or flash	-	*	-
	Sections not completely laminated or molded	x	-	-
	Plastic cracked or ruptured	x	-	-
	Defective, i.e., any part damaged affecting use	-	*	-
	Deformed, i.e., any part misshaped, damaged, bent, but not affecting use	-	-	x
	Not type specified	x	-	-
	Not positioned as specified	x	-	-
	Not attached in specified manner	x	-	-
Identification Marking	Missing, incorrect, illegible, misspelled, not accomplished as specified, or not placed			

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

TABLE III. DEFECTS (Continued)

EXAMINE	DEFECT	CLASSIFICATION Major	(*)	Minor
	as required	-	-	x
Attaching device	Defective, i.e., any part damaged or malformed which affects use or which may be expected to affect use	x	-	-

4.5.2.1.2 Examination of name tag for defects in dimensions. Any dimension which is not within the specified tolerance shall be classified as a defect.

4.5.2.2 End item testing. Testing of the completely fabricated tag shall be performed in accordance with Table IV for the characteristics shown therein. There shall be one determination per sample unit and the results shall be reported as pass fail. The sample unit shall be three completely fabricated tags. The requirements are applicable to the individual unit. The sample unit for the test for prong and clutch attaching device shall be one unit. All items shall be tested and one defect will be scored regardless of how many prongs on that item failed.

TABLE IV. TESTING OF END ITEM

Characteristic	Requirement Paragraph	Test Method	# determ Per Sample /Unit	Results Reported as
Pull test for back plate	3.4	4.6.2	1	Pass or fail
Test for prong and clutch	3.4.1	4.6.3	1	Pass or fail

4.5.3 Examination for count of tags for intermediate containers. Tags packaged for shipment shall be examined to determine conformance with package markings and specified quantity. The sample unit for this examination shall be one box (intermediate containers). Any box containing less than the specified or marked quantity of tags shall be classified as a defect. The lot size shall be the number of intermediate containers.

4.5.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted, incorrect, illegible, or improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of envelops or container flaps, insecure seating of fastening device, tissue wrapping incomplete, voids inadequately filled, bulging or distortion of containers, loose strapping or taping, inadequate strapping.
Contents	Number of intermediate packages is more or less than required.
Weight	Net weight exceeds requirements.

4.6 Tests.

4.6.1 Chemical composition test for copper base alloy. Chemical composition shall be determined by standard commercial testing. Results shall be evaluated to determine compliance with the requirements specified in 3.2.2.

4.6.2 Pull test for back plate. With the tag securely mounted in a jig, a ten pound pull shall be applied to one prong and the back plate shall then be examined to determine compliance with 3.4. The procedure shall then be repeated for the second prong.

4.6.3 Test for prong and clutch type. The clutches shall be removed and replaced ten times from the prong using the clutch release wings. An attempt shall then be made to remove the clutch by hand without first depressing the release wings. An inspection shall be made at this time of the clutch and prong to determine compliance with the requirements specified in 3.4.1.

5. PACKAGING

5.1 Preservation. Preservation shall be Level C or Commercial, as specified (see 6.2).

5.1.1 Level C.

5.1.1.1 Unit packaging and intermediate packaging. One hundred (100) name tags with clutch fasteners attached shall be individually wrapped in not less than three thicknesses of commercial type tissue paper. An alternate method of unit and intermediate packaging shall be as follows: One hundred (100) name tags with clutch fasteners attached shall be placed face to face, two each to a cell, in a partitioned snug fitting paperboard box conforming to Type I, Variety 1, Style 4 of PPP-B-676. NOTE: If tissue wrapped identification tags are furnished, partitioned boxes are not required. Closure shall be made in accordance with the appendix of the container specification. Each intermediate container shall be marked "Remove the Protective Masking Film prior to Engraving."

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial. Name tags shall be preserved in accordance with the applicable requirements of ASTM-D-3951.

5.2 Packing. Packing shall be Level C or Commercial as specified (see 6.2).

5.2.1 Level C. Name tags preserved as specified in 5.1 shall be packed in a snug-fitting fiberboard shipping container conforming to Class domestic, Grade 275 of PPP-B-636. Closure shall be in accordance with the appendix of the container specification. The weight of the contents of each shipping container shall not exceed the size and weight limitations of the container specification.

5.2.2 Commercial. Name tags shall be preserved in accordance with the applicable requirements of ASTM-D-3951.

5.3 Marking. In addition to any special marking required by the contract or purchase order, unit packages, intermediate boxes, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM-D-3951 as applicable. Unit package marking may be printed on the reverse of the mounting card provided the printing is continuous and is legible through the bag.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Name tags covered by this specification are intended to be used by Air Force personnel to indicate the wearer's name.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).

c. When a first article is not required (see 3.1).

d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item should be a preproduction sample, a first production sample or a standard production item from the contractor's current inventory as specified in 4.4. The first article should consist of one completed item. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or tests, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

6.4 Subject term (key word) listing.

Name tag
Prong and Clutch
Back Plate

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - IH
Air Force - 45

Review activities:
Air Force - 32, 82, 99
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0762)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

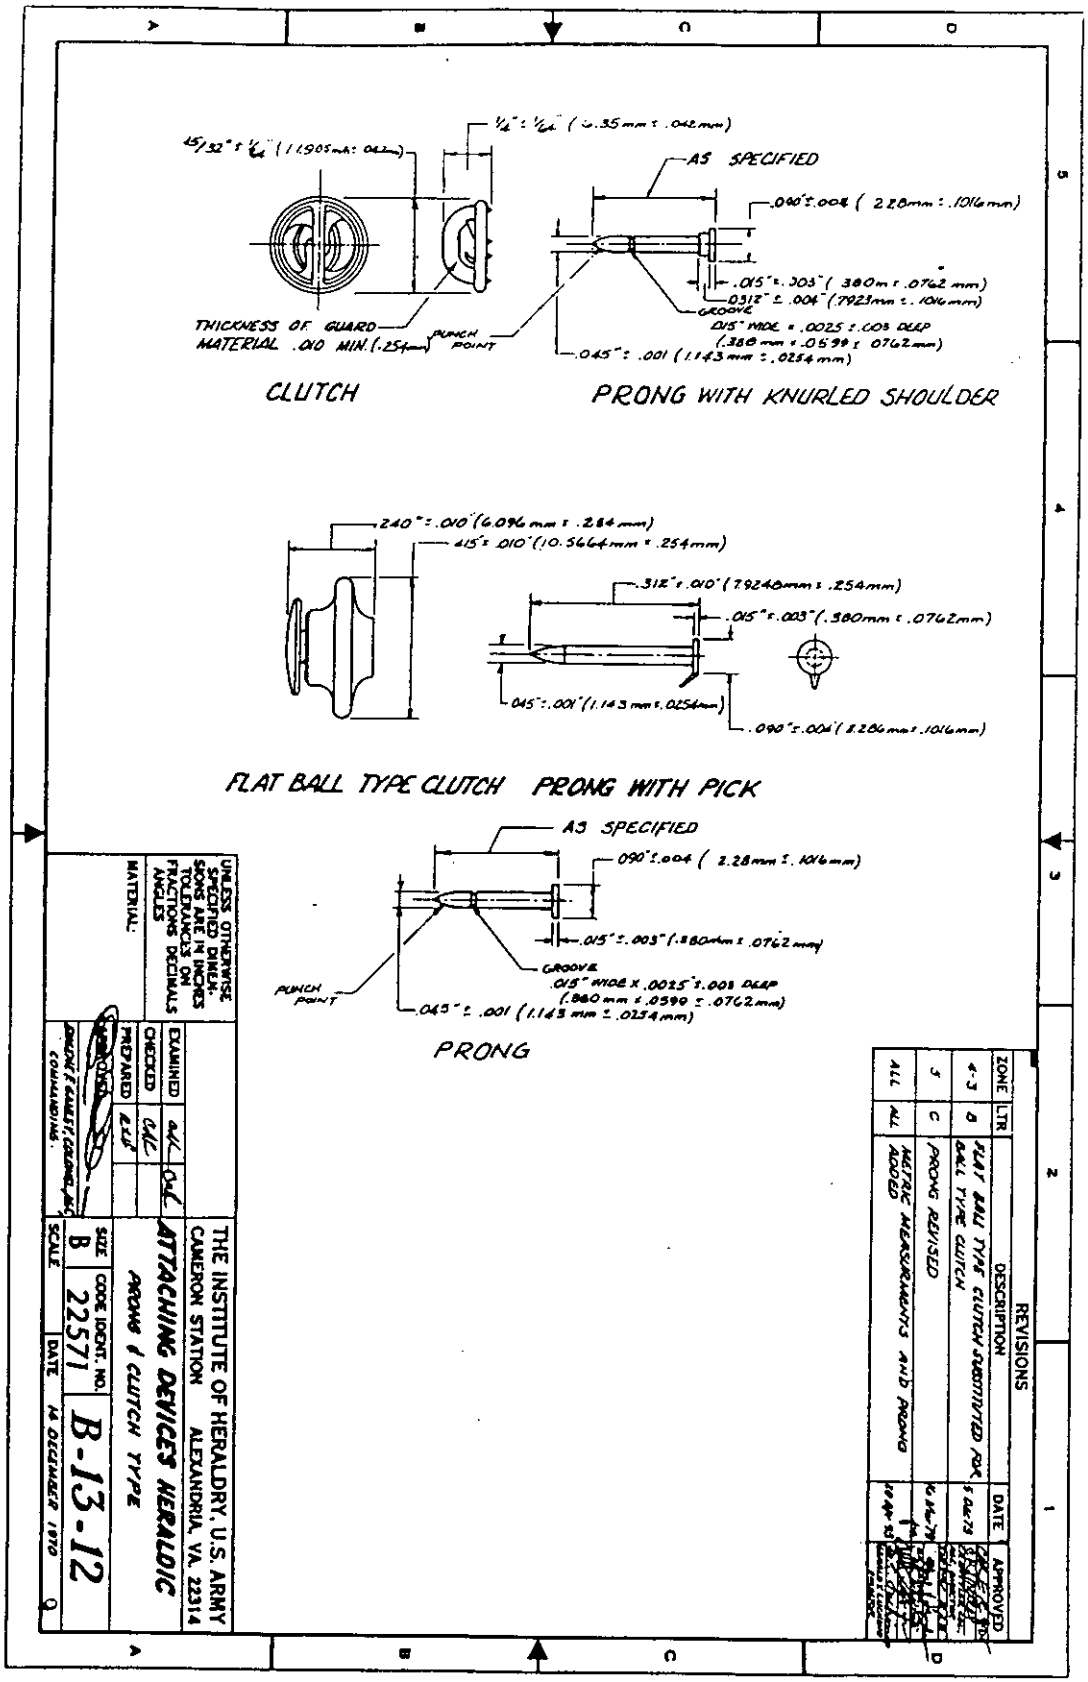


FIGURE 1. Attaching Devices, Heraldic, Prong & Clutch Type

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

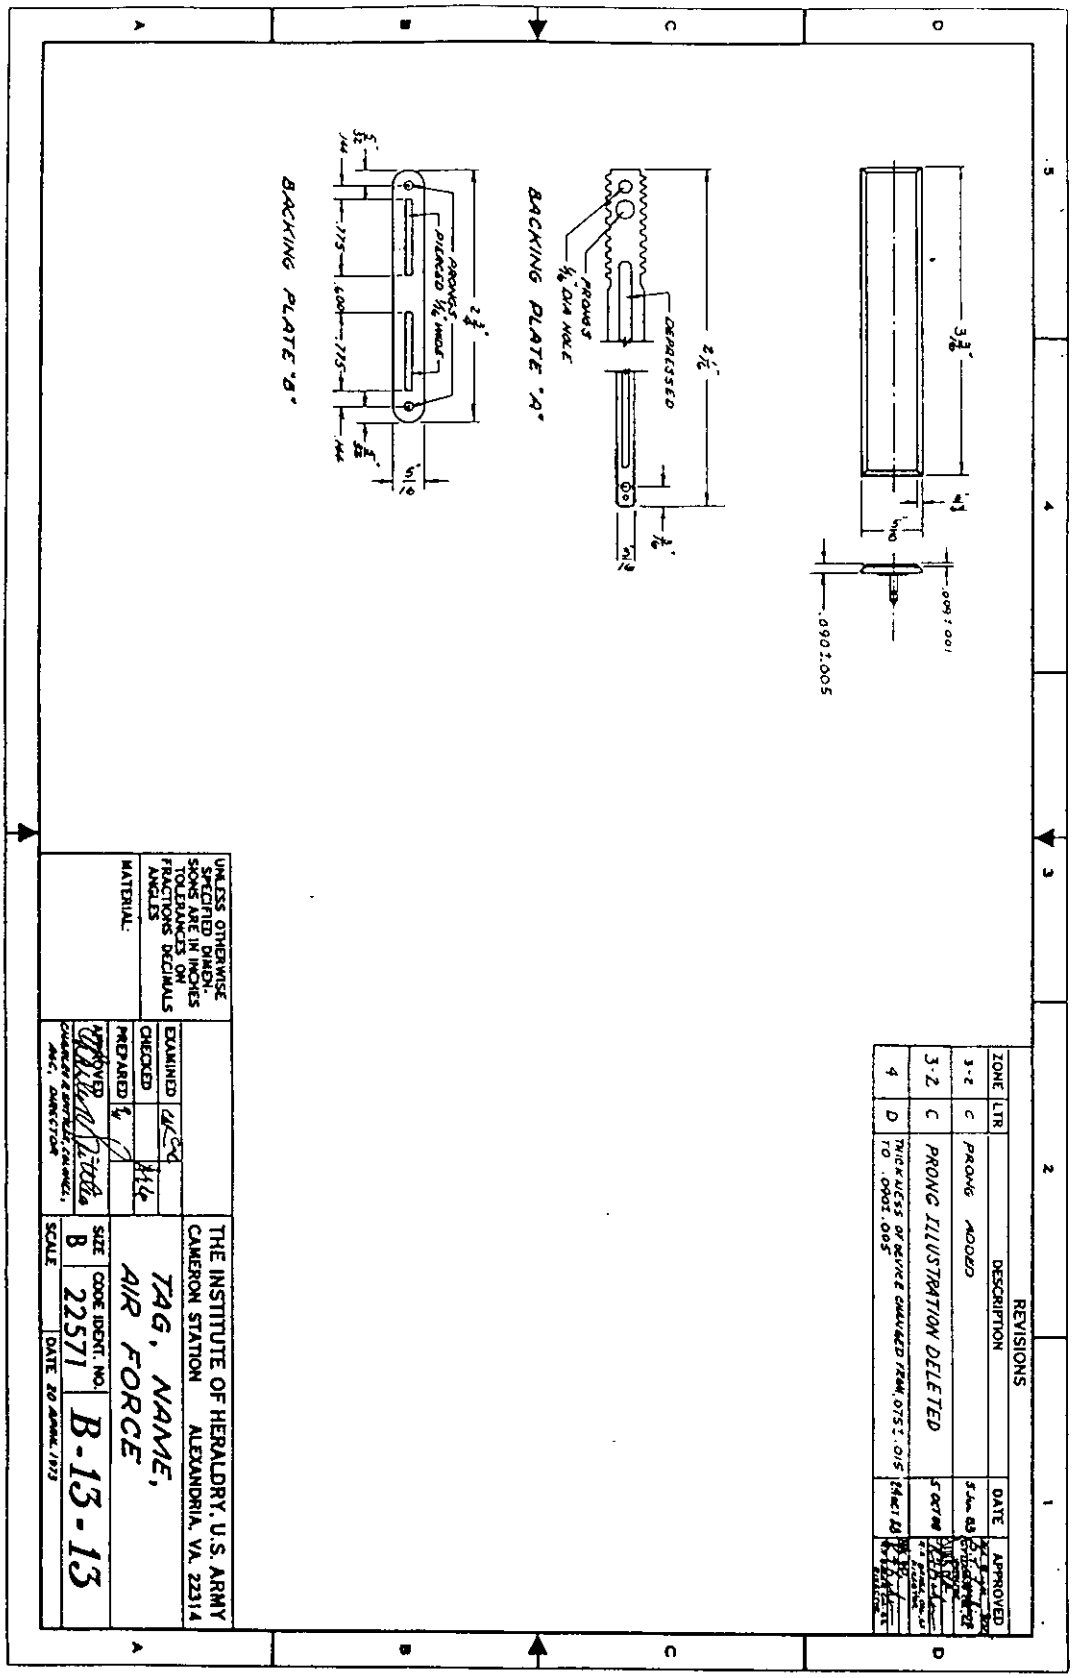


FIGURE 2. Tag, Name, Air Force

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-T-14643C	941025

3. DOCUMENT TITLE
TAG, IDENTIFICATION, INDIVIDUAL, PLASTIC, AIR FORCE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
THE INSTITUTE OF HERALDRY, U.S. ARMY	(703) 806-4990	DSN 656-4990
c. ADDRESS (Include Zip Code) Technical & Production Division 9325 Gunston Road, Room S112 Fort Belvoir, VA 22060-5579	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:15Z
Check the source to verify that this is the current version before use.