INCH-POUND

MIL-C-10387J
INTERIM AMENDMENT 1(ME)
2 February 1994

MILITARY SPECIFICATION

COUPLINGS, CLAMP, PIPE; WITH BOLTS AND SYNTHETIC-RUBBER GASKETS

FOR GROOVED-END PIPE

This interim amendment is approved for use within the US Army Belvoir Research, Development, and Engineering Center, Department of the Army, with MIL-C-10387J, dated 10 April 1992.

PAGE 1

1.1, delete in its entirety and substitute:

"1.1 Scope. This specification covers clamp-type couplings, with bolts and gaskets, for grooved-end pipe, used with fuel and petroleum applications."

1.2, line 4, after "Coupling or gasket" add "class".

PAGE 3

2.2, under "AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)" after "A 108", add:

"A 183 - Carbon Steel Track Bolts and Nuts.
A 331 - Steel Bars, Alloy, Cold-Finished."

PAGE 5

3.4, lines 3 thru 6, delete third sentence in its entirety and substitute: "The amount of flexibility on cut grooved pipe (per figure 1) shall be in accordance with table I. On roll grooved pipe, the deflection shall be half these values."

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.

Table I, delete in its entirety and substitute:

Nominal Pipe Size Inches	Flexibility (cut Grooved Pipe)	
	Minimum	Maximum
3/4	2°40'	7°0'
1	2°10'	5°45'
1-1/4	1°10'	4°35'
1-1/2	1°0'	4°0'
2	1°55'	3°15'
2-1/2	1°16'	2°45'
3	1°3'	2°15'
3-1/2	0°54'	2°42'
4	2°12'	3°25'
5	2°10'	2°25'
6	1°21'	2°25'
8	1°3'	1°55'
10	50'	1°35'
12	42'	1°25'
14	38'	1°15'

PAGE 6

Table II, under "Requirements" column:

"Original Properties", "Hardness, Shore A Durometer, points" row, delete "60 ±10" and substitute "50-75".

"Low temperature properties after extraction in," "Compression Set (% maximum)" row, delete "55" and substitute "60".

"After immersion in distille water (med. #10)", "Volume change "(% maximum)", delete "15" and substitute "25".

PAGE 7

3.6.1, line 1, after "ASME B18.10", add "ASTM A183, grade 2".

Line 4, delete "type II, classification Fe-Zn-13" and substitute "thickness 13, Fe-Zn-12".

3.6.2, first sentence, delete in its entirety and substitute: "If retaining pins are used in lieu of bolts and nuts, pins shall be manufactured of ASTM A 108, grade 1045 carbon steel, or of ASTM A 331, grade 4140, grade 4142, grade 4340, or grade 6150, heat treated to Rockwell C hardness of 30 to 40."

Lines 4 and 5, delete "type II, classification Fe-Zn-13" and substitute "thickness 13, Fe-Zn-12".

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.

3.7, delete in its entirety and substitute:

"3.7 Pressure ratings. Ductile/malleable iron or steel couplings (of the nominal pipe size) shall meet the working and test pressure ratings in table III on standard wall steel pipe. Aluminum couplings shall meet the working and test pressure ratings in table III on standard wall steel, aluminum, or stainless steel pipe. Couplings shall be tested to hydrostatic pressures as shown in table III for a period of not less than 5 minutes without evidence of leakage or permanent deformation."

PAGES 7 AND 8

3.9, delete in its entirety and substitute:

"3.9 Treatment and painting. Unless otherwise specified (see 6.2), all exterior surfaces of couplings shall be cleaned, treated and painted in accordance with the manufacturer's standard commercial practice, using water-based acrylic emulsion alkyd enamel, or in accordance with MIL-T-704, type A, topcoat color in accordance with FED-STD-595, color no. 33446."

PAGE 9

4.5.2.1, line 3, delete "table V" and substitute "table III".

PAGE 10

4.5.2.2, line 2, delete "table IV", and substitute "table II".

PAGE 11

6.2.e., delete in its entirety and substitute:


"e. When treatment and painting is other than as specified (see 3.9)."

PAGE 12

6.4, delete in its entirety and substitute:

"6.4 Part or identifying number (PIN). The PIN to be used for couplings covered acquired to this document are created as follows (see 6.2):

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:59Z
Check the source to verify that this is the currentversion before use.

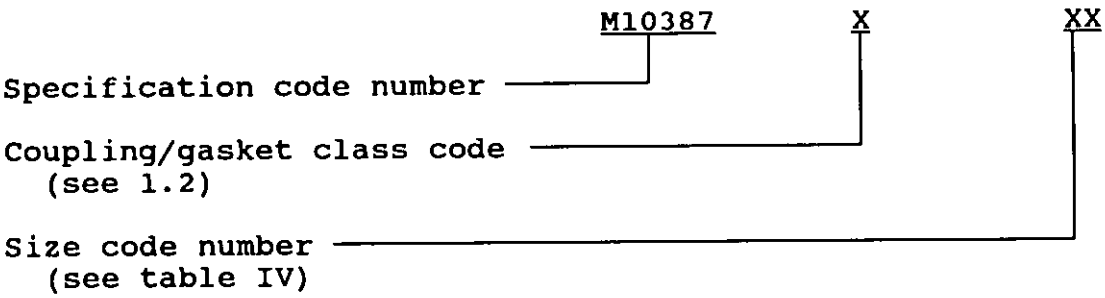

Example: M10387A05 couplings of aluminum alloy and 2 inches in size, conforming to MIL-C-10387."

TABLE IV. Nominal size code.

Nominal size (inches)	Size Code Number
3/4	01
1	02
1-1/4	03
1-1/2	04
2	05
2-1/2	06
3	07
3-1/2	08
4	09
5	10
6	11
8	12
10	13
12	14
14	15

Figure 1, nominal pipe size "5", under column D: delete "5.295 + 0.000" and substitute "5.395 + 0.000".

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 4730-A110

Review activity:
Army - CE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.