MIL-M-10323A(MU)
Amendment 4
30 April 1973
SUPERSEDING
Amendment 3
22 November 1971

MILITARY SPECIFICATION

MOUNT, TELESCOPE: M48

This amendment forms a part of Military Specification MIL-M-10323A(MU), dated 16 October 1967.

Paragraph 3.6 Accuracy, Add the following:

"3.6 Accuracy.- The accuracy requirements shall be met with a Periscope B.C. M65, or its equivalent in weight and geometry, in place on the mounting spindle of the mount."

* Paragraph 3.6.1: Delete and substitute:

"3.6.1 Azimuth reading.- Error of any azimuth reading shall not exceed 2.0 mils, excluding backlash."

Paragraph 3.6.2: Delete and substitute:

"3.6.2 Backlash.- Backlash in the azimuth and orienting worm mechanism shall not exceed 2.0 mil in each mechanism.

Paragraph 3.7.1: Delete and substitute:

"3.7.1 Azimuth knob.- The torque required to rotate the azimuth knob shall be within a minimum of 12 to a maximum of 52 inch-ounces."

Paragraph 3.7.2: Delete and substitute:

"3.7.2 Orienting knob.- The torque required to rotate the orienting knob shall be within a minimum of 12 to a maximum of 52 inch-ounces."

Paragraph 4.2: Delete paragraph and substitute:

"4.2 First article (initial production) approval.- The requirement for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of 3 mounts plus 3 each of all items covered by SOAP. The sample shall be manufactured in the same manner, using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:56Z
Check the source to verify that this is the current version before use.

Add new paragraphs 4.2.1 and 4.2.2 as follows:

"4.2.1 Government testing.- When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to insure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certificates of conformance for materials.

4.2.2 Contractor testing.- When the contractor is responsible for conducting first article approval tests, the sample shall in inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certificates of conformance for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection."

Paragraph 4.6.4 Accuracy: Add the following:

4.6.4 Accuracy.- The tests in 4.6.4.1, through 4.6.4.5 shall be performed utilizing a dummy load simulating Periscope, B.C. M65, with the approximate weight, outside dimension and configuration as shown in Figure I. The dummy load shall be mounted vertically on the mounting spindle of Telescope Mount: M48. Secure the dummy load to the spindle by means of its socket head set screw."

Paragraph 6.1, line 2 and4: Change "Telescope" to "Periscope".

Paragraph 6.2, under Ordering data: Add "d. Requirement for first article testing."

Add Figure 1.

The outside margins have been marked to indicate where additions to the previous amendment have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in this notation. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notation and relationship to the last previous amendment.

Custodian:

Army - (MU)

Preparing Activity:

Army - (MU)

Project No. 1240-A500

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:56Z
Check the source to verify that this is the current version before use.

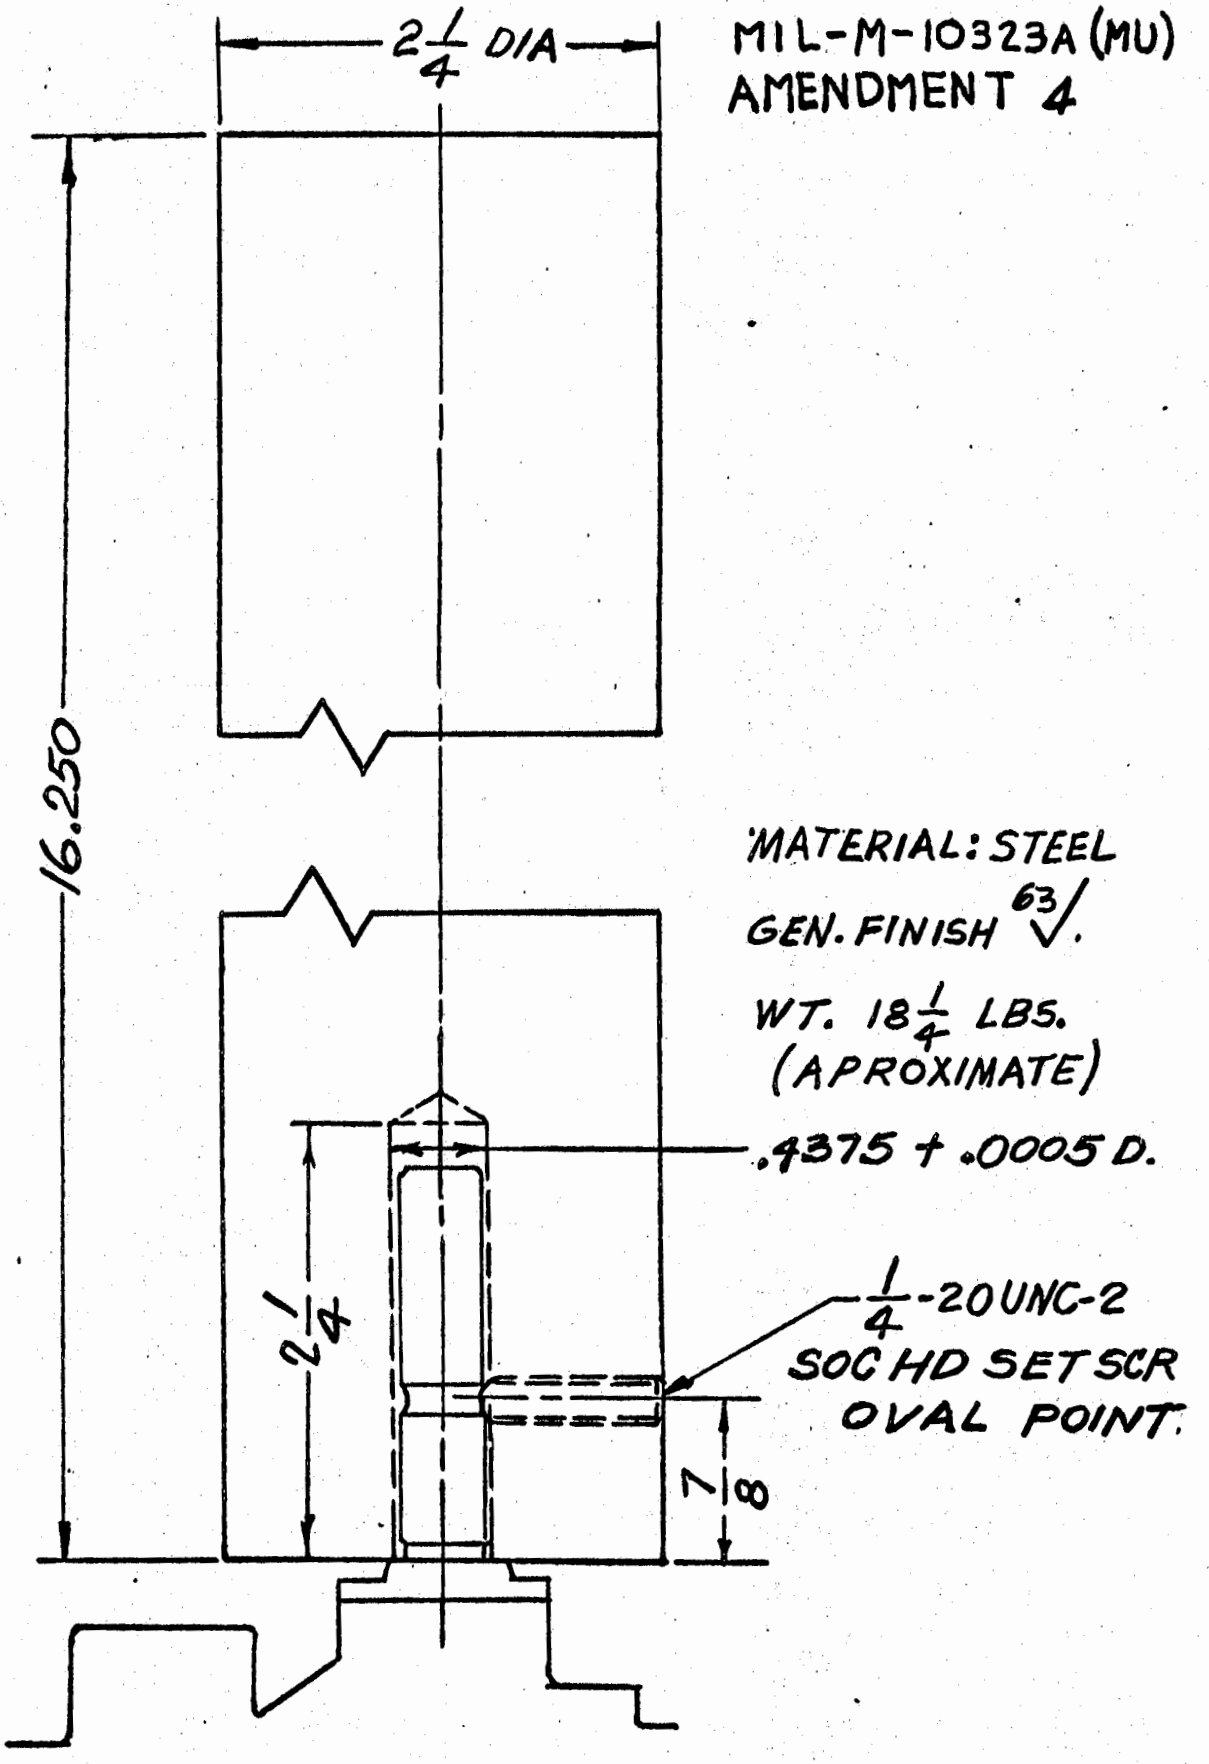


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:56Z
Check the source to verify that this is the current version before use.