INCH-POUND

MIL-V-10386E(ME)
20 December 1989
SUPERSEDING
MIL-V-10386D(ME)
19 April 1977

MILITARY SPECIFICATION

VALVES, CHECK: SWING, CAST-IRON AND STEEL

This specification is approved for use within the USA Belvoir Research, Development and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers cast-iron and steel swing check valves designed for liquid or gaseous petroleum products.

1.2 Classification. Valves shall be of the following sizes and classes, as specified (see 6.2).

Size	
2-inch	12-inch
3-inch	14-inch
4-inch	16-inch
6-inch	18-inch
8-inch	20-inch
10-inch	24-inch

Class	Material Code
125-pound	I - Cast Iron
150-pound	
250-pound	II - Steel
300-pound	
400-pound	
600-pound	

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4820

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.

1.2.1 International standardization agreements. Certain provisions of this specification, including all dimensions of the valves, connections, and sizes of pipe, are the subject of international standardization agreements, NATO STANAG 2761 and QSTAG 240 (see 6.6).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.

MILITARY

MIL-V-3	- Valves, Fittings, and Flanges (Except for Systems Indicated Herein); Packaging of.
MIL-P-116	- Preservation, Methods of.
MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-P-5315	- Packing, Preformed, Hydrocarbon Fuel Resistant.
MIL-C-14076	- Cleaning Element, Pipeline, Fluid Pressure, Brush Type.
MIL-C-46168	- Coating, Aliphatic Polyurethane, Chemical Agent Resistant.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-889	- Dissimilar Metals.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN; NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

ANSI B16.1	- Cast-Iron Pipe Flanges and Flanged Fittings.
ANSI B16.5	- Pipe Flanges and Flanged Fittings.
ANSI B16.10	- Face-to-Face and End-to-End Dimensions of Ferrous Valves.
ANSI B16.25	- Buttwelding Ends.
ANSI B18.2.2	- Square and Hex Nuts.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

AMERICAN PETROLEUM INSTITUTE (API)

API SPEC 5B	- Threading, Gaging, and Thread Inspection.
API SPEC 6D	- Steel Gate, Plug and Check Valves for Pipeline Service.

(Application for copies should be addressed to the American Petroleum Institute, Division of Production, 1220 L Street N.W., Washington, D.C. 20005.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 126	- Gray Iron Castings for Valves, Flanges and Pipe Fittings.
ASTM A 307	- Standard Specification for Carbon Steel Bolts and Studs, 60,000 psi Tensile Strength.
ASTM A 449	- Quenched and Tempered Steel Bolts and Studs.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)

MSS SP-6	- Standard Finishes for Contact Faces of Pipe Flanges and Connecting-End Flanges of Valves and Fittings.
MSS SP-25	- Marking System for Valves, Fittings, Flanges and Unions.
MSS SP-71	- Cast-Iron Swing Check Valves, Flanged and Threaded Ends.

(Application for copies should be addressed to the Manufacturers Standardization Society of the Valve and Fittings Industry, 127 Park Street, N.E., Vienna, VA 22180.)

(Non-Government standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for associated detail specifications, specification sheets, or MS standards), the text of this

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.

specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The swing check valves (hereinafter called "valves") are high-pressure-type valves for use with liquid or gaseous petroleum products.

3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3 in accordance with 4.3).

3.3 Materials. Materials shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Material deterioration prevention and control. The valves shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the valves may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available on request to the contracting officer or designated representative.

3.3.2 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the valves may be newly fabricated from recovered materials to the maximum extent practicable, provided the valves produced meet all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the valves.

3.4 Design. The valves shall be designed to perform as specified herein with liquid or gaseous petroleum products. Flow lines through the valves shall be streamlined. The 6-, 8-, and 12-inch valves shall pass a brush-type pipeline cleaner conforming to MIL-C-14076. Valve port openings shall be full opening. The minimum bore, inside diameter (ID) for each valve size shall be as follows:

Nominal valve size (inches)	Minimum bore ID (inches)
2	2
3	3
4	4
6	6
8	8
10	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.

Nominal valve size (inches)	Minimum bore ID (inches)
12	12
14	13.25
16	15.25
18	17.25
20	19.25
24	23.25

3.4.1 Cast-iron valves. Cast-iron valves shall conform to MSS SP-71. Unless otherwise specified (see 6.2), the seating shall be bronze.

3.4.2 Steel valves. Steel valves shall be manufactured in conformance to API SPEC 6D, shall be as specified herein, and shall be either cast or forged steel.

3.4.2.1 Seats. Unless otherwise specified (see 6.2), steel valves shall be furnished with O-ring clapper ring seats conforming to MIL-P-5315.

3.4.2.2 Metal-to-metal seats. Unless otherwise specified (see 6.2), seating material of valves having metal-to-metal seats shall be 11.5- to 13.5-percent chromium steel.

3.4.2.3 O-ring clapper seals. When specified (see 6.2), the seal between clapper and body seat faces shall be an elastomeric ring securely lodged in a dovetail groove positioned in either the clapper or body seat face. The elastomeric ring shall be field removable and replaceable, and shall be chosen for suitability in the service specified. In the absence of any such specification, the elastomer shall be suitable for fuels containing aromatics.

3.4.3 Outside lever and weight. When specified (see 6.2), valves shall be equipped with an outside lever and weight. The hinge pin shall extend through a pressure-tight stuffing box in the side of the valve body. The lever shall be keyed and locked to the hinge pin. The weight shall be adjustable along the length of the lever. Set screws or jam nuts shall secure the weight to the lever. Unless otherwise specified (see 6.2), the lever and weight shall balance the disc.

3.4.4 Flow indicator. Each valve body shall have an arrow on both sides to indicate the direction of flow through the valve. These arrows may be cast or stamped in the metal or attached by spot welding or brazing. The edges of the arrows shall be rounded.

3.4.5 End connections. Valve ends shall be flanged, threaded, or beveled for welding (steel valves only), as specified (see 6.2). Threaded ends shall not be furnished on valves with end connections larger than 4 inches.

3.4.5.1 End flanges. End flanges shall be integral with the valve body. Flange facings and drilling for cast-iron valves shall conform to ANSI B16.1. Flange facings and drilling for cast carbon steel valves shall conform to ANSI B16.5. The flanges shall be finished on the joint side in accordance with MSS SP-6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.

3.4.5.1.1 End flange gaskets. Unless otherwise specified (see 6.2), end flange gaskets shall be fabricated from 0.062-inch material.

3.4.5.1.2 End flange bolting. When specified (see 6.2), end flange bolting shall be furnished. Bolts shall have regular square or heavy hexagonal heads or may be of the bolt-stud type with dimensions conforming to ANSI B18.2.2. Material for bolts, bolt-studs, and nuts for cast-iron valves shall conform to ASTM A 307, grade B. Material for bolts or bolt- studs for steel shall conform to ASTM A 449.

3.4.5.2 Threaded ends. Valve ends shall be threaded with internal NPT threads conforming to API SPEC 5B.

3.4.5.3 Welding ends. Steel valve ends shall be beveled for welding in accordance with ANSI B16.25, figure 2 or 3, as applicable.

3.4.6 End-to-end dimensions. End-to-end dimensions shall conform to ANSI B16.10.

3.4.7 Covers. Covers for steel valves shall be castings, forgings, or steel plates. Material for the cast-iron valve covers shall be in accordance with ASTM A 126, grade B or C. The covers shall be removable for access to the interior of the valves.

3.4.7.1 Cover bolting. Bolts for the cast-iron covers shall conform to ASTM A 307, grade B and shall be of the stud, bolt-stud, bolt, or capscrew type. Bolts shall have heavy, unfinished, hexagonal heads. Bolts and studs for the carbon steel covers shall conform to ASTM A 449. All bolts shall be wet assembled.

3.5 Performance. The valves shall perform as specified herein at the applicable working and test pressures when tested in accordance with MSS SP-71 for cast-iron valves and API SPEC 6D for steel valves. When subjected to test pressures, the valves shall not show deformation of the body, cover, or seat, and seat leakage allowance shall be as specified in MSS SP-71 and API SPEC 6D.

3.6 Treatment and painting. The portions of the valve normally painted shall be cleaned, treated, and painted in accordance with MIL-T-704, type F or G, as applicable. Top coat color shall be camouflage green 383, and conform to MIL-C-46168.

3.7 Identification marking. The valves shall be identified in conformance with MIL-STD-130. The marking shall be applied to the valves on plates conforming to MIL-P-514, type I, style 3, composition A, of type I, grade A, class 1 material. Each plate shall be attached by screws, bolts, or rivets in a conspicuous, protected location.

3.7.1 Body marking. Body marking shall conform to MSS SP-25.

3.8 Workmanship. The quality of workmanship shall be such as to produce valves that are in accordance with the requirements of this specification and are constructed to ensure proper functioning of all parts of the unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.

3.8.1 Edge rounding. Where applicable, all exposed edges and corners shall be rounded to a minimum of 0.3-inch radius. Sharp edges and corners that present a personal safety hazard or potential damage to equipment during usage shall be suitably protected or rounded.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. The contractor is responsible for ensuring that components and materials used are manufactured, examined, and tested as specified in referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 First article examination. The first article shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 First article tests. The first article shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall conform to MIL-STD-105, inspection level III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.

4.4.2 Examination.

4.4.2.1 Individual. Each valve shall be examined for the critical defect specified in 4.5.1. Presence of the critical defect shall be cause for rejection.

4.4.2.2 Samples. Samples selected as specified in 4.4.1 shall be examined for the defects specified in 4.5.1.

4.4.3 Tests.

4.4.3.1 Samples. Samples selected as specified in 4.4.1 shall be tested as specified in 4.5.2.

4.5 Inspection procedure.

4.5.1 Examination. The valves shall be examined for the following defects.

Number	Defects	Requirement paragraph
Critical		
1.	Holes in casting.	3.4.1
Major		
101.	Check valve not as specified.	3.1
102.	First article not as specified.	3.2
103.	Materials not as specified.	3.3
104.	Materials not resistant to corrosion and deterioration, or treated to be resistant to corrosion and deterioration for the applicable storage and operating enviornments.	3.3.1
105.	Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other.	3.3.1.1
106.	Contractor does not have documentation available for identification of material, material finishes, or treatment.	3.3.1.2
107.	Used, rebuilt or remanufactured components, pieces, or parts incorporated in the valves.	3.3.2
108.	Design of valve not as specified.	3.4
109.	Cast-iron valve not as specified.	3.4.1
110.	Steel valve not as specified.	3.4.2
111.	O-ring clapper ring seat not as specified.	3.4.2.1
112.	Metal-to-metal seats not as specified.	3.4.2.2
113.	O-ring clapper seal not as specified.	3.4.2.3
114.	Outside lever and weight not as specified.	3.4.3
115.	Flow indicator not as specified.	3.4.4
116.	End connection not as specified.	3.4.5
117.	End flange, end flange gasket, and end flange bolting not as specified.	3.4.5.1, 3.4.5.1.1, 3.4.5.1.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.

118.	Threaded end and welding end not as specified.	3.4.5.2, 3.4.5.3
119.	End-to-end dimensions not as specified.	3.4.6
120.	Cover not as specified.	3.4.7
121.	Cover bolting not as specified.	3.4.7.1
122.	Performance not as specified.	3.5
123.	Treatment and painting not as specified.	3.6
124.	Identification marking not as specified.	3.7
125.	Body marking not as specified.	3.7.1
126.	Workmanship not as specified.	3.8
127.	Edges and corners not as specified.	3.8.1

4.5.2 Pressure tests. The valves shall be subjected to pressure tests conforming to MSS SP-71 for cast-iron valves and API SPEC 6D for steel valves. Nonconformance to 3.5 shall constitute failure of the applicable test.

4.6 Inspection of packaging. The preservation, packing and marking of the valves shall be examined to determine compliance with the applicable quality assurance provisions of MIL-V-3 and any additional requirements in section 5 specified herein.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Valves. The valves shall be preserved in conformance to MIL-V-3, level A.

5.1.1.2 Flange bolts. Bolts required for each valve shall be coated with type P-1 preservative conforming to the applicable specification listed in MIL-P-116 and shall be applied in conformance to MIL-P-116. The bolts shall be reinstalled in the flanges and the nuts shall be drawn hand-tight.

5.1.1.3 Flange gaskets. Flange gaskets required for each valve shall be preserved together in conformance to MIL-P-116, method IC-1. The gaskets shall be placed with the valve and shall be cushioned to afford protection from abrasion.

5.1.2 Level C.

5.1.2.1 Valves. Each valve shall be preserved in accordance with the applicable level C requirements of MIL-V-3.

5.1.2.2 Flange bolts and gaskets. Flange bolts, and flange gaskets shall be preserved to afford protection against corrosion, deterioration and damage during shipment and handling from the contractor to the initial destination.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Valves with components shall be packed in accordance with MIL-V-3, level A, except that only boxes conforming to PPP-B-601, overseas type or PPP-B-621, class 2, shall be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Valves with components shall be packed in accordance with MIL-V-3, level B, except that fiberboard boxes shall be class weather-resistant.

5.2.3 Level C. Valves with components shall be packed in accordance with the applicable level C requirements of MIL-V-3.

5.3 Marking. In addition to any special or identification markings required by contract or purchase order (see 6.2), marking shall be in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The valves covered by this specification are primarily intended for use in high-pressure pipelines carrying liquid or gaseous petroleum products.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. Size and class of valve required, (see 1.2).
d. When a first article is not required (see 3.2).
e. Timeframe required for submission of first article valve and number of valves required (see 3.2).
f. Seating material required if other than bronze (see 3.4.1).
g. Type of seats required for steel valves if other than specified (see 3.4.2.1).
h. Seating material required for metal to metal seats if other than specified (see 3.4.2.2).
i. When O-ring clapper seal is required (see 3.4.2.3).
j. When an outside lever and weight are required (see 3.4.3).
k. When the lever and weight are not required to balance the disc (see 3.4.3).
l. Type valve ends required for steel valves (see 3.4.5).
m. When end-flange gaskets shall be fabricated from material other than specified (see 3.4.5.1.1).
n. Whether end-flange bolting shall be furnished (see 3.4.5.1.2).
o. Level of preservation and packing required (see 5.1 and 5.2).
p. Any special marking (see 5.3).
q. PIN number if required (see 6.7).

6.3 First article. When a first article inspection is required, the item(s) should be an initial production model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.

bidders offering such products, who wish to rely on such production or test, must urnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.


6.4 Subject term (key word) listing.

Valve, cast-iron.
Valve, check.
Valve, steel.
Valve, swing.
Valve, swing check.

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

6.6 International standardization. Certain provisions of this specification are the subject of international standardization agreement NATO STANAG 2761 and QSTAG 240. When amendment, revision, or cancellation of this specification is proposed that will modify the international agreement concerned, the preparing activity will take appropriate action through international standardization channels including departmental standardization offices to change the agreement or make other appropriate accommodations.

6.7 Part or identifying number. The PIN number of valves covered by this specification shall be designated in the following form (see 6.2):

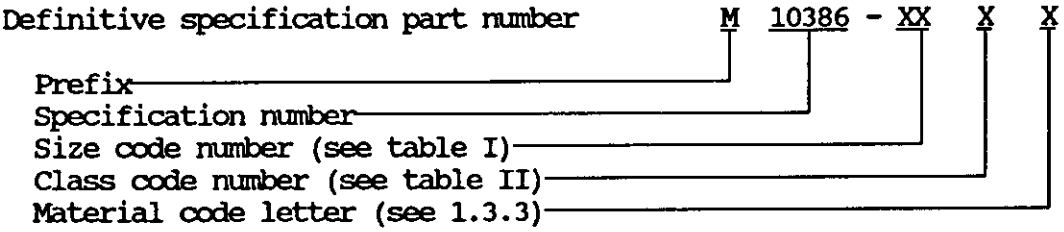

Example: M10386-21B is the definitive specification part number for 2-inch (A), 125-pound class (1), steel (B) swing check valves covered under MIL-V-10386.

6.7.1 Size code. See table I.

TABLE I. Size code.

Size Code	Description
2	2-inch
3	3-inch
4	4-inch
6	6-inch
8	8-inch
10	10-inch
12	12-inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.

TABLE I. Size code (Cont).

Size Code	Description
14	14-inch
16	16-inch
18	18-inch
20	20-inch
24	24-inch

6.7.2 Class code. See table II.

TABLE II. Class code.

Code	Class
a	125-pound
b	150-pound
c	250-pound
d	300-pound
e	400-pound
f	600-pound

6.7.3 Material code. The definitive specification part number shall have material code "A" for cast-iron valves or code "B" for steel valves.

6.8 AQL certification. This specification is certified to be in compliance with current Army Materiel Command (AMC) policy for the elimination of AQL's/LTPD's (Acceptable Quality Levels/Lot Tolerance Percent Defectives) from military specifications.

(Certified by/date: 12/20/87).

Custodian:
Army - ME

Review activity:
DLA - CS

User activity:
Army - CE

Preparing activity:
Army - ME

(Project 4820-A456)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

US ARMY BELVOIR RDE CENTER
ATTN: STRBE-TSE
Ft. Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-V-10386E	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-17T13:59Z
Check the source to verify that this is the current version before use.