NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/46
27 June 1996
SUPERSEDING
MIL-I-3575/5D
23 May 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, AIDE, SECRETARY AND UNDER SECRETARY OF THE ARMY, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

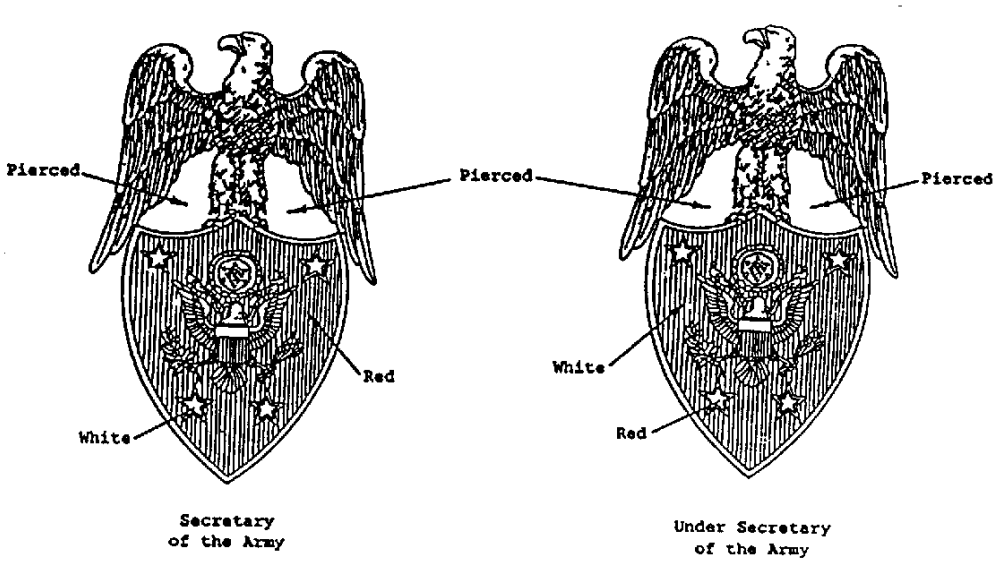

DASH NO.
-1: Aide, Secretary of the Army, Regular
-2: Aide, Under Secretary of the Army, Regular
-3: Aide, Secretary of the Army, Subdued
-4: Aide, Under Secretary of the Army, Subdued

MATERIAL:
-1, -2: EAGLE AND SHIELD: Gilding Metal
DEVICE: Red Brass or Gilding Metal
-3, -4: Red Brass or Zinc Aluminum

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:45Z
Check the source to verify that this is the current version before use.

FINISH:
-1, -2: EAGLE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Chip Number 8.
SHIELD: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Chip Number 6.
DEVICE: Gold Plated, Matte Finish and shall match TIOH Metal Chip Number 7.
-3: Dull Flat Black Enamel
-4: Dull Flat Brown Enamel

DIMENSIONS:
EAGLE AND SHIELD:
HEIGHT (Overall): 1-1/4 inches (3.18 cm) (REF)
WIDTH (Overall): 13/16 inch (2.06 cm) (REF)
THICKNESS (At Thickest Point on Shield): 0.080 inch ± 0.005 inch (0.203 cm ± 0.012 cm)
DEVICE:
HEIGHT (Overall): 3/8 inch (0.95 cm) (REF)
WIDTH (Overall): 11/32 inches (0.87 cm) (REF)
THICKNESS (At Thickest Point): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. Dash No. -1 and -2 are identical with the exception of the colors of the shield and stars.

4. Enameled colors for Dash No. -1 and -2 shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below or the standard sample:

COLOR	CHIP NO.
Red	1
White	28

5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

6. The device shall be superimposed and secured to the shield by two rivets or soft soldered. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center line of the device. The device shall be located on the insignia as indicated.

7. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line, equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) apart.

8. The enamel for Dash No. -3 shall match FED-STD-595 Chip No. 37038.

9. The enamel for Dash No. -4 shall match FED-STD-595 Chip No. 20095.

10. Insignia for Dash No. -1 and -2 may be manufactured using 22 karat gold plate with nickel underplating as follows for commercial sale only:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:45Z
Check the source to verify that this is the current version before use.

-1, -2:	EAGLE:	Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Chip Number 11.
	SHIELD:	Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Chip Number 9.
	DEVICE:	Gold Plated, Matte Finish and shall match TIOH Metal Chip Number 10.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0844)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:45Z
Check the source to verify that this is the current version before use.