NOT MEASUREMENT SENSITIVE


MIL-DTL-15665/46B
4 January 2021
SUPERSEDING
MIL-DTL-15665/46A
14 March 2016

DETAIL SPECIFICATION SHEET

INSIGNIA, AIDE, SECRETARY AND UNDER SECRETARY OF THE ARMY, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.

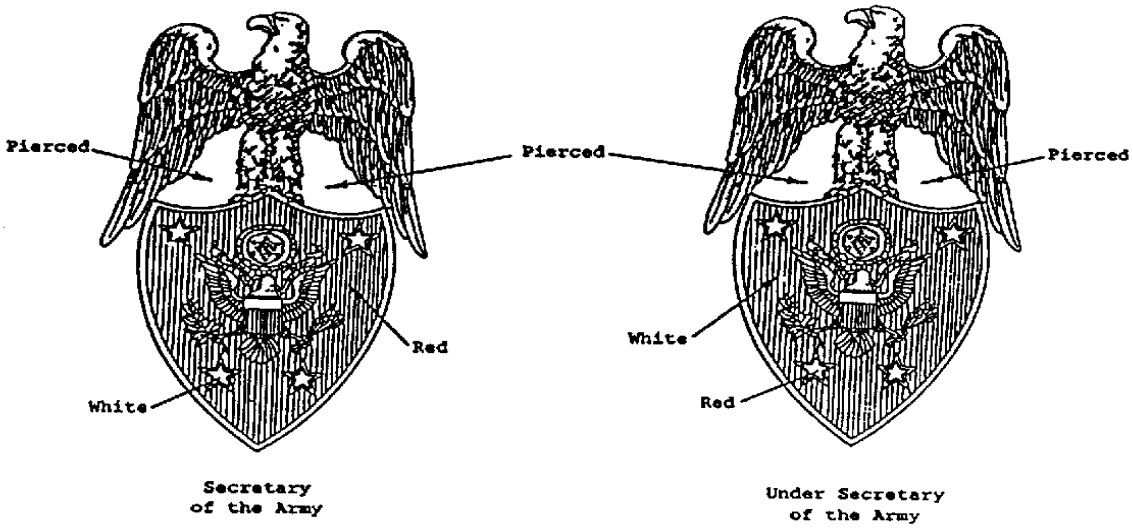

DASH NO.
-1: Aide, Secretary of the Army, Regular
-2: Aide, Under Secretary of the Army, Regular
-3: Aide, Secretary of the Army, Subdued
-4: Aide, Under Secretary of the Army, Subdued

MATERIAL: Red Brass 85/15 (UNS Alloy C-230) or Zinc Aluminum

FINISH:
-1, -2: EAGLE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
SHIELD: Epoxy resin, 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:45Z
Check the source to verify that this is the current version before use.

DEVICE: 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

-3: Dull Flat Black Enamel and shall match TIOH Metal Finish Chip Number 21.

-4: Dull Flat Brown Enamel and shall match TIOH Metal Finish Chip Number 22.

DIMENSION:
EAGLE AND SHIELD:
HEIGHT (Overall): 1-1/4 inches (REF)
WIDTH (Overall): 13/16 inch (REF)
THICKNESS (At thickest point on shield): 0.080 ± 0.005 inch
DEVICE:
HEIGHT (Overall): 3/8 inch (REF)
WIDTH (Overall):11/32 (REF)
THICKNESS (At thickest point): 0.060 ± 0.005 inch

ATTACHING DEVICE:
1. Attaching device shall be prong and wing type clutch.

2. Prongs shall be located on the vertical center line, equidistant from each end and 7/8 inch ± 1/64 inch apart.

EPOXY: Epoxy resin shall be applied to the Insignia as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy No.C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
White	#28

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. For -1 and -2 are identical with the exception of the colors of the shield and stars.

4. The device shall be superimposed and secured to the shield by two rivets or soft soldered. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center line of the device. The device shall be located on the insignia as indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:45Z
Check the source to verify that this is the current version before use.

5. Insignia -1 and -2 may be manufactured using 22 karat gold plate with nickel under plating as follows for commercial sale only:
-1, -2: EAGLE: 22K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Chip Finish Number 11.
SHIELD: Epoxy resin, 22K Gold Plated, Mirror-like Polished and shall match TIOH Metal Chip Finish Number 9.
DEVICE: 22K Gold Plated, Matte Finish and shall match TIOH Metal Chip Finish Number 10

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-146)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:45Z
Check the source to verify that this is the current version before use.