NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/48
27 June 1996
SUPERSEDING
MIL-I-3575/57C
23 May 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, AIDE, CHAIRMAN AND VICE CHAIRMAN, JOINT CHIEFS OF STAFF, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

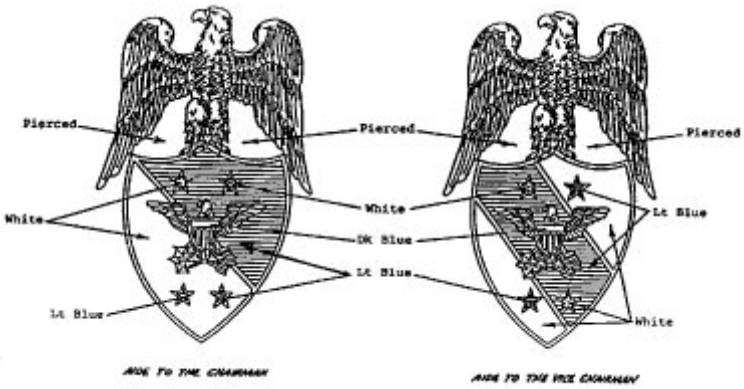

DASH NO.
-1: Aide, Chairman, JCS, Regular
-2: Aide, Vice Chairman, JCS, Regular
-3: Aide, Chairman, JCS, Subdued
-4: Aide, Vice Chairman, JCS, Subdued

MATERIAL:
-1, -2: Gilding Metal
-3, -4: Red Brass or Zinc Aluminum

FINISH:
-1, -2: EAGLE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
SHIELD: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
DEVICE: Hard Enameled, Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.
-3, -4: Dull Flat Black Enamel.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:46Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
EAGLE AND SHIELD:
HEIGHT (Overall): 1-1/4 inches (3.18 cm) (REF)
WIDTH (Overall): 13/16 inch (2.06 cm) (REF)
THICKNESS (At Thickest Point on Shield): 0.080 inch ± 0.005 inch (0.203 cm ± 0.012 cm)
DEVICE:
HEIGHT (Overall): 9/32 inch (0.71 cm) (REF)
WIDTH (Overall): 1/2 inch (1.27 cm) (REF)
THICKNESS (At Thickest Point): 0.045 inch ± 0.005 inch (0.114 cm ± 0.012 cm)

ASSEMBLED THICKNESS): 0.145 inch ± 0.010 inch (0.368 cm ± 0.012 cm)

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. Enameled areas shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below or the standard sample:

COLOR	CHIP NO.
Red	1
Blue	18
White	28
Light Blue	33

4. The stripes of the shield shall be enameled with alternating white and red; beginning with white and ending with white. The enamel colors shall match the TIOH color chip numbers listed in Note 3.

5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

6. The device shall be superimposed and secured to the shield by two rivets or soft soldered. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center line of the device. The device shall be located on the insignia as indicated.

7. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line, equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) apart.

8. The dull flat black enamel for Dash No. -3 and -4 shall match FED-STD-595 Chip No. 37038.

9. Insignia for Dash No. -1 and -2 may be manufactured using 22 karat gold plate with nickel underplating as follows for commercial sale only:

EAGLE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 11.

SHIELD: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 9.

DEVICE: Hard Enameled, Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:46Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0844)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:46Z
Check the source to verify that this is the current version before use.